REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1130160~163	2011/02/25	Jiang Jun Hua	REF. TO ECR/N.NOTE.

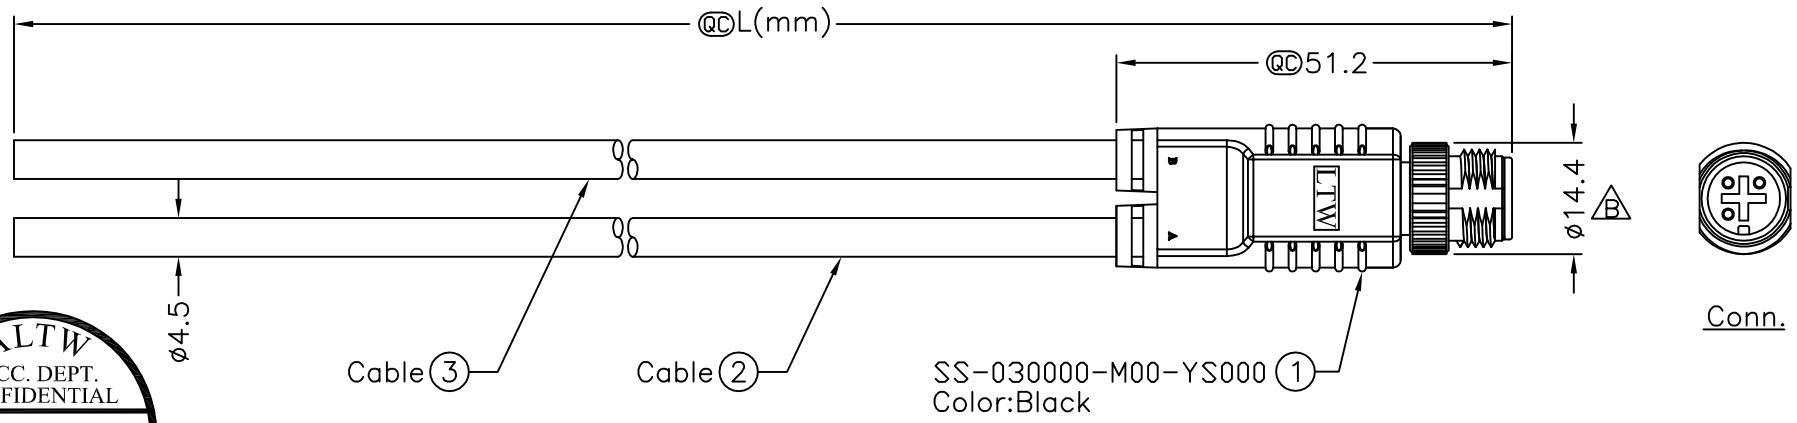

ALTW
DCC. DEPT.
CONFIDENTIAL
2011.03.09
ISSUED

ALTW
CONFIDENTIAL
2011.02.25
R&D DEPT.

SS-030000-M00-YSBXX

XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

Note:
* QC Important Dimension.
B * Waterproof Rate:IP68.
IP68:1M Depth Of Water In 24hours.
* Housing:PU,Black.
* Male Pin:Copper Alloy,Gold Plated.
* Cable:22AWG*3C+Talcum,PU Jacket,Black, OD=4.5mm.
B * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Conn.	A	B
4	Black 黑	Black 黑
3	Blue 藍	Blue 藍
1	Brown 棕	Brown 棕
	Wire Color	
	B Pin Out	

UNIT:mm	TITLE: M12 Cable Screw 3Pin M Conn M Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY: Jiang Jun Hua	DATE: 2011/02/25
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1		DWG NO: SS-030000-M00-YSBXX	CHECKED BY: Tina	DATE: 2011/02/25
	REV.: B / SIZE: A4 / QC :Inspection Item		CUSTOMER: ALTW	APPROVED BY: Can	DATE: 2011/02/25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.