

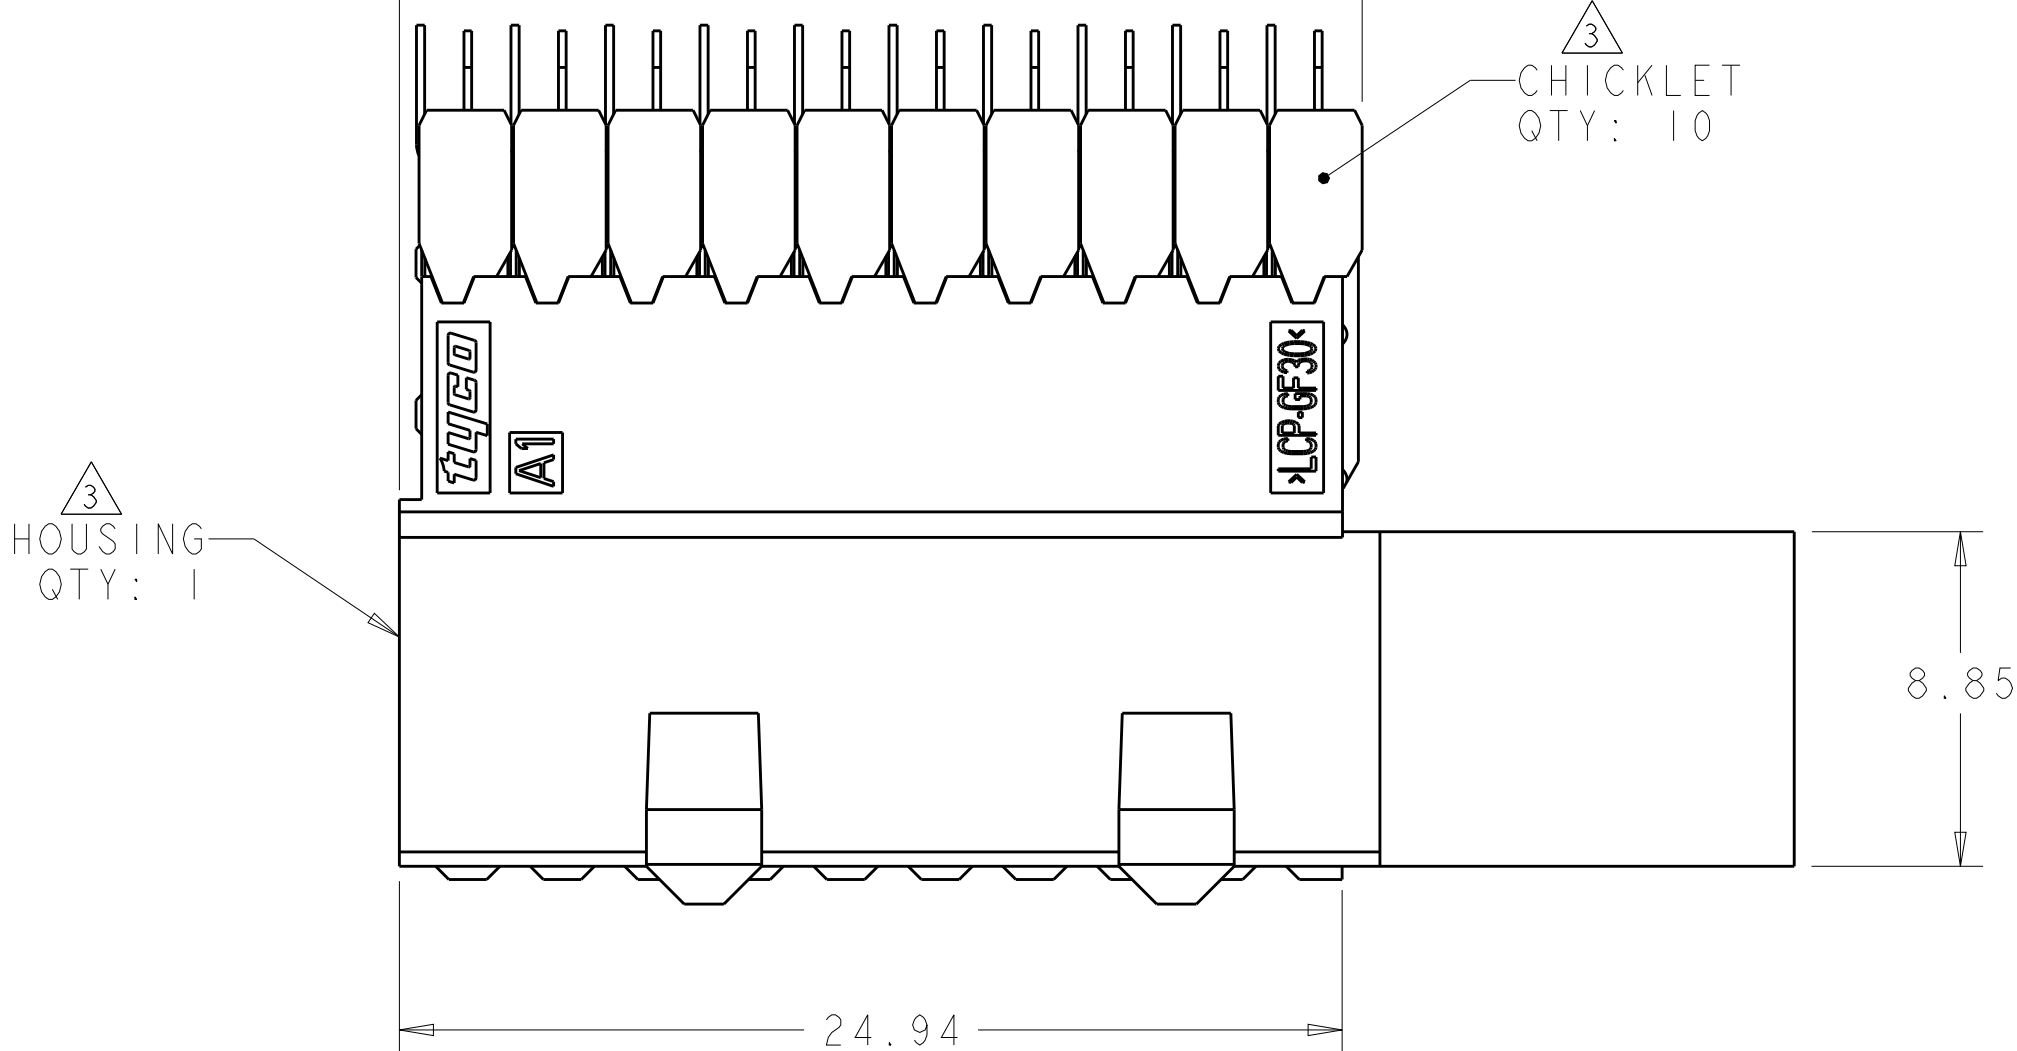
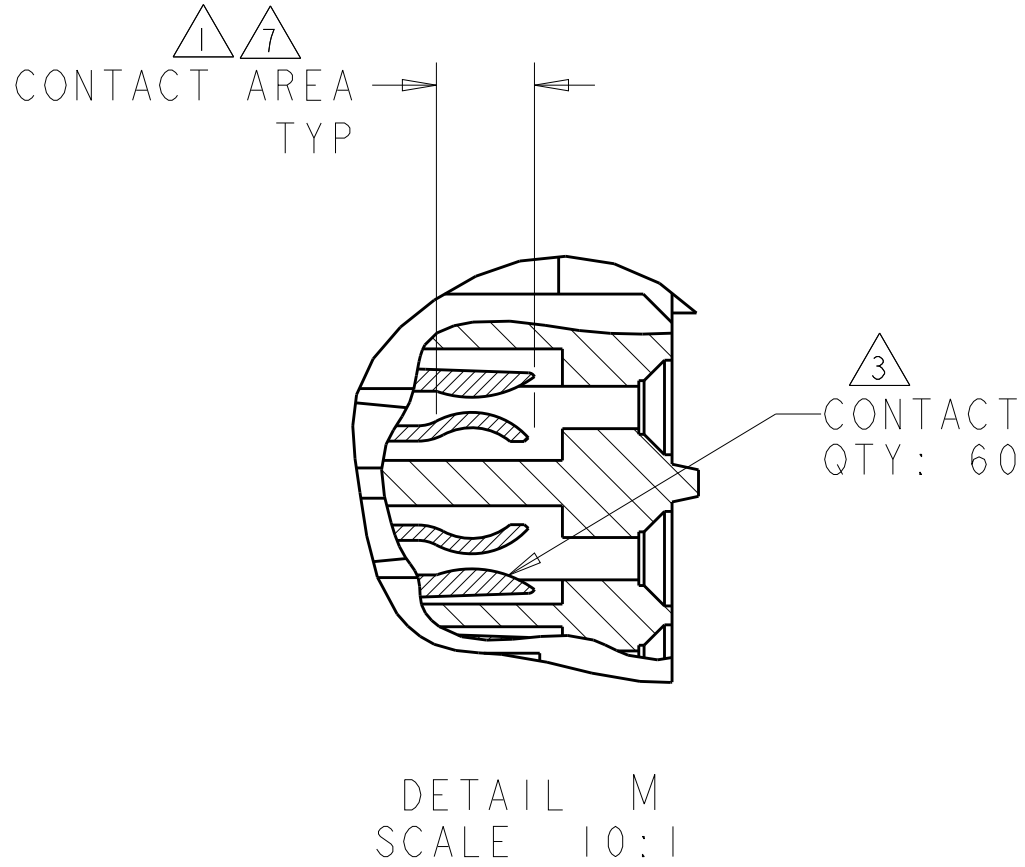
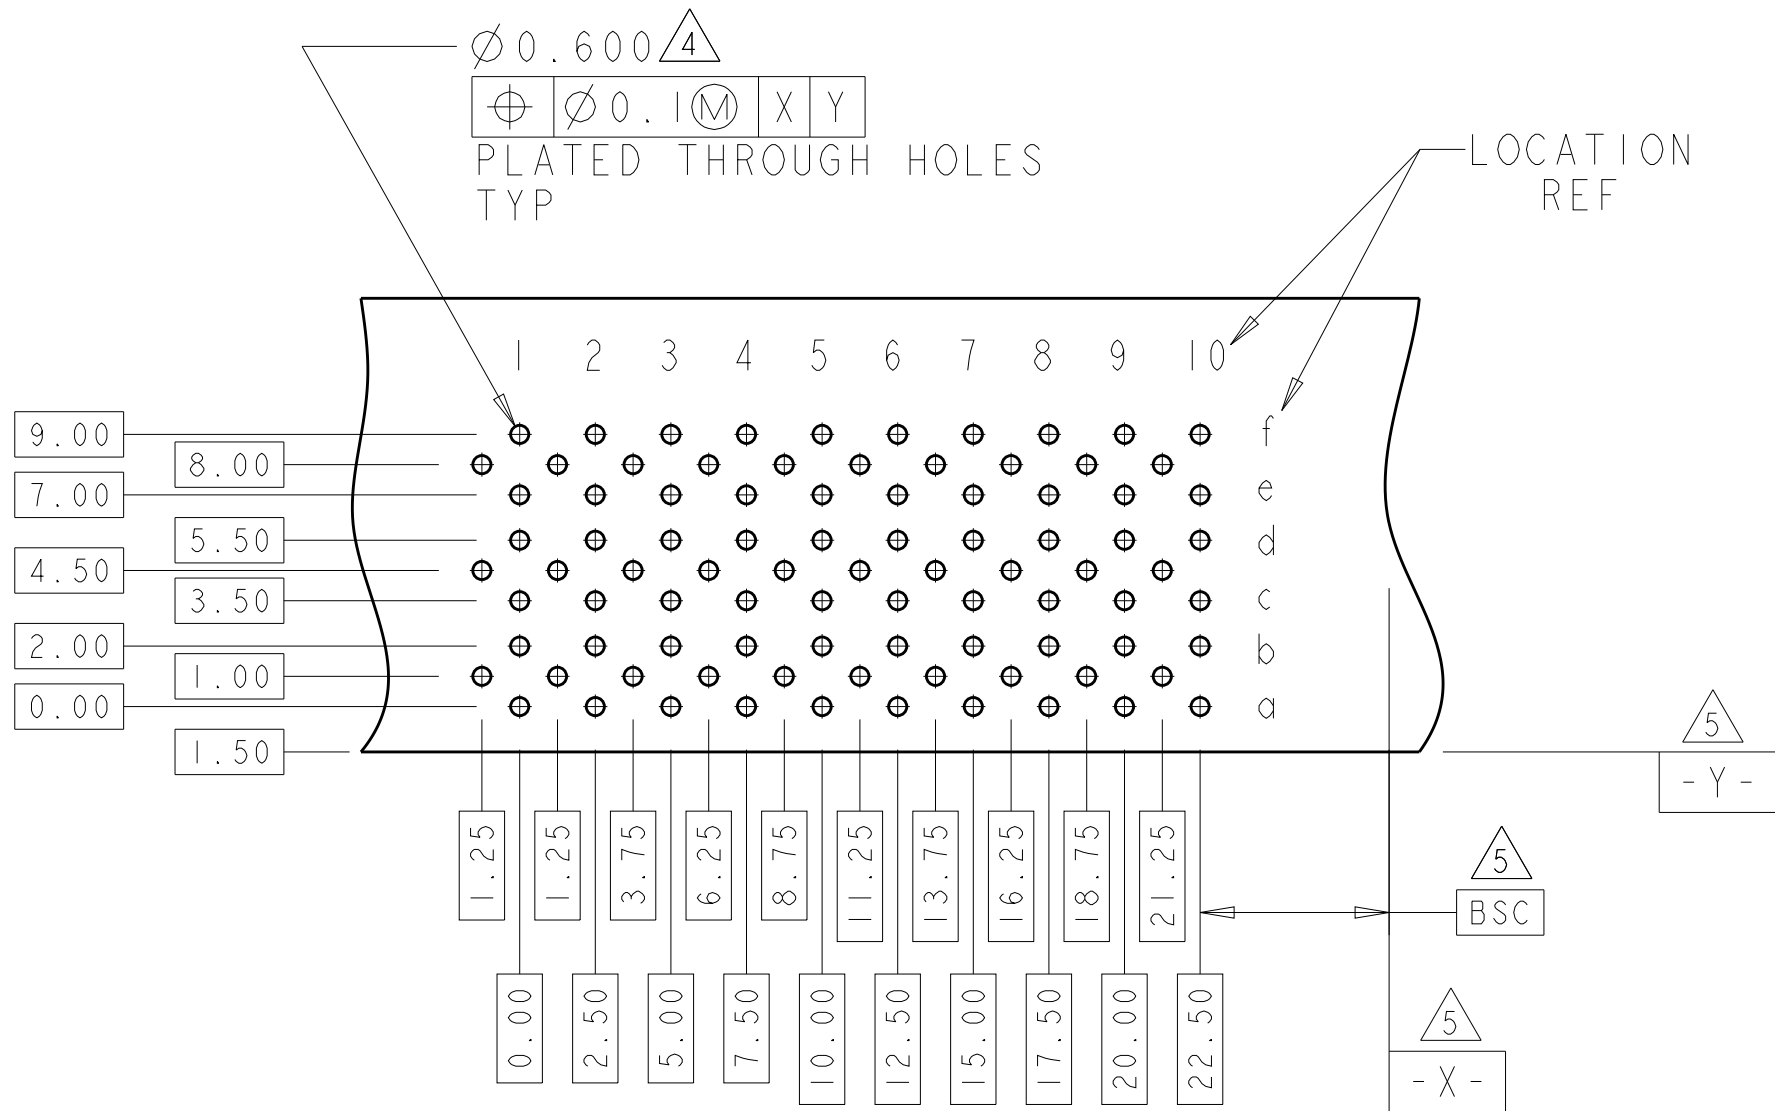
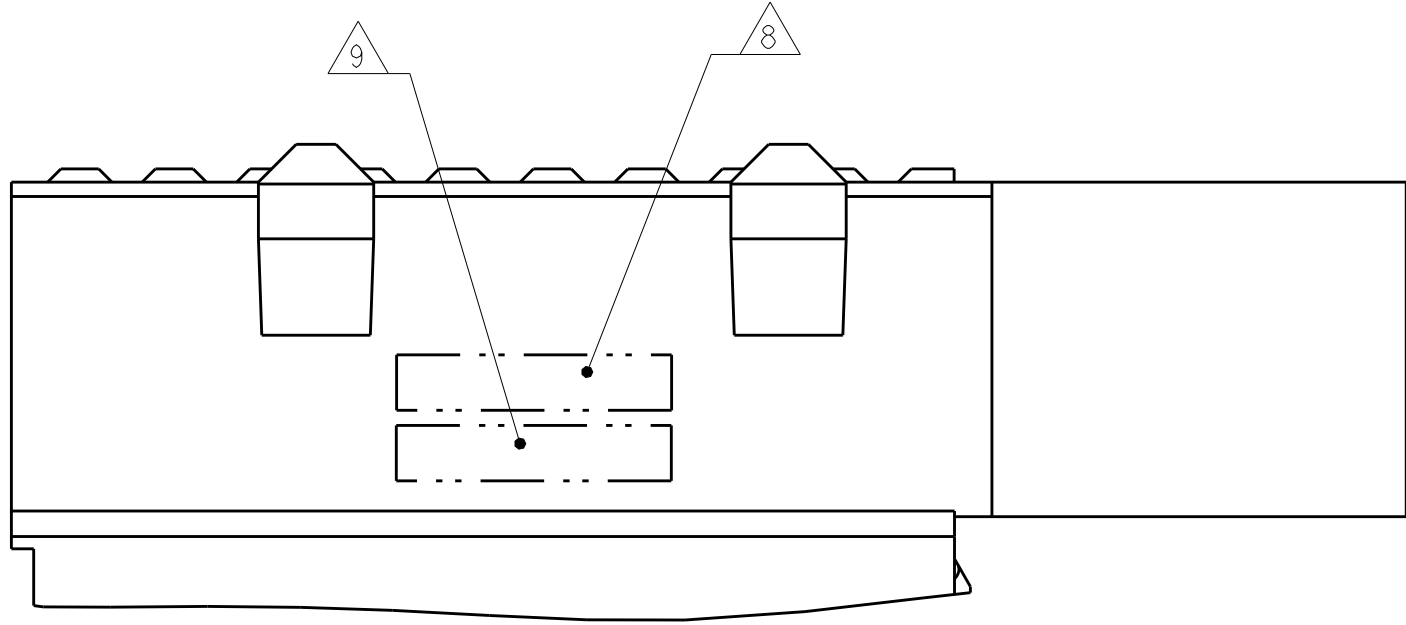



LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A	RELEASED	26SEP2012	-	JE

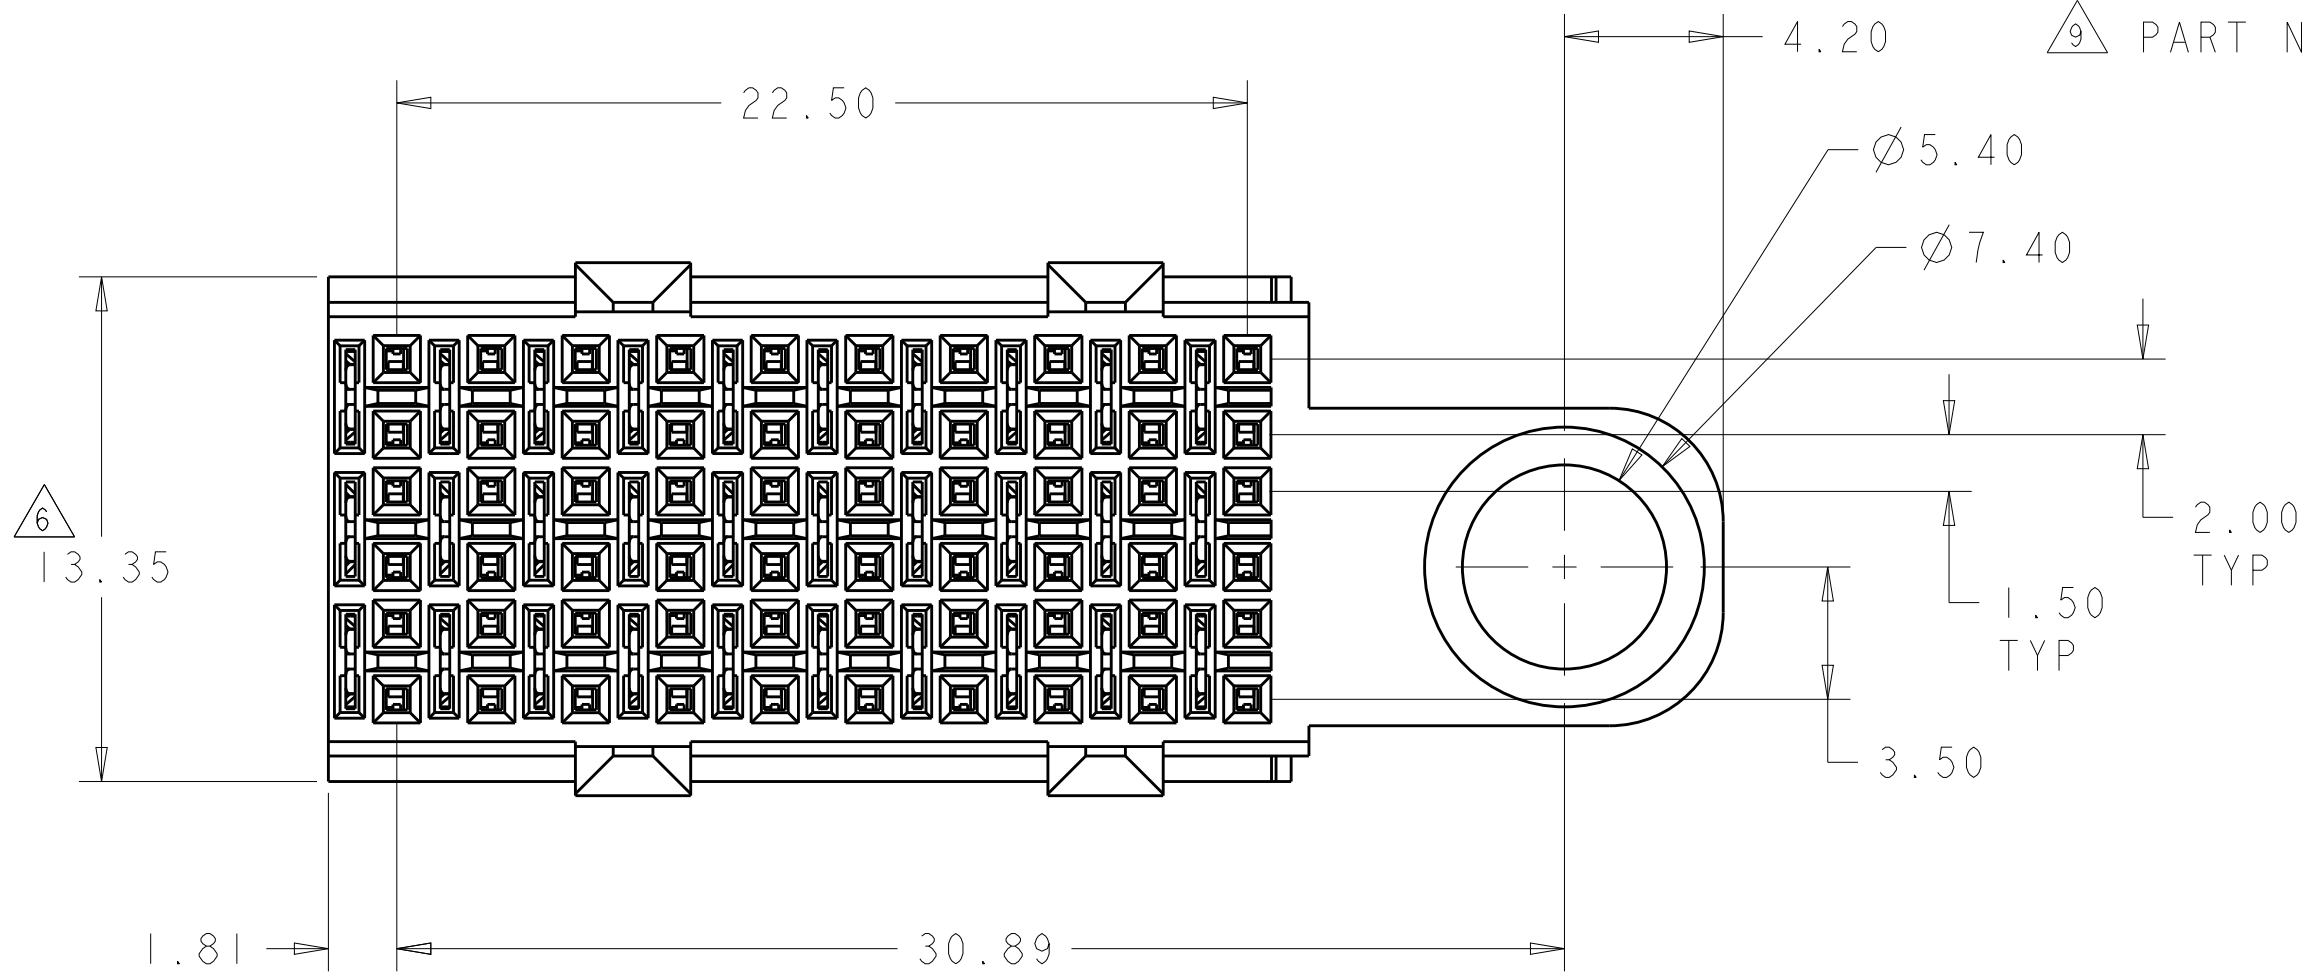

- 1 CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 2 0.76µm MIN MATTE TIN OVER 1.27µm MIN NICKEL
- 3 MATERIAL:
CONTACT - COPPER ALLOY
SHIELD - PHOSPHER BRONZE
HOUSING AND CHICKLET - GLASS FILLED POLYESTER
- 4 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS
- 5 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER
- 6 SEATING HEIGHT TO BOARD SURFACE
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- 8 DATE CODE
- 9 PART NUMBER

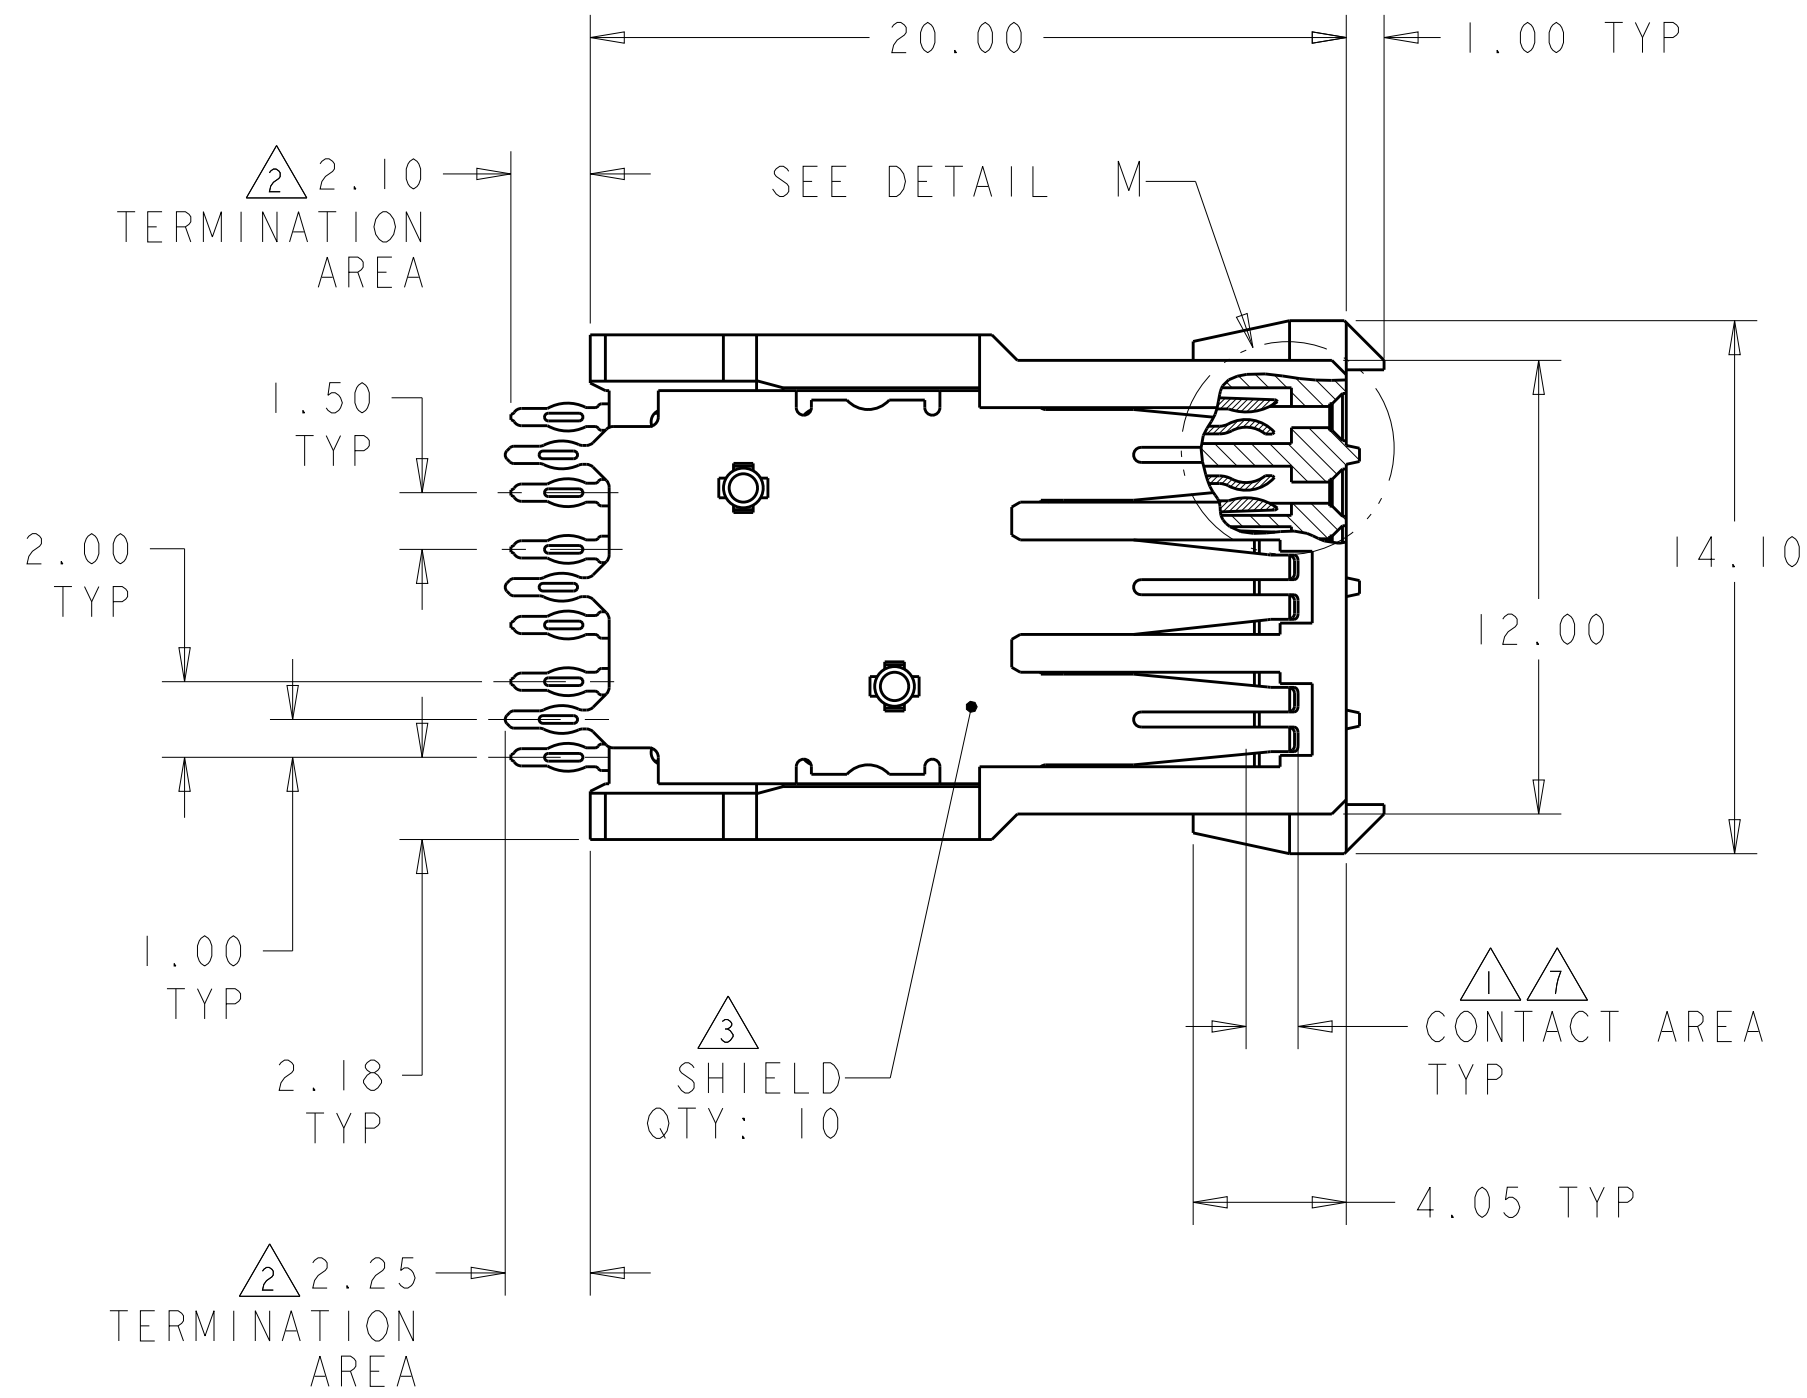

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD
SCALE 4:1

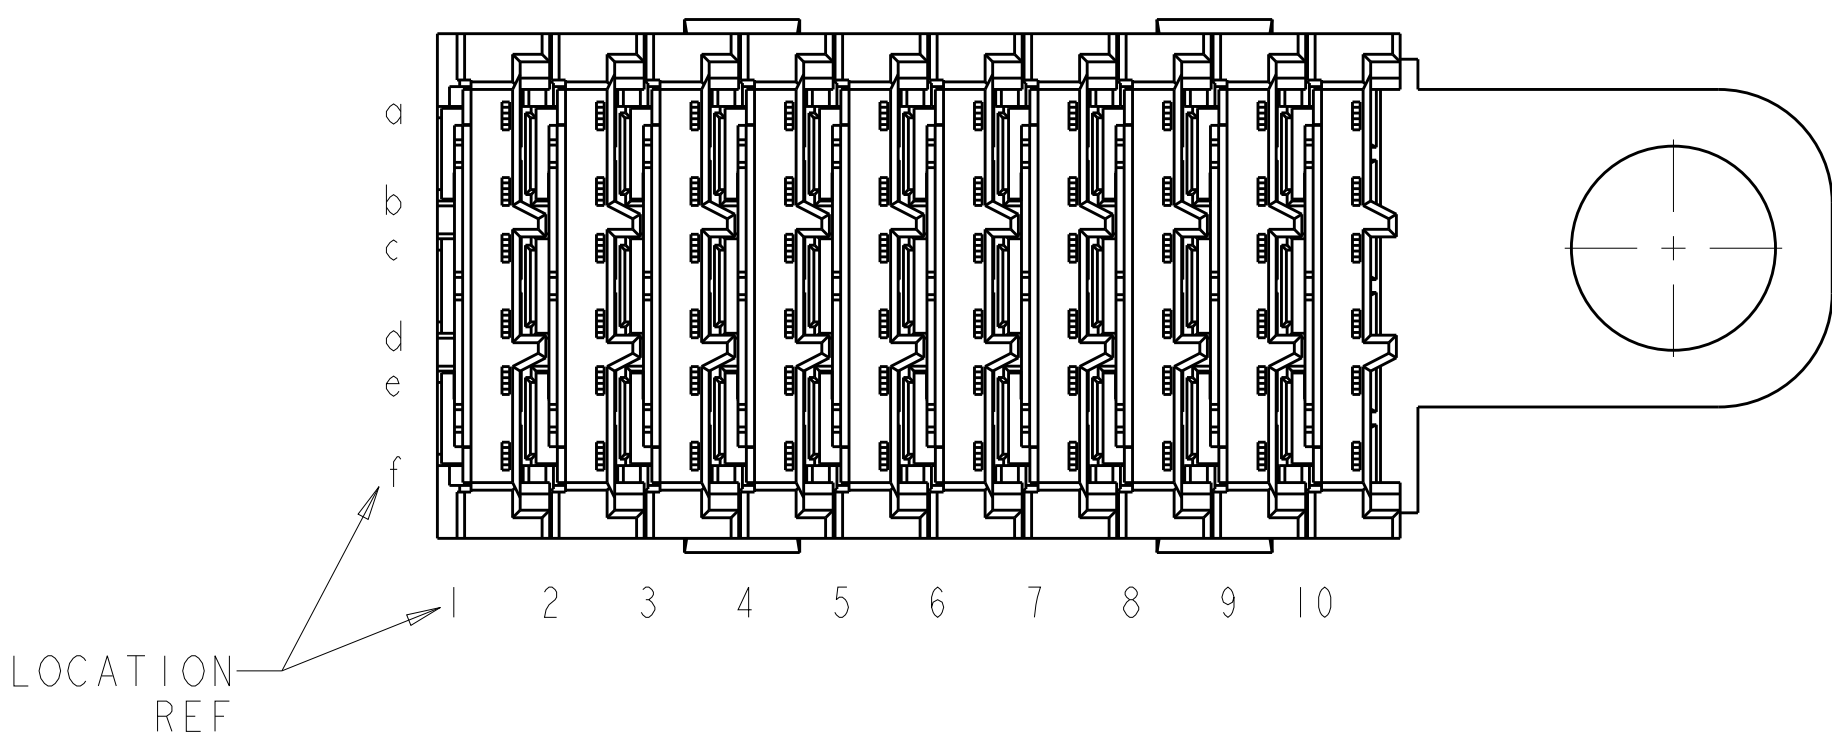

5120949-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 14SEP2004 CHK R. A. PATTERSON 14SEP2004 APVD -		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±" 1 PLC ±" 2 PLC ±0.13 3 PLC ±0.050 4 PLC ±" ANGLES ±1°		NAME RECEPTACLE ASSEMBLY, 6 ROW, 60 POSITION, VERTICAL, W/GUIDE MODULE, Z-PACK HS3	
MATERIAL 3		FINISH SHIELD: 3 CONTACTS: 2		SIZE CAGE CODE DRAWING NO A100779C=5120949	
		PRODUCT SPEC 108-1957 APPLICATION SPEC 114-13020		RESTRICTED TO -	
		WEIGHT -		SCALE 5:1	
		CUSTOMER DRAWING		SHEET 1 OF 1	
				REV A	