


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/17/12	D.N.

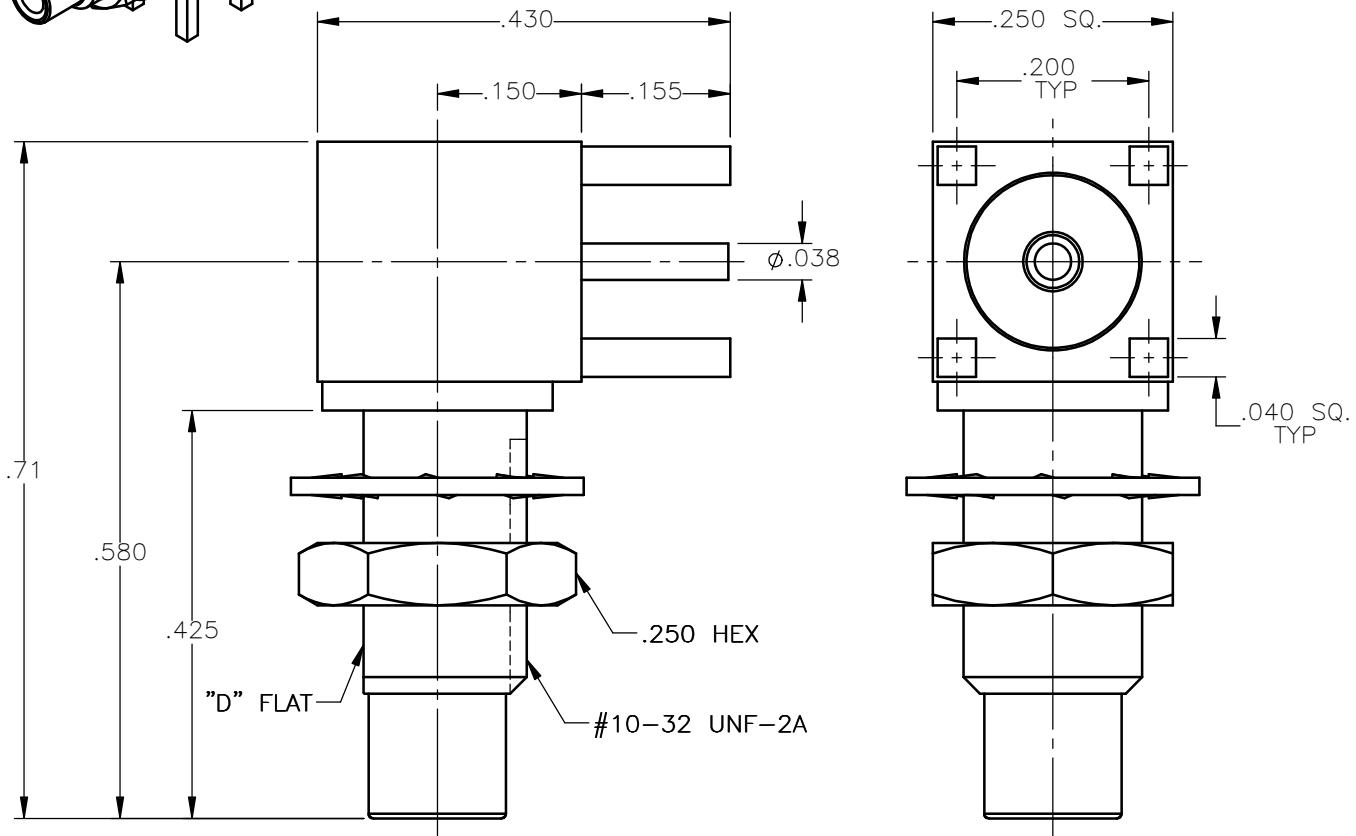

NOTES:

MATERIALS:

1. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
2. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

1110-7511-000

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON

DWN: DATE
D.N. 01/17/12

CHKD: DATE
M.J. 01/17/12

APVD: DATE
J.M. 01/17/12



a RADIALL company

Property of Radiall
This document cannot be reproduced or
communicated to a third party without prior
written permission of RADIALL.



SMC RIGHT ANGLE MALE JACK
BULKHEAD MOUNT
P.C.B. RECEPTACLE

REFERENCE:

ORIGINATED: D.N.
DATE: 01/17/12

MATERIALS & FINISHES:

SEE NOTES

SIZE

A

FSQM NO.

19505

DWG NO.

1110-7511-000

REV

A

SCALE 5:1

THIRD ANGLE
PROJECTION



SHEET 1 OF 1