

MATERIAL:

CONNECTOR - SMT

PLASTIC HOUSING:

LCP, FLAMMABILITY RATING UL94-V0


CONTACT:

PHOSPHOR BRONZE

PLATING: SEE AMPHENOL PART
NUMBER

PACKAGING: TAPE AND REEL (500 PER)

TEMPERATURE RANGE: -40°C TO +85°C

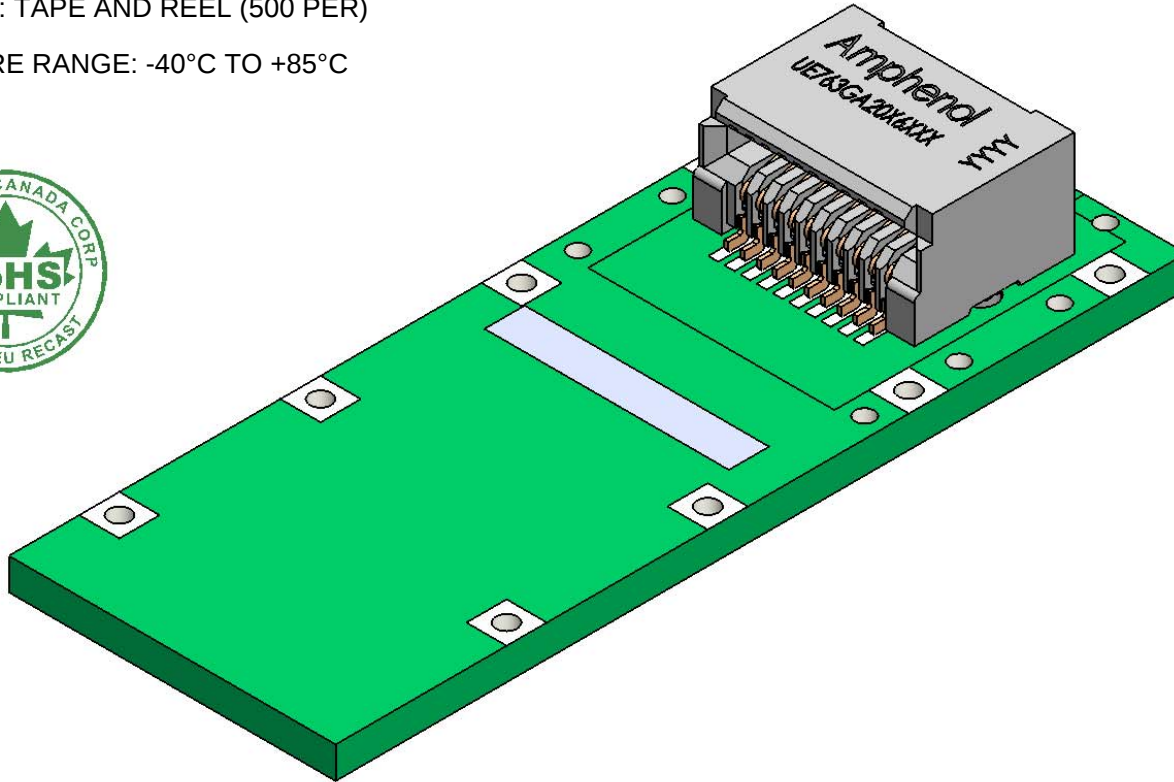

REVISIONS

REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PRELIMINARY	X	
B		PRELIMINARY STAMP REMOVED	OCT24/14	
C		UPDATED	NOV11/14	

AMPHENOL PART NUMBER CONFIGURATION

UE76 - 3GA 20 - X 6 0 0 T

PACKAGING

T = TAPE AND REEL PACKAGING

PLATING

2 = 0.76um GOLD AT MATING AREA
GOLD FLASH IN TERMINATION

3 = 0.76um GOLD AT MATING AREA
3.0-7.62um MATTE TIN IN
TERMINATION

5 = 0.38um GOLD AT MATING AREA
GOLD FLASH IN TERMINATION

6 = 0.38um GOLD AT MATING AREA
3.0-7.62um MATTE TIN IN
TERMINATION



DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
		DRAWN	J.SI	JUL19/13		
DECIMALS	ANGLES	DESIGNED			TITLE 1X1 ULTRAPORT SFP CONNECTOR (25/32G)	
X.X ± 0.25	± 1°	CHECKED				
X.XX ± 0.15		QA APP'D				
MATERIAL AND FINISH		SEE NOTES		IE APP'D		
REF.	X	DWG APP'D			SIZE A4	DWG. NO. P-UE76-3GA20-X600T
CODE IDENT. NO.	03554				SCALE 4:1	PROJECT
						REV. C
						SHEET 1 OF 3

SOME OF ULTRAPORT CAGES PCB LAYOUT NOT ALLOWED HAVING SIGNAL TRACES ON THE TOP OF THE SURFACE. PLEASE CONTACT AMPHENOL HIGH SPEED INTERCONNECTS FOR CAGES AVAILABILITY FOR THE APPLICATIONS.

		REVISIONS		
REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PRELIMINARY	X	
B		PRELIMINARY STAMP REMOVED	OCT24/14	
C		UPDATED	NOV11/14	

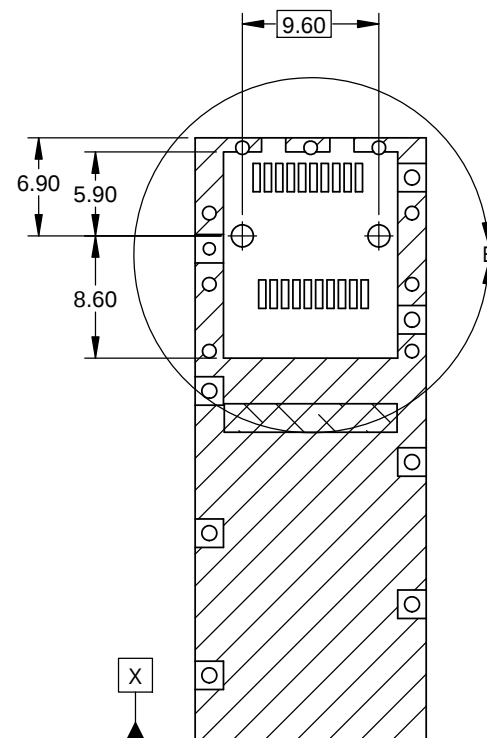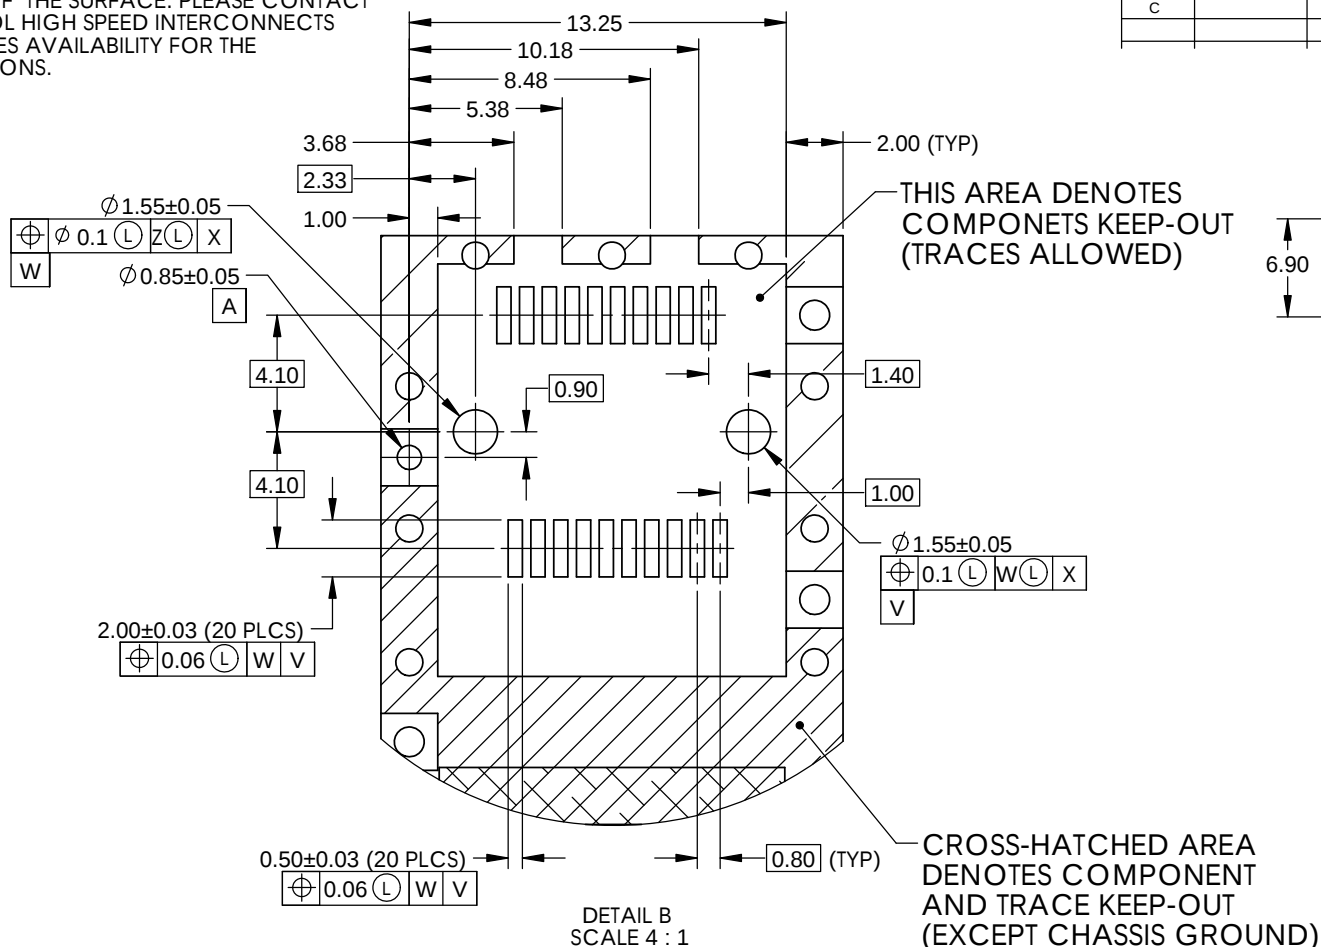

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE		Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com			
DECIMALS ANGLES X.X ± 0.25 ± 1° X.XX ± 0.15		DRAWN J.SI		JUL19/13		TITLE 1X1 ULTRAPORT SFP CONNECTOR (25/32G)			
MATERIAL AND FINISH SEE NOTES		DESIGNED							
		CHECKED							
		QA APPD							
		IE APP'D							
REF. X						SIZE A4	DWG. NO. P-UE76-3GA20-X600T		REV. C
CODE IDENT. NO. 03554		DWG APP'D				SCALE 2:1	PROJECT		SHEET 3 OF 3