

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91829

SWITCH -- BASIC

CATALOG LISTING

V3-101**CKB 0100****M V3-101**DRAWING
NUMBERISSUE
104
17

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO20189

RER
25 MAY 65

B CO21688

M B F
3 OCT 66

C CO24941

M B S
3 DEC 68

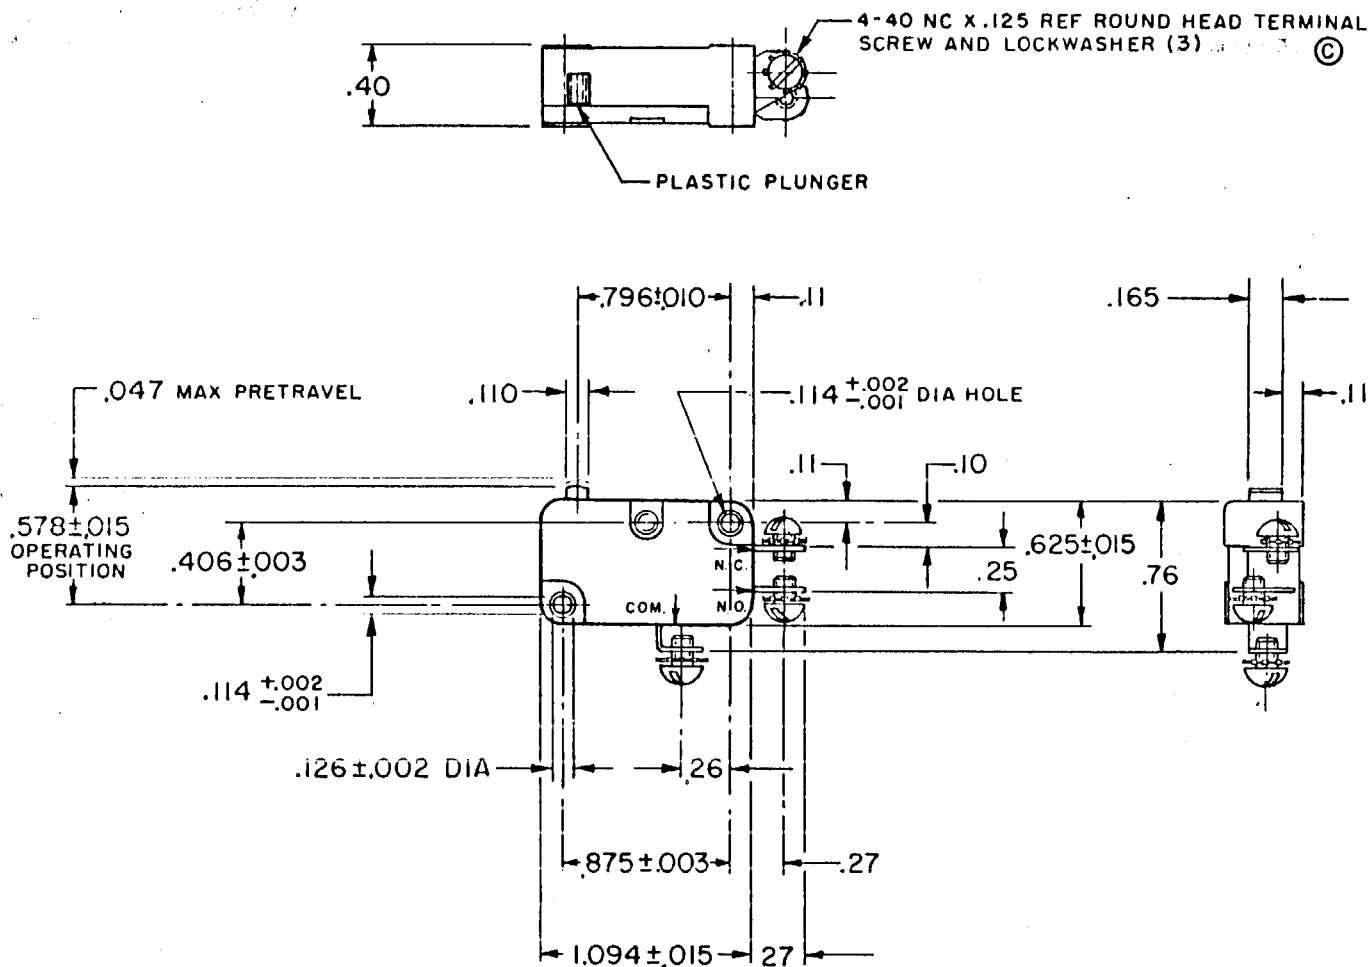
D CO26075

M B S
26 AUG 69

E CO31748

S D
2 APR 73F CO
32395GLH
14 AUG 73G CO
59921SMA
29 SEPT 86

H CO74475

K D R
15 APR 93

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE----- 8 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE----- 2 OZ MIN	11A-1/3HP-125-250-277 VAC - L156 - 1/2A-125 VDC; 1/4A-250 VDC 4A-125 VAC "L"	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL----- .006-.016		ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL----- .040 MIN		WEIGHT .017 LB
FREE POSITION----- .625 MAX		
RELEASE TRAVEL----- .007 MIN		