


DIMENSIONS

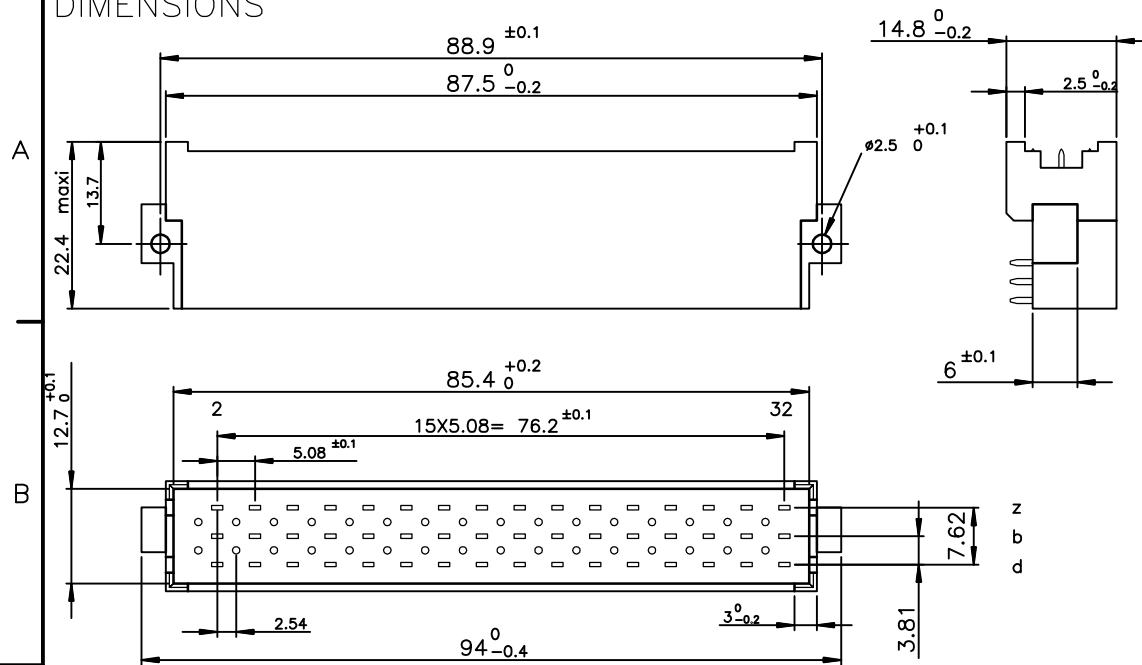

ELECTRICAL DATA

-Current at AMB.	5.5 A at 20° / 4 A at 70°
-Contact resistance	≤15mΩ according to DIN 41640 Teil 4 test 2a
-Insulation resistance	≥10 ⁶ MΩ according to DIN 41640 teil 7 test 3a
-TEST VOLTAGE	according to DIN 41640 teil 21
contact/contact	1550 V
contact/ground	2500 V

MECHANICAL DATA

-Insertion force	≤75N
-Mechanical endurance	500 matings unmatings according to DIN41640 teil 21
-Material insulator	Thermoplastic UL94V1
-Material contacts	Copper alloy
-Finishing contact surface	Gold over nickel Lead Free
-Finishing termination	Lead-Free
-Shock	≤30mΩ according to DIN 41640 Teil 14 test 6c
-Vibration	10-2000Hz/20g according to DIN 41640 Teil 15

ENVIRONMENTAL DATA

-Climatic category	According to DIN 41612 - class 1
-Corrosion	According to DIN 41612 - class 1


ALL CONTACTS ARE IN ADVANCED POSITION
PERFORMANCES AS PER DIN 41612 STYLE F CLASS 1

NOTE RoHS INFORMATION


- The "LF" products meet European Union Directives and other country regulations as described in GS-22-008.
- The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.
- For the right angled versions, like the current leaded versions, it's recommended to use high temperature adhesive or metallic device, to protect the nearest plastic part in contact with of the solder wave, to avoid any visual plastic deterioration.

LEAD-FREE PART-NUMBER
5159009486394AAKLF

TERMINATION

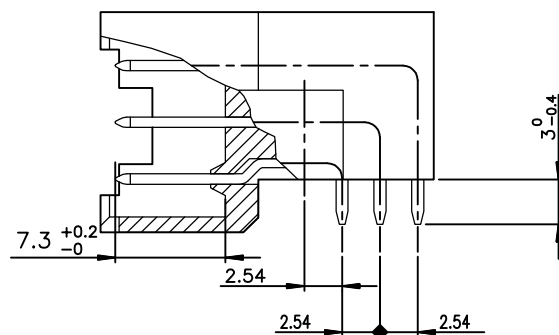

P.C. CARD DRILLING

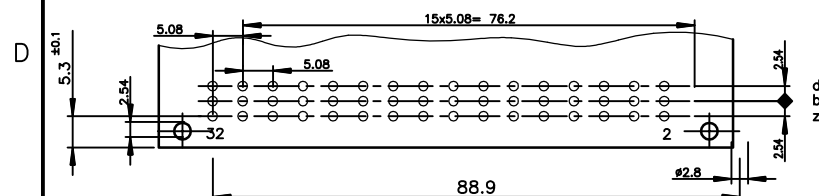

rev	ecn no	dr	date
B	LS06-0022	LGO	2006/02/21
C	LS06-0095	LGO	2006/06/26
D	LS07-0288	LGO	2007/11/19
E	F10-0214	APA	2010/10/01
F	F12-0053	APA	2012/05/07
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3		Scale 1.5
			TOLERANCES UNLESS OTHERWISE SPECIFIED			size A3		Scale 1.5
Dr	PESSON	2006/02/21	ANGULAR	0.X	±0.1	ECN		F12-0053
Eng	PESSON	2006/02/21	LINEAR	0.XX	±0.1	Spec ref		-
Chr	LEGARE	2006/02/21	0.XX ±2	0.XXX	±0.1	Rev.		F
Appr	LEGARE	2006/02/21	Product family		DIN POWER			
			title		dwg no			
			MALE CONNECTOR 3 ROW		C01-5159-0051			
			48 CONTACTS					
			catalog no		CUSTOMER		sheet 1 of 1	