

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1705251207

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 85 Ohm Plus 3 Pair Vertical Backplane Header, Unguided, Open Endwalls, 12 Columns, 108 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free

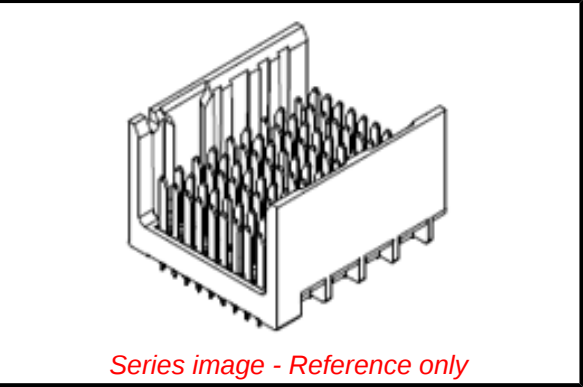

Documents:

Drawing (PDF)

Product Specification PS-170540-999 (PDF)

Application Specification AS-76060-990 (PDF)

Packaging Specification PK-70873-7700 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Backplane Connectors
Series	170525
Application	Conventional
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	887191358963
Physical	
Circuits (Loaded)	108
Circuits (maximum)	108
Color - Resin	Gray
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.267/g
Number of Columns	12
Number of Pairs	3
Number of Rows	9
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.35mm, 1.90mm
Pitch - Termination Interface	1.35mm, 1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per

-ED/79/2015 (17

December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

170525 Series

Mates With

170480 Impact™ 85 Ohm Plus Right Angle

Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description

Product #

Backplane Header

0621009610

Removal Tool for

GbX® U-Series, GbX

I-Trac™, Impact™,

or Z-PACK Tinman*

Impedance	85#	Impact™ Backplane <u>0622018879</u>
Shield Type	N/A	Press-In Tool for
Shielded	No	Impact™ 85 Ohm
Voltage - Maximum	30V AC (RMS)/DC	Vertical Backplane
Solder Process Data		Assembly
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Packaging Specification	PK-70873-7700	
Product Specification	PS-170540-999	
Sales Drawing	SD-170525-0001	
Symbol/Footprint Data	SYM-170525-1207	

This document was generated on 06/10/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION