

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0760605126

Status:


Active

Overview:

Impact™ Backplane Connectors and Cable Assemblies

Description:

Impact™ 100 Ohm 5 Pair Right Angle Daughtercard Receptacle, Right Guided, 16 Columns, 240 Circuits, Plated Through Hole Dimension 0.39mm , Polarization Key A, Lead-Free

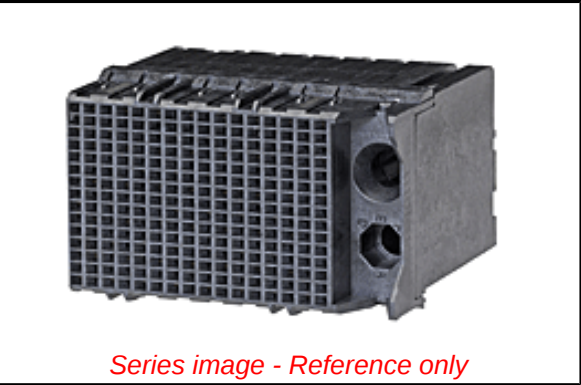

Documents:

3D Model

Application Specification AS-76060-990 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-76060-999 (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76060
Application	Conventional, Daughtercard
Application Tooling Documents	TM-622018799
Component Type	PCB Receptacle
Electrical Model	Yes
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
UPC	883906526214
Physical	
Circuits (Loaded)	150
Circuits (maximum)	150
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	32.482/g
Number of Columns	16
Number of Pairs	5
Number of Rows	15
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014

December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76060 Series

Mates With

76055 Impact™ 100 Ohm Vertical

Backplane Header

Application Tooling | FAQ

Tooling specifications and manuals are

found by selecting the products below.

Crimp Height Specifications are then

contained in the Application Tooling

Specification document.

Global

Description	Product #
Impact™	0621008080
Daughtercard	
Removal Tool	
Daughter Card	0622018659
Module Installation	
Press-In Tool for 5-	

Current - Maximum per Contact	0.75A	Pair by 16-Column Assemblies
Data Rate	25.0 Gbps	
Impedance	100#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Electrical Model Document	EE-76060-003	
Product Specification	PS-76060-999	
S-Parameter Model	SP-76060-003	
Sales Drawing	SD-76060-004	
Symbol/Footprint Data	SYM-76060-5126	

This document was generated on 07/02/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION