

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	MILITARY PART # AND CLASS	STUD SIZE		DIMENSIONS in. [mm]				
		ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
PN14-4R	MS25036-152 CLASS 2	#4	M3	.76 [19,3]	.25 [6,4]	.22 [5,6]	.65 [16,5]	.12 [3,1]
PMN2-3R	-----	--	M3	.85 [21,6]	.23 [5,8]	.20 [5,1]	.65 [16,5]	.13 [3,3]
PN14-6R	MS25036-107 CLASS 2	#6	M3,5	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.15 [3,8]
PN14-6RN	MS25036-106 CLASS 2	#6	M3,5	.76 [19,3]	.25 [6,4]	.22 [5,6]	.65 [16,5]	.15 [3,8]
PN14-8R	MS25036-153 CLASS 2	#8	M4	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.17 [4,3]
PN14-10R	MS25036-108 CLASS 2	#10	--	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PMN2-5R	-----	--	M5	.97 [24,6]	.35 [8,9]	.26 [6,5]	.71 [18,0]	.21 [5,3]
PN14-14R	MS25036-154 CLASS 2	1/4"	M6	1.06 [26,9]	.44 [11,2]	.38 [9,7]	.83 [21,1]	.27 [6,9]

NOTES:

1. USED FOR:

- A. #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
 B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 C. 600 V. MAX. VOLTAGE RATING

2. INSTALLATION TOOLS:

- A. PRESSES: CP-861, CP-862, CP-871
 B. APPLICATOR: CA-800EZ, CA9
 C. DIE INSERTS: CD-800-2, CD9-2A, CD9-2B


3. WIRE STRIP LENGTH: 1/4" ^{+1/32}₋₀ [6,4^{+0,8}₋₀]

4. MATERIAL:

- A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 B. HOUSING: NYLON, BLUE
 C. SLEEVE: BRASS, TIN PLATED

5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

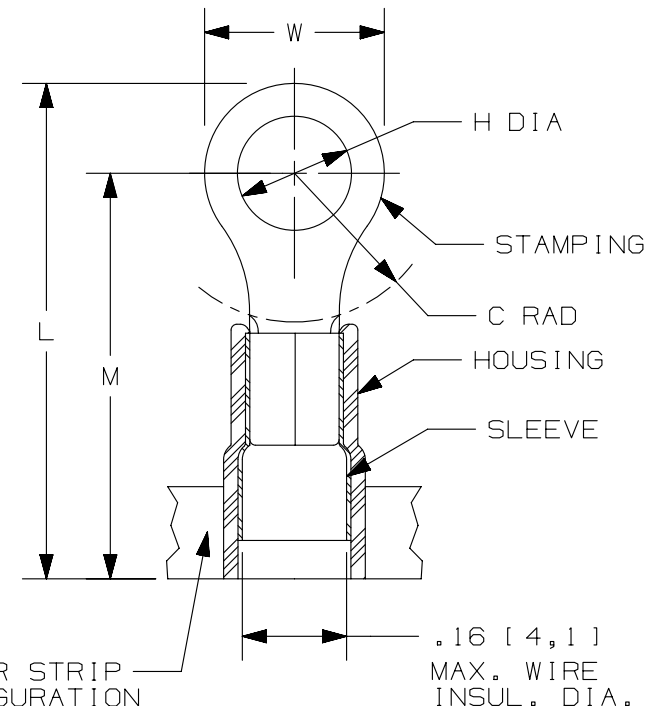


CARRIER STRIP
(CONFIGURATION
MAY VARY)




LISTED
587H
E52164



CERTIFIED
LR31212



									TITLE				
									RING TERMINALS, 3 PC. NYLON INSULATED, #16-14				
									CUSTOMER DRAWING				
									ITEM REVISION NAME		PANDUIT		
									N41099BA/07				
									DATASET FILE NAME		MATERIAL: SEE NOTES		
									N41099BA_DC/07A				
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.13] .xx ± .01 [.25] ANGLES ± 5 °				
									 THIRD ANGLE PROJECTION		DRAWING NUMBER: A41099		
07	09.12.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.		A41099						
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
								JMV	-	LA	N.T.S.		A