

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0525592034

Status:


Active

Overview:

FFC-FPC (SMT)

Description:

Easy-On™ Type FFC/FPC Connector, Vertical, Surface Mount, ZIF, 20 Circuits

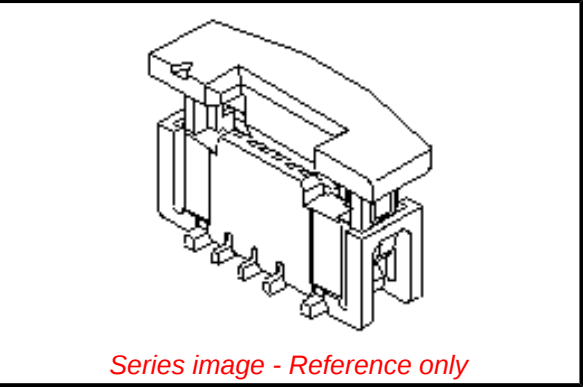

Documents:	
3D Model	Packaging Specification SPK-52559-004 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-52559-019 (PDF)	

Agency Certification	
UL	E29179
General	
Product Family	FFC/FPC Connectors
Series	52559
Overview	FFC-FPC (SMT)
Product Name	Easy-On™
UPC	887191347356
Physical	
Circuits (Loaded)	20
Color - Resin	Natural
Contact Position	N/A
Durability (mating cycles max)	20
Entry Angle	Vertical
Flammability	94V-0
Mated Height	3.90mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Silver, Tin-Bismuth
Material - Plating Termination	Silver, Tin-Bismuth
Material - Resin	Nylon
Net Weight	272.922/mg
Number of Rows	1
Orientation	Vertical
PC Tail Length	2.00mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FFC/FPC
Electrical	
Current - Maximum per Contact	0.5A
Voltage - Maximum	50V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-52559-004
Product Specification	PS-52559-019
Sales Drawing	SD-52559-057, SD-52559-059

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -ED/79/2015 (17 December 2015)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

52559 Series

Mates With

Molex Premo-Flex FFC. Be sure to match like plating

This document was generated on 05/17/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION