

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1705301020](#)
Status: **Active**
Overview: [Impact™ Backplane Connector and Cable Assembly System](#)
Description: [Impact™ 85 Ohm Plus 3 Pair Right Angle Daughtercard, Unguided, 10 Columns, 90 Circuits, Plated Through Hole Dimension 0.39mm, Lead Free](#)

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-170540-999 \(PDF\)](#)
[Application Specification AS-76060-990 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


UL E29179

General

Product Family Backplane Connectors
Series [170530](#)
Application Conventional, Coplanar, Daughtercard
Application Tooling Documents TM-622018799
Component Type PCB Receptacle
Overview [Impact™ Backplane Connector and Cable Assembly System](#)
Product Name Impact™
UPC 884982613416

Physical

Circuits (Loaded) 90
Circuits (maximum) 90
Color - Resin Gray
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part None
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 9.185/g
Number of Columns 10
Number of Pairs 3
Number of Rows 9
Orientation Right Angle
PC Tail Length 1.20mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.00mm
Packaging Type Tray
Pitch - Mating Interface 1.35mm, 1.90mm
Pitch - Termination Interface 1.35mm, 1.90mm
Plating min - Mating 0.762µm
Polarized to PCB No
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +85°C
Termination Interface: Style Through Hole - Compliant Pin

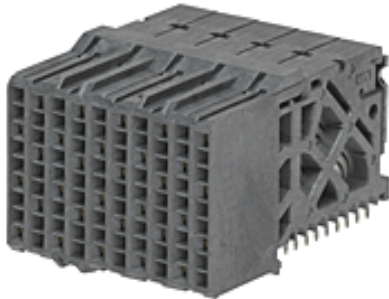

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per
-ED/79/2015 (17
December 2015)

Halogen-Free

Status

Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

[170530](#) Series

Mates With

[170525](#) Impact™ 85 Ohm Plus Vertical
Header

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description

Product #

Daughter Card [0622018646](#)
Module Installation
Press-In Tool for 3-
Pair by 10-Column
Assemblies

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	85#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990
Electrical Model Document	EE-170530-025, EE-170530-040
Product Specification	PS-170540-999
S-Parameter Model	SP-170530-0001, SP-170530-0001_40G
Sales Drawing	SD-170530-0001
Symbol/Footprint Data	SYM-170530-1020

Impact Daughter	0622024300
Card Extraction Tool	
Impact™ Daughter	0622024600
Card Module	
Removal Tool	

This document was generated on 03/30/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION