

Description

- Ceramic package with a hermetically seam sealed metal lid suitable for automotive applications. Qualified to AEC-Q200 and with TS16949 release.
- Model IQXC-42 AUTO
- Model Issue number 1

Frequency Parameters

- Frequency 40.0MHz
- Frequency Tolerance $\pm 10.00\text{ppm}$
- Tolerance Condition @ 25°C
- Frequency Stability $\pm 100.00\text{ppm}$
- Operating Temperature Range -40.00 to 125.00°C
- Overtone Order Fundamental
- Ageing $\pm 5\text{ppm}$ max per year @ 25°C

Electrical Parameters

- Load Capacitance (CL) 10.00pF
- Shunt Capacitance (C0) 3pF max
- Drive Level 100μW max
- ESR 60.00Ω max

Environmental Parameters

- Storage Temperature Range: -55 to 150°C
- Qualified to AEC-Q200

Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details


- Pack Style: Cutt In tape, cut from a reel
- Pack Size: 1
- *Alternative packing option available*

Technical Notes

- Released to AEC-Q200

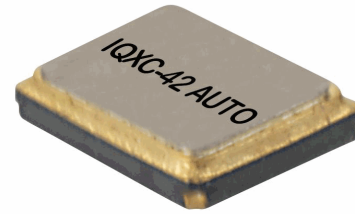

Outline (mm)

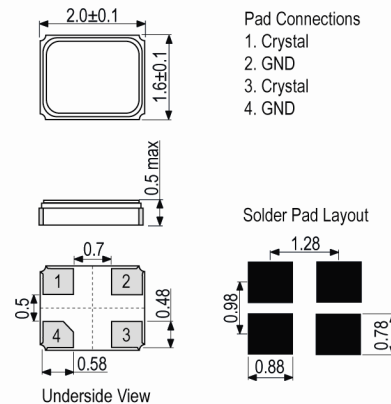

Pad Connections
1. Crystal
2. GND
3. Crystal
4. GND

Solder Pad Layout

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com