

Common Mode Choke For ADSL and VDSL



- Common Mode Chokes for use in ADSL and VDSL applications
- Ideal for high frequency DSL applications

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C



RoHS-5 Compliant Part Number	RoHS-6 Compliant Part Number	Turns Ratio	Inductance (each winding) (mH)	Isolation Voltage (Vrms)
BX8213	BX8213NL	1:1	9.0	500

Notes: Parts are shipped in trays unless Tape & Reel packaging is specified by adding the suffix "T" to the part number (i.e. BX8213T).



Mechanical

Schematic

BX8213 / BX8213NL

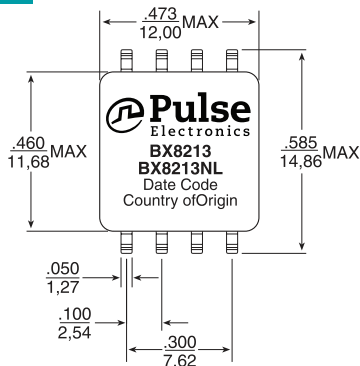

SUGGESTED PAD LAYOUT

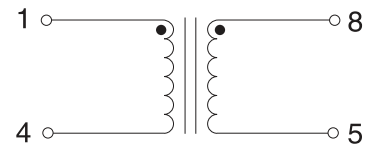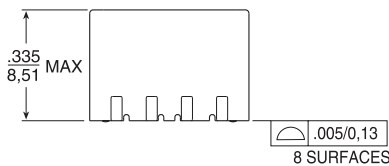

Weight2.0 grams
Tape & Reel250/reel
Tube40/tray
Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6287 8998

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.