


HONEYWELL PART NUMBER
77050

REV	DOCUMENT	CHANGED BY		CHECK
D	0068753	VKK	03SEP10	CMH

HONEYWELL PART NUMBER, PRESSURE
SETTING AND DATE CODE

MATES WITH PACKARD CONNECTOR
#12034147

CUSTOMER: _____
 APPROVED BY: _____
 DATE: _____
 CUSTOMER
 PART NO.: _____

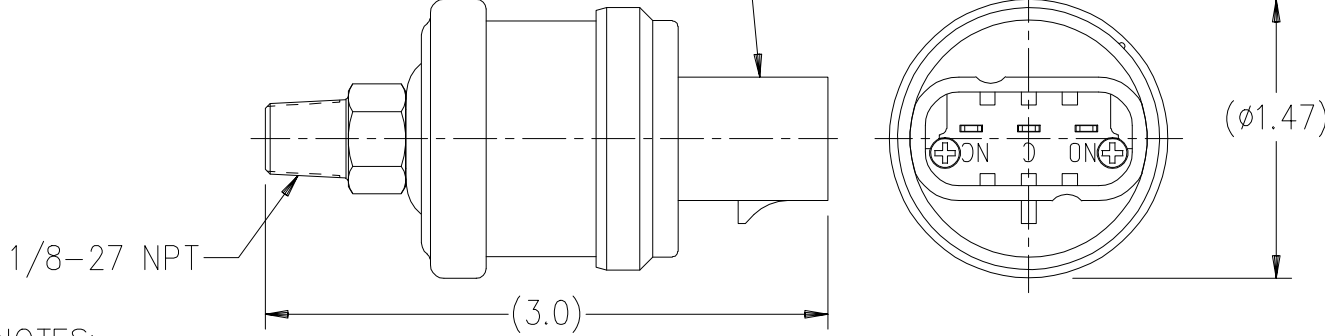

NOTES:

- DUAL CIRCUIT PRESSURE SWITCH.
- NORMALLY CLOSED CIRCUIT TO OPEN AT 25 - 46 PSI.
- SWITCH MAY BE ADJUSTED SO THAT:
 - N.C. CIRCUIT OPENS BEFORE N.O. CIRCUIT CLOSSES.
 - N.C. AND N.O. CIRCUIT HAVE SAME SET POINT.
 - N.O. CIRCUIT CLOSSES BEFORE N.C. CIRCUIT OPENS.
 ORDER MUST SPECIFY TYPE OF SWITCH AND SET POINT FOR EACH CIRCUIT.
- SWITCH IS FURNISHED WITH STEEL BASE ASSY. (.500 HEX) AS A STANDARD UNLESS BRASS BASE ASSY. (.437 HEX) IS SPECIFIED AS AN OPTION BY CUSTOMER ADDING SUFFIX "B" TO THE HONEYWELL PART NUMBER ON THE PURCHASE ORDER, e.g. XXXXXB.
- DIMENSIONS ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PRINT

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACES	X	±	-
ONE PLACE	.X	±	.020
TWO PLACE	.XX	±	.010
THREE PLACE	.XXX	±	.005
FOUR PLACE	.XXXX	±	.0005
ANGLES	X	±	0°30'

DRAWN	D MCGEE	24OCT01
CHECK	-	-

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

AUTOCAD 2D

Honeywell				
PRESSURE SWITCH D.C. (BOTH CIRCUITS ADJUSTABLE) METRI-PACK 5000 SERIES SWITCH				
SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
A	I	-	77050	D
SCALE	NONE	SHEET		1 OF 1

