



LOC		DIST		REVISIONS			
CM	0	P	LYR	DESCRIPTION	DATE	DWN	APVD
		B2		REVISED PER ECR 12-001158	19JAN12	JR	TM


- ① MATERIAL: NYLON, UL94V-0, COLOR- (SEE TABLE).
- ② LAST CIRCUIT IDENTIFIER LOCATED IN APPROX AREA SHOWN.
- ③ CIRCUIT 1 ID LOCATED IN APPROX AREA SHOWN.
- ④ THE TWO END CAVITIES ARE ENLARGED TO ALLOW INSERTION OF 18 AWG RECEPTACLE CONTACT. FOR 2 CIRCUIT HOUSINGS THESE CAVITIES WILL BE ROTATED 90° FROM SHOWN POSITION AND 180° WITH RESPECT TO EACH OTHER. FOR 5 AND 6 CIRCUIT HOUSINGS CIRCUIT 3 IS ALSO ENLARGED TO ALLOW INSERTION OF 18 AWG RECEPTACLE CONTACT.
- ⑤ FOR WIRE INSULATION 2.80 MAX OD
- ⑥ FOR WIRE INSULATION 1.90 MAX OD

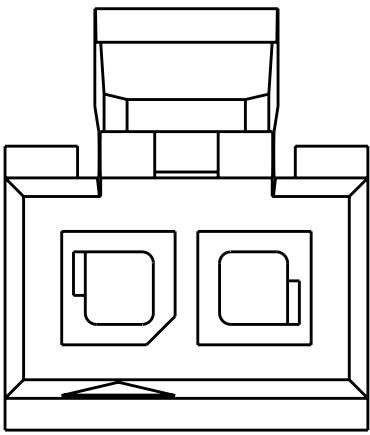


2 CIRCUIT

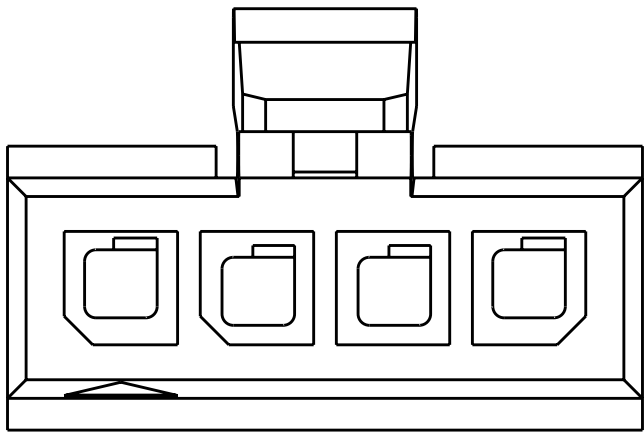

4 CIRCUIT

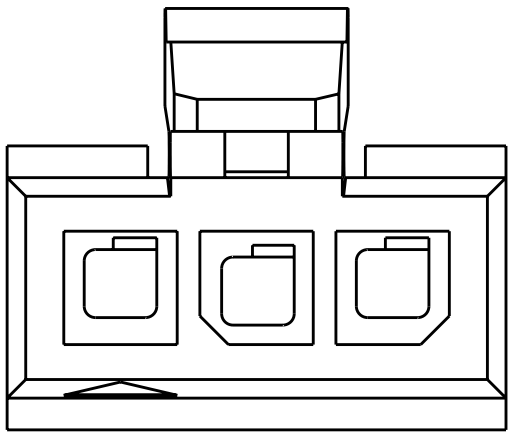

3 CIRCUIT







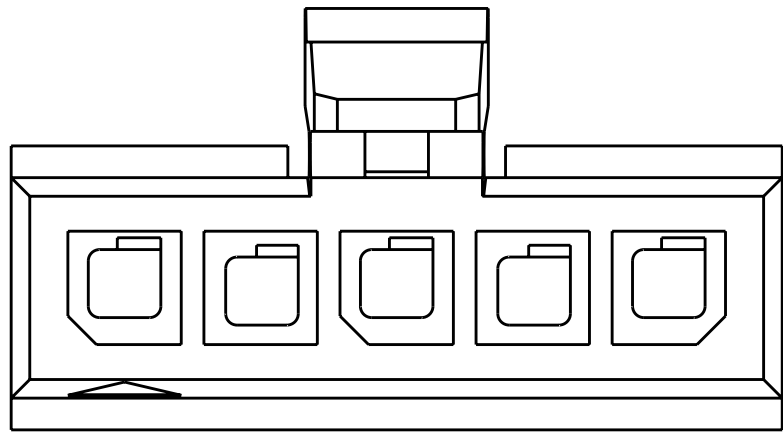


5 CIRCUIT

KEYING CONFIGURATIONS
SCALE 6:1

868.4	20.00	6	NATURAL	I-2008571-6
665.41	17.00	5	NATURAL	I-2008571-5
557.63	14.00	4	NATURAL	I-2008571-4
451.11	11.00	3	NATURAL	I-2008571-3
344.6	8.00	2	NATURAL	I-2008571-2
868.4	20.00	6	BLACK	2008571-6
665.41	17.00	5	BLACK	2008571-5
557.63	14.00	4	BLACK	2008571-4
451.11	11.00	3	BLACK	2008571-3
344.6	8.00	2	BLACK	2008571-2
VOLUME mm ³	DIM L	NO. OF POS.	COLOR	PART NUMBER

TYP. IS DRAWN TO 1:20 UNLESS OTHERWISE SPECIFIED. TYP. IS DRAWN TO 1:20 UNLESS OTHERWISE SPECIFIED. TYP. IS DRAWN TO 1:20 UNLESS OTHERWISE SPECIFIED.		DWN R. BROWN 18MAR2008	Tyco Electronics Harrisburg, PA 17105-3608	
CHK M. MCCARTHY 18MAR2008		APVD M. MCCARTHY 18MAR2008	NAME RECEPTACLE HOUSING, 2 TO 6 POSN, SINGLE ROW, MICRO MATE-N-LOK(TM), TOP LATCH, 18 AWG	
DIMENSIONS: mm		PRODUCT SPEC	SIZE A100779	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±.5 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.13 4 PLC ±.5 ANGLES ±.5 FINISH -		APPLICATION SPEC	CAGE CODE C=2008571	
MATERIAL -		WEIGHT -	DRAWING NO. A100779	
CUSTOMER DRAWING		SCALE 8:1	SHEET 1	REV B2

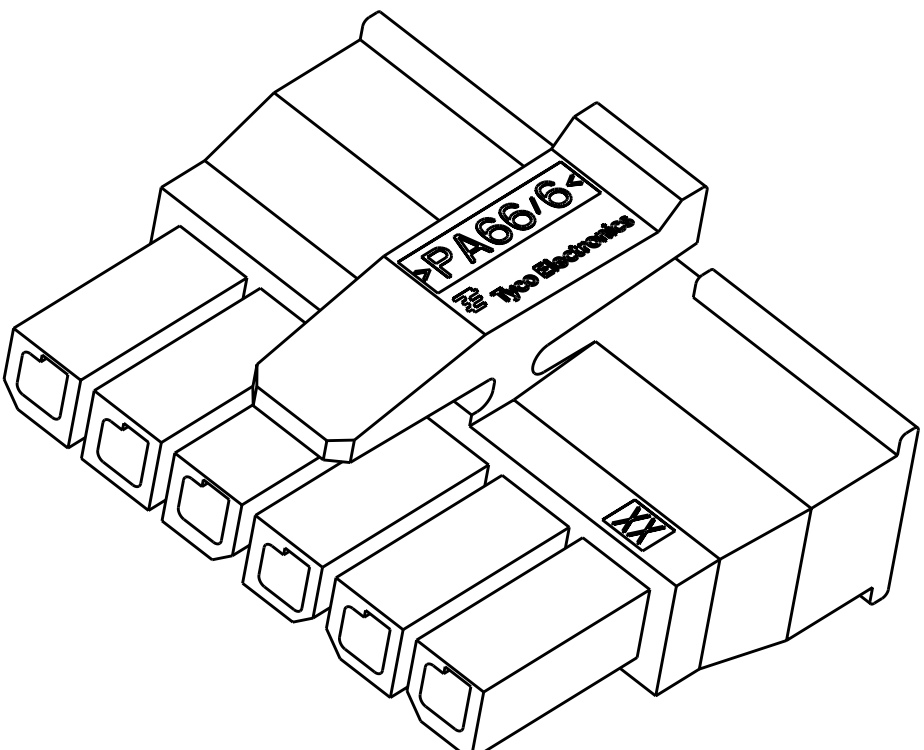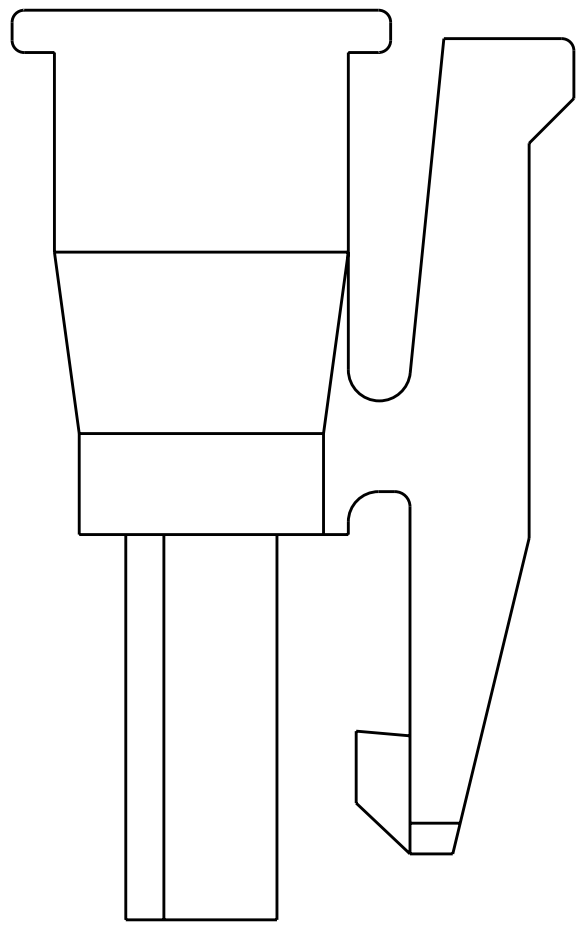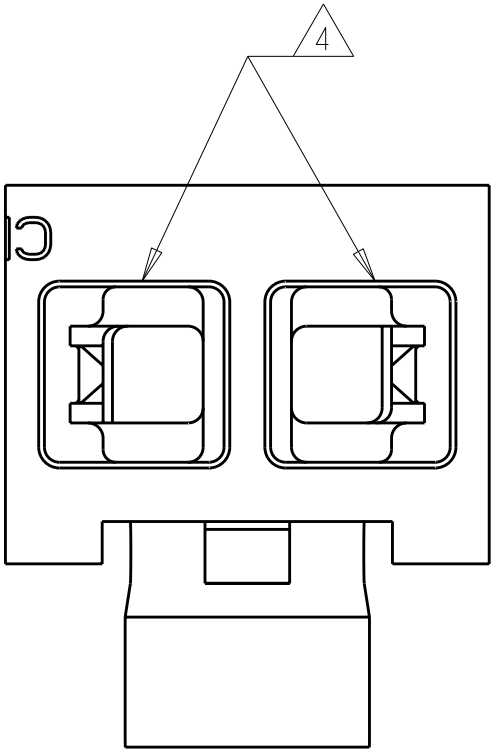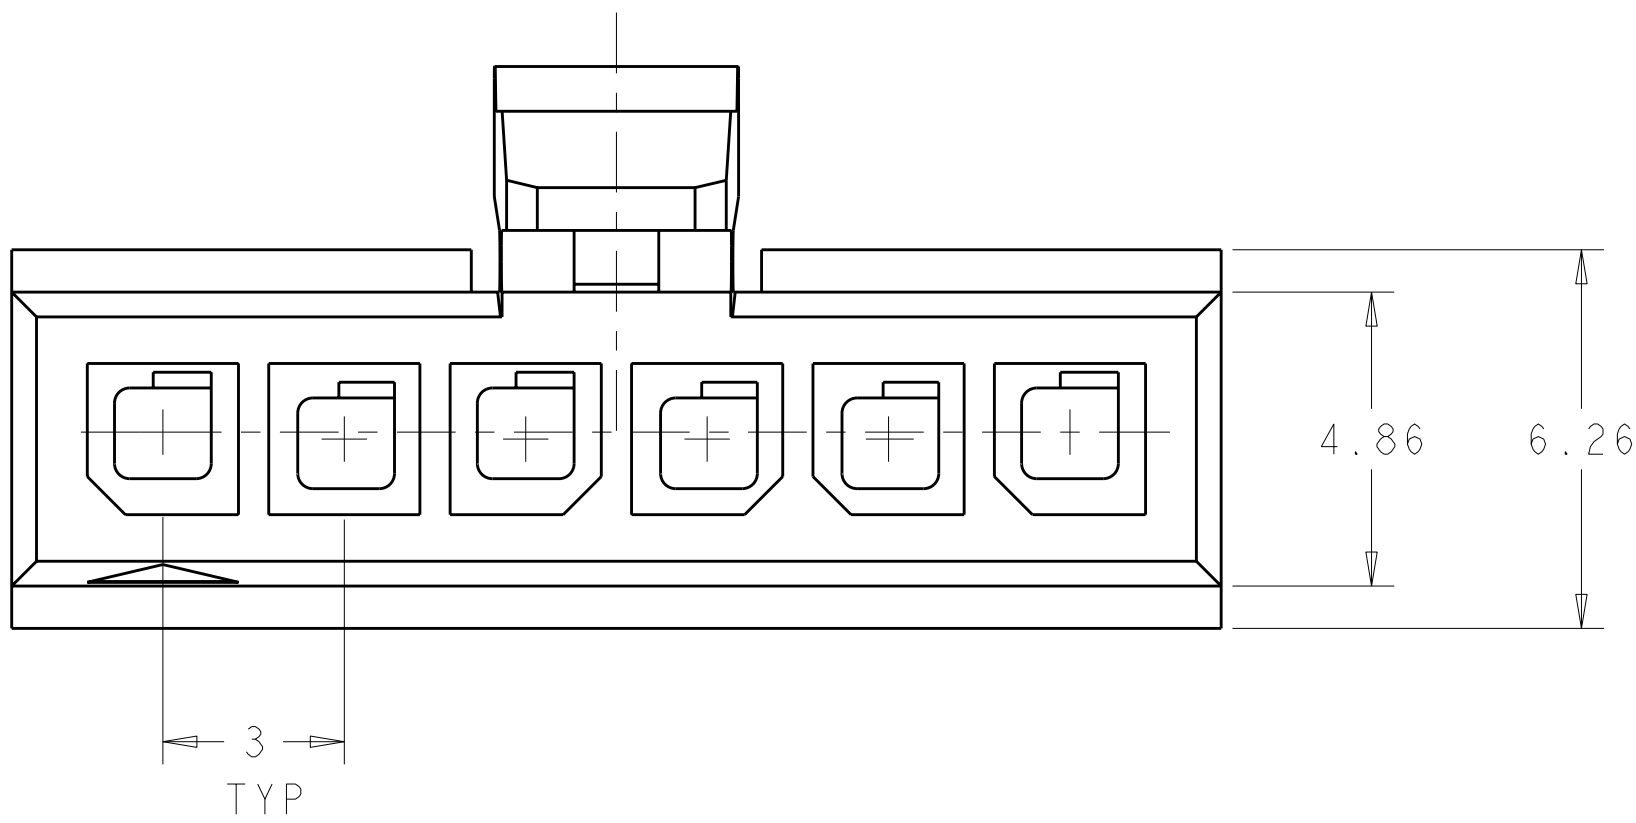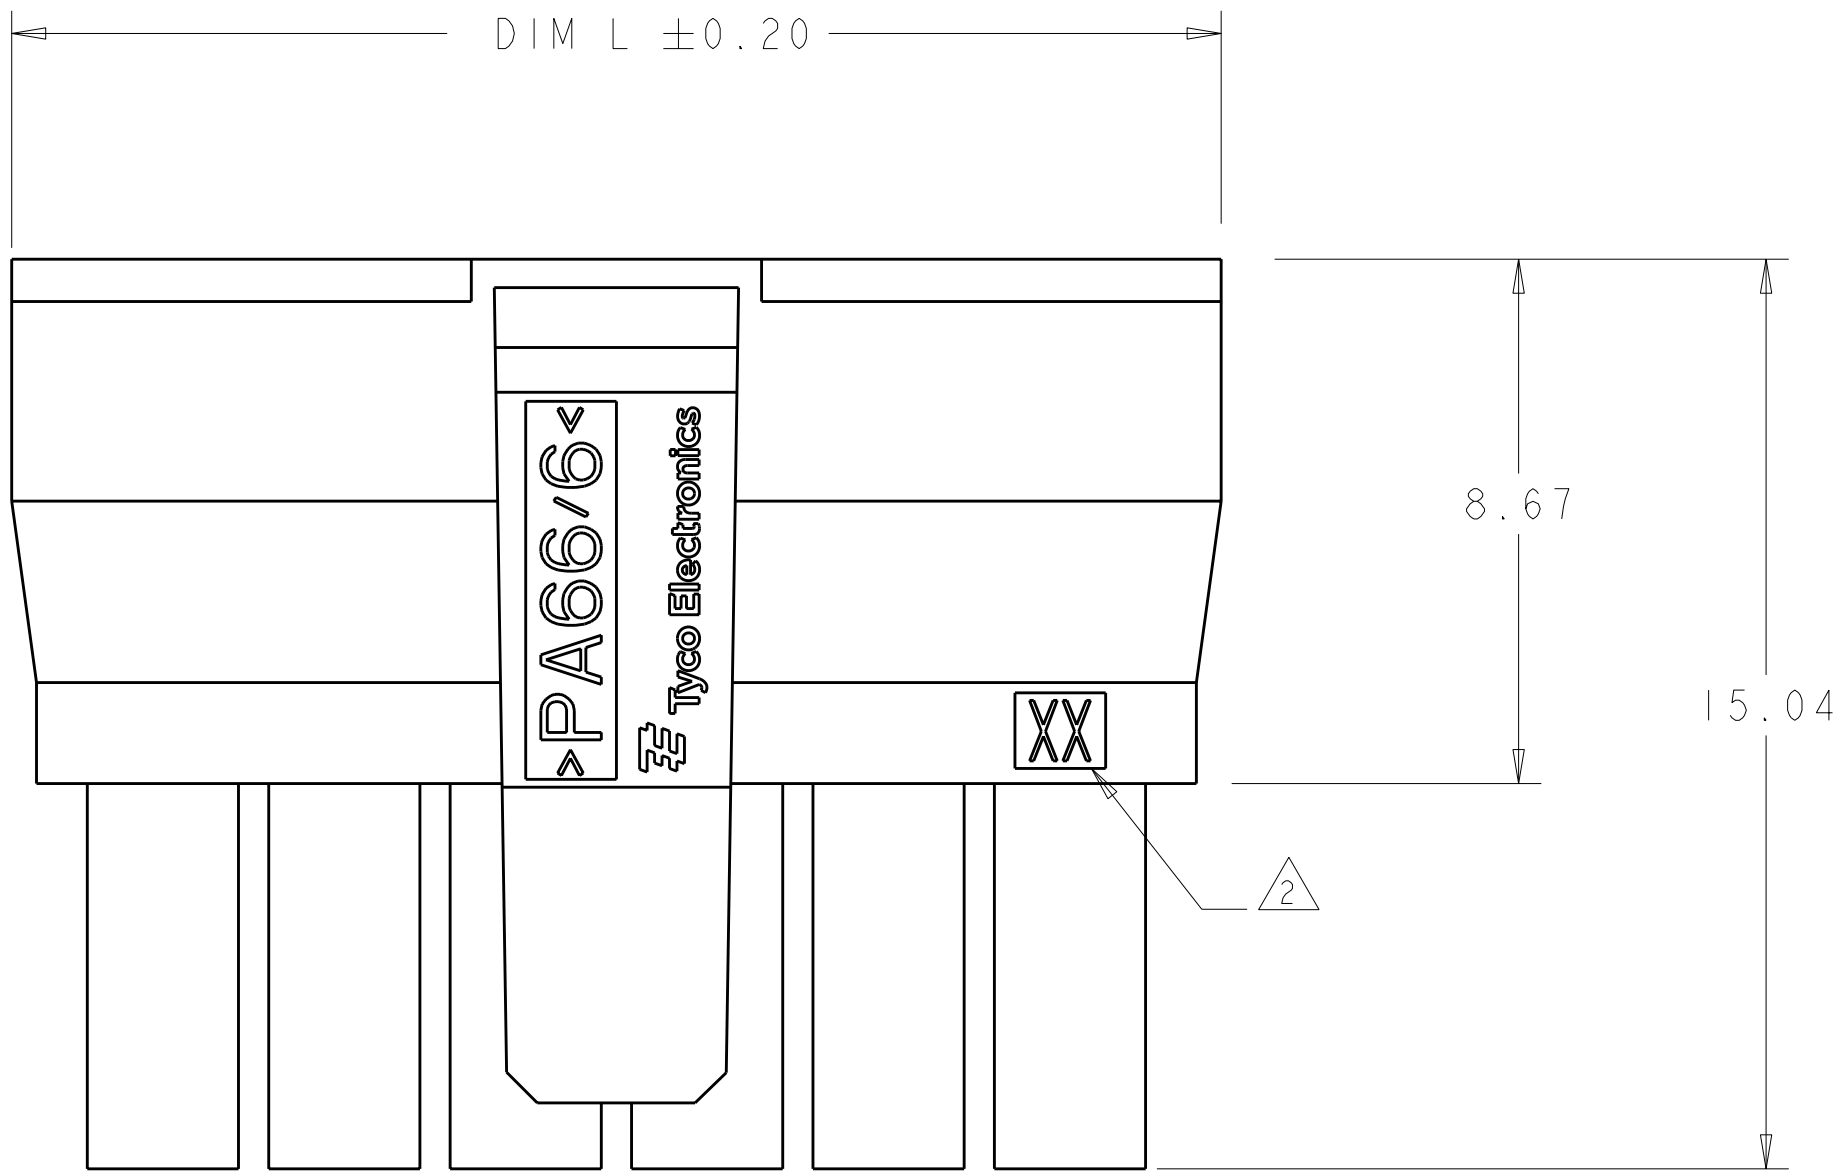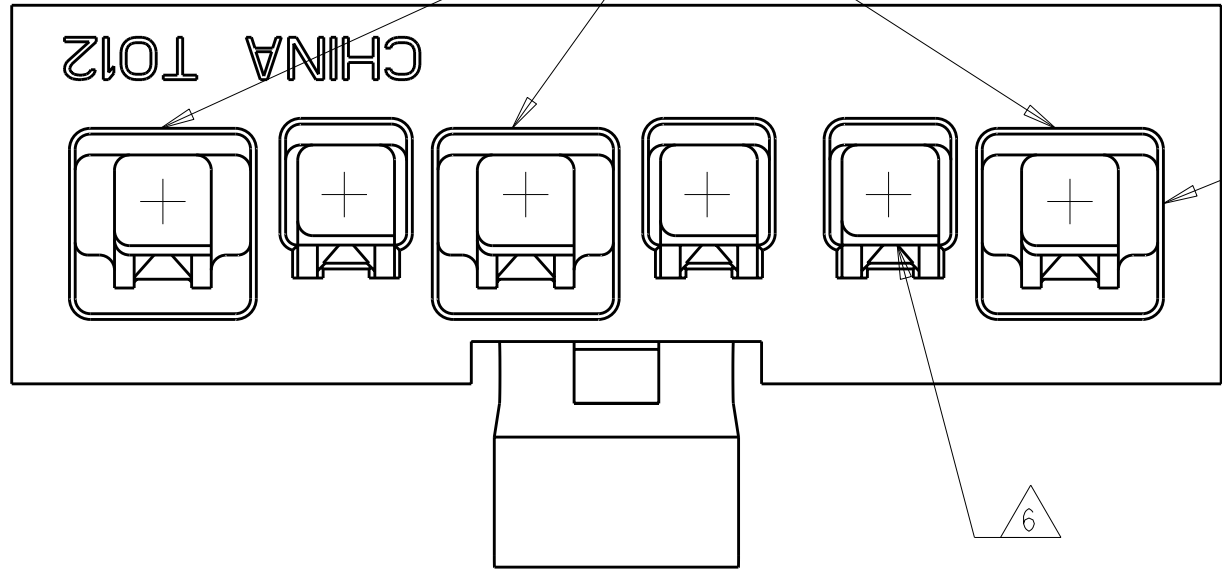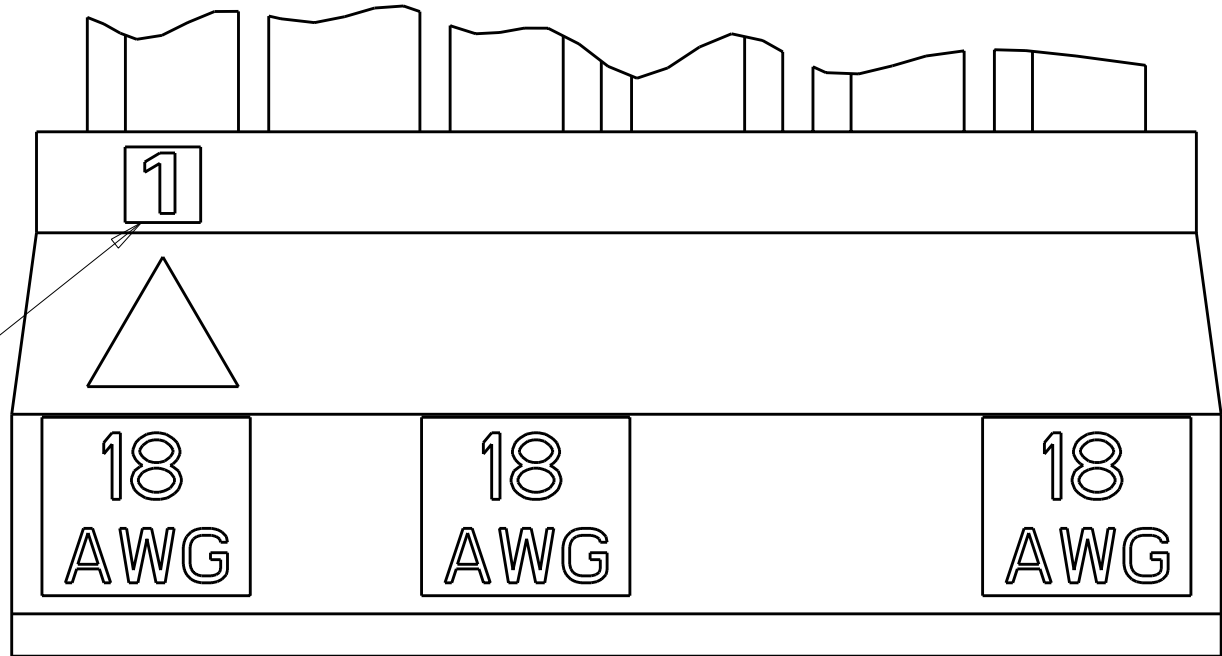

SCALE 5:1

