


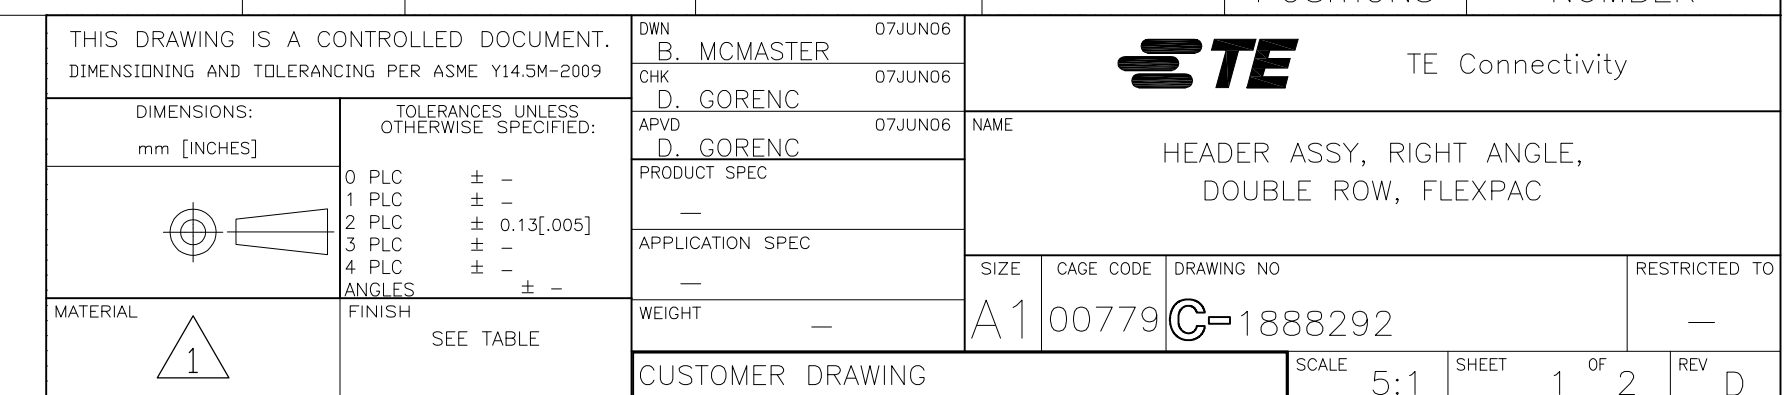

1 MATERIAL:
HOUSING: NYLON, 94V-0 RATED, COLOR: BLUE.
CONTACTS: PHOSPHOR BRONZE

2 FINISH:
CONTACTS: 0.76μm [.000030] MIN GOLD IN MATING AREA .00254 [.000100]
MIN TIN ON SOLDER POST, ALL OVER 1.27μm [.000050] MIN NICKEL.

3 FINISH:
CONTACTS: 2.54μm [.000100] MIN TIN OVER 1.27μm [.000050]
MIN NICKEL.

4 DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER.

5 FINISH:
CONTACTS: 0.76μm [.000030] MIN GOLD IN MATING AREA, 2.54μm [.000100]
MIN TIN FOR A LENGTH OF .200 MIN FROM END OF SOLDER POST, GOLD FLASH
ON REMAINDER, ALL OVER 1.27μm [.000050] MIN NICKEL.

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

GP

00

REV

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

$\frac{\Delta}{5}$	17.78[.700]	7	20.73[.816]	22.86[.900]	1.27[.050]	16	6-1888292-0
$\frac{\Delta}{3}$	78.74[3.100]	31	81.69[3.216]	83.82[3.300]	1.27[.050]	64	5-1888292-8
$\frac{\Delta}{2}$	78.74[3.100]	31	81.69[3.216]	83.82[3.300]	1.27[.050]	64	5-1888292-7
$\frac{\Delta}{3}$	76.20[3.000]	30	79.15[3.116]	81.28[3.200]	0.00[.000]	62	5-1888292-6
$\frac{\Delta}{2}$	76.20[3.000]	30	79.15[3.116]	81.28[3.200]	0.00[.000]	62	5-1888292-5
$\frac{\Delta}{3}$	73.66[2.900]	29	76.61[3.016]	78.74[3.100]	1.27[.050]	60	5-1888292-4
$\frac{\Delta}{2}$	73.66[2.900]	29	76.61[3.016]	78.74[3.100]	1.27[.050]	60	5-1888292-3
$\frac{\Delta}{3}$	71.12[2.800]	28	74.07[2.916]	76.20[3.000]	0.00[.000]	58	5-1888292-2
$\frac{\Delta}{2}$	71.12[2.800]	28	74.07[2.916]	76.20[3.000]	0.00[.000]	58	5-1888292-1
$\frac{\Delta}{3}$	68.58[2.700]	27	71.53[2.816]	73.66[2.900]	1.27[.050]	56	5-1888292-0
$\frac{\Delta}{2}$	68.58[2.700]	27	71.53[2.816]	73.66[2.900]	1.27[.050]	56	4-1888292-9
$\frac{\Delta}{3}$	66.04[2.600]	26	68.99[2.716]	71.12[2.800]	0.00[.000]	54	4-1888292-8
$\frac{\Delta}{2}$	66.04[2.600]	26	68.99[2.716]	71.12[2.800]	0.00[.000]	54	4-1888292-7
$\frac{\Delta}{3}$	63.50[2.500]	25	66.45[2.616]	68.58[2.700]	1.27[.050]	52	4-1888292-6
$\frac{\Delta}{2}$	63.50[2.500]	25	66.45[2.616]	68.58[2.700]	1.27[.050]	52	4-1888292-5
$\frac{\Delta}{3}$	60.96[2.400]	24	63.91[2.516]	66.04[2.600]	0.00[.000]	50	4-1888292-4
$\frac{\Delta}{2}$	60.96[2.400]	24	63.91[2.516]	66.04[2.600]	0.00[.000]	50	4-1888292-3
$\frac{\Delta}{3}$	58.42[2.300]	23	61.37[2.416]	63.50[2.500]	1.27[.050]	48	4-1888292-2
$\frac{\Delta}{2}$	58.42[2.300]	23	61.37[2.416]	63.50[2.500]	1.27[.050]	48	4-1888292-1
FINISH	DIM Z	DIM Y	DIM X	DIM W	DIM V	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D MCMMASTER	07JUN06	TE Connectivity							
DIMENSIONS: mm [INCHES]		CHK D GORENC	07JUN06	NAME							
		APVD D GORENC	07JUN06	PRODUCT SPEC							
		APPLICATION SPEC									
		RESTRICTED TO									
MATERIAL		WEIGHT		A100779C=1888292							
CUSTOMER DRAWING				SCALE	5:1	SHEET	2	OF	2	REV	D

4805 (3/11)