




Flyback Transformer

For Maxim MAX5941A
PoE Interface/PWM Controller

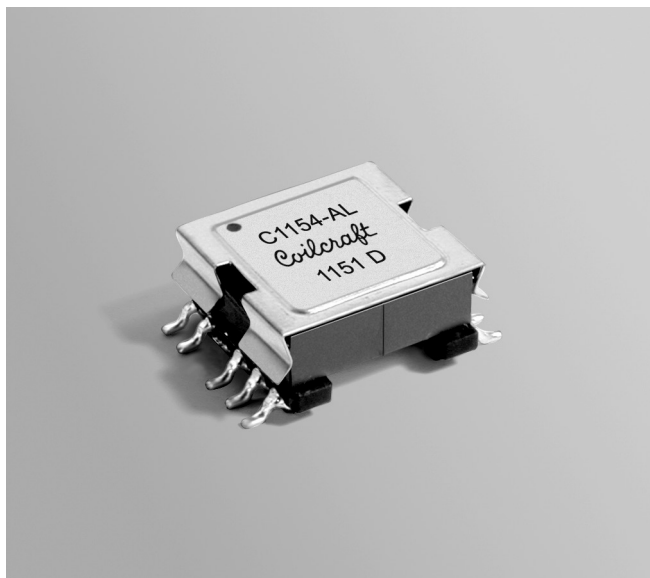

- Dual-output continuous-current flyback transformer
- Operates with 18–72 Volts input
- 1500 Vrms, one minute isolation between the primary and the secondary

Core material Ferrite

Terminations RoHS tin-silver (96.5/3.5) over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 4.9 g

Ambient temperature –40°C to +125°C

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 200 per 13" reel Plastic tape: 44 mm wide, 0.35 mm thick, 28 mm pocket spacing, 9.6 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Inductance at 0A ² ±10%(μH)	Inductance at Ipk ³ min (μH)	DCR max (Ohms)					Leakage inductance ⁴ max (μH)	Turns ratio	Ipk ³ (A)
			N ₁	N ₂	N ₃	N ₄	N ₅		N ₁ : N ₂ : N ₃ : N ₄ : N ₅	
C1154-BL	255.0	229.5	0.335	0.020	0.017	0.200	0.745	5.0	1:0.1:0.075:0.125:0.425	0.25

1. When ordering, please specify **packaging** code:

C1154-BLD

Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (200 parts per full reel).

B = Less than full reel. In tape, but not machine ready.
To have a leader and trailer added (\$25 charge), use code letter D instead.



2. Inductance is for the primary, measured at 275 kHz, 1.0 Vrms.

3. Peak primary current drawn at minimum input voltage.

4. Leakage inductance is for the primary winding with the secondary windings shorted.


5. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

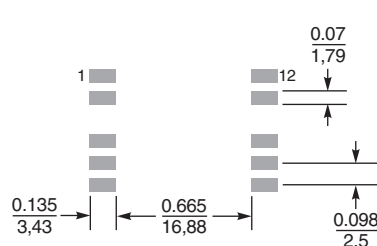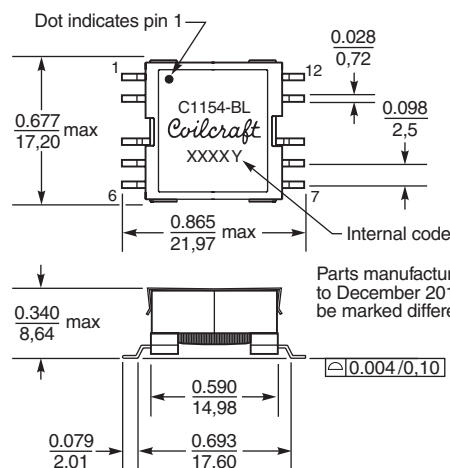

Recommended Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

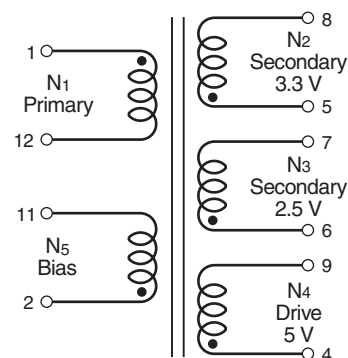

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 457 Revised 4/30/2015

© Coilcraft Inc. 2015

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.