

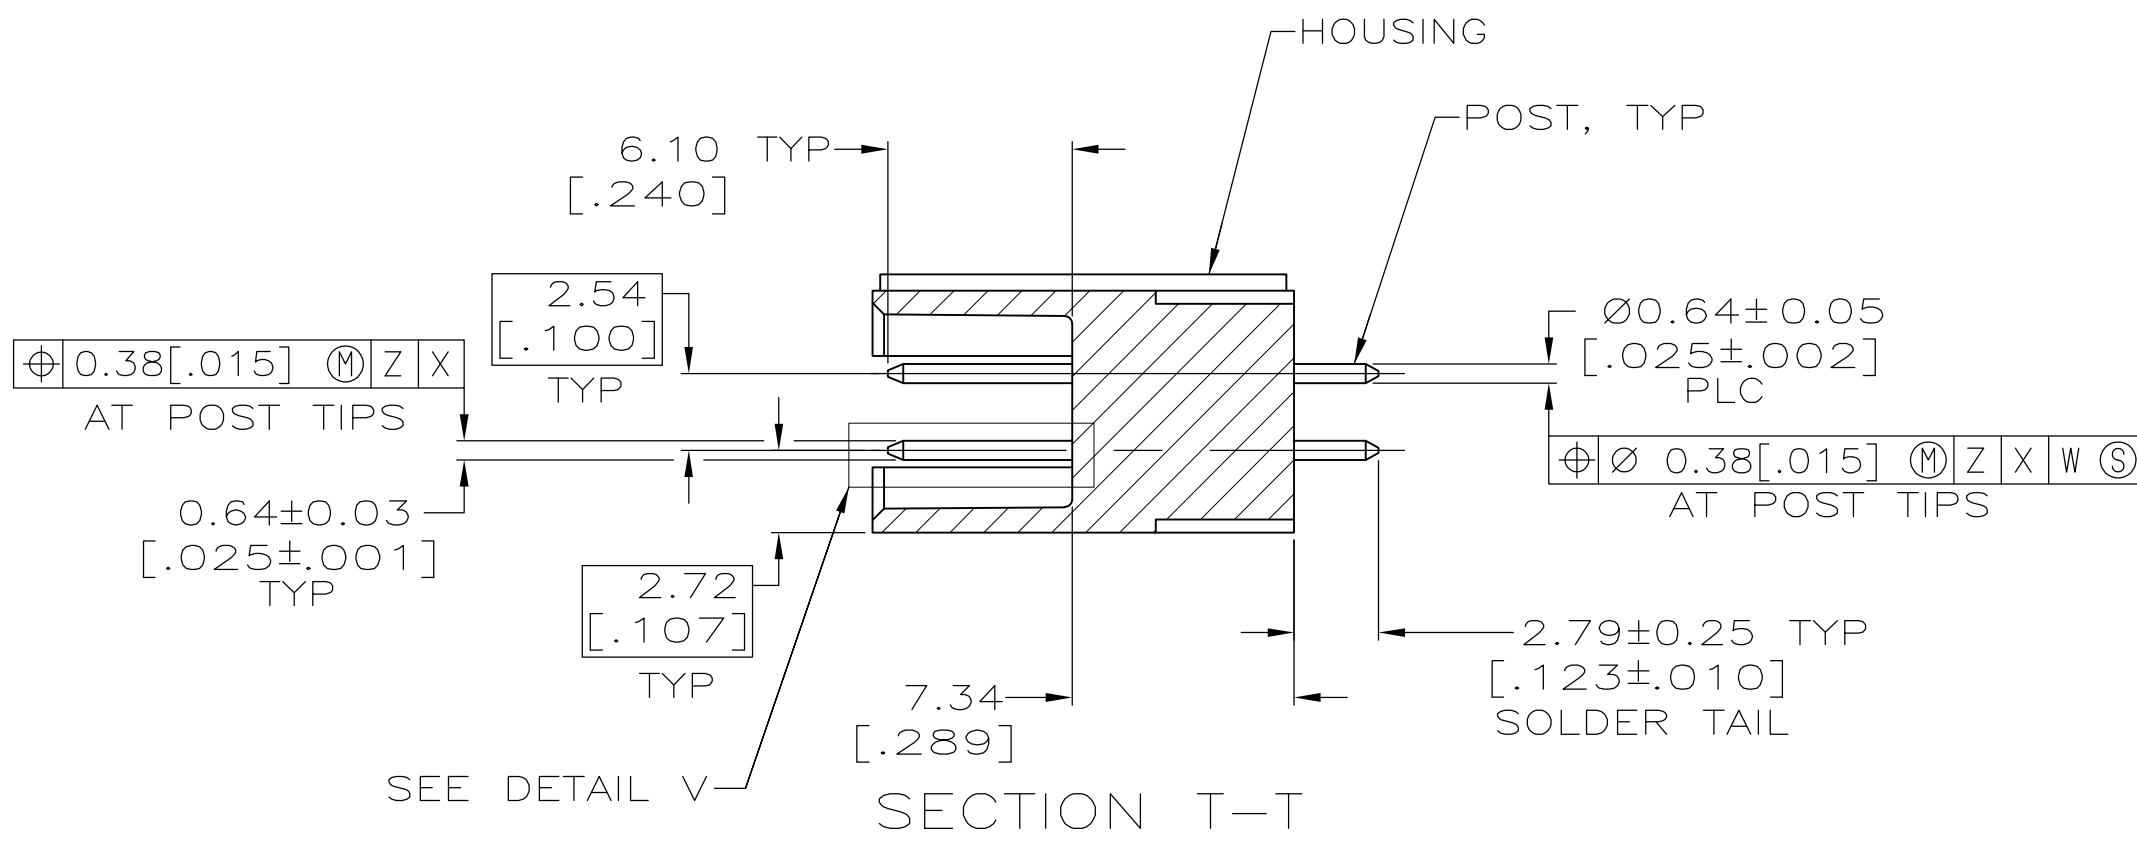


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-10-021203	23NOV10	HMR	SB


EJECTION LATCHES OMITTED IN
THIS VIEW FOR CLARITY

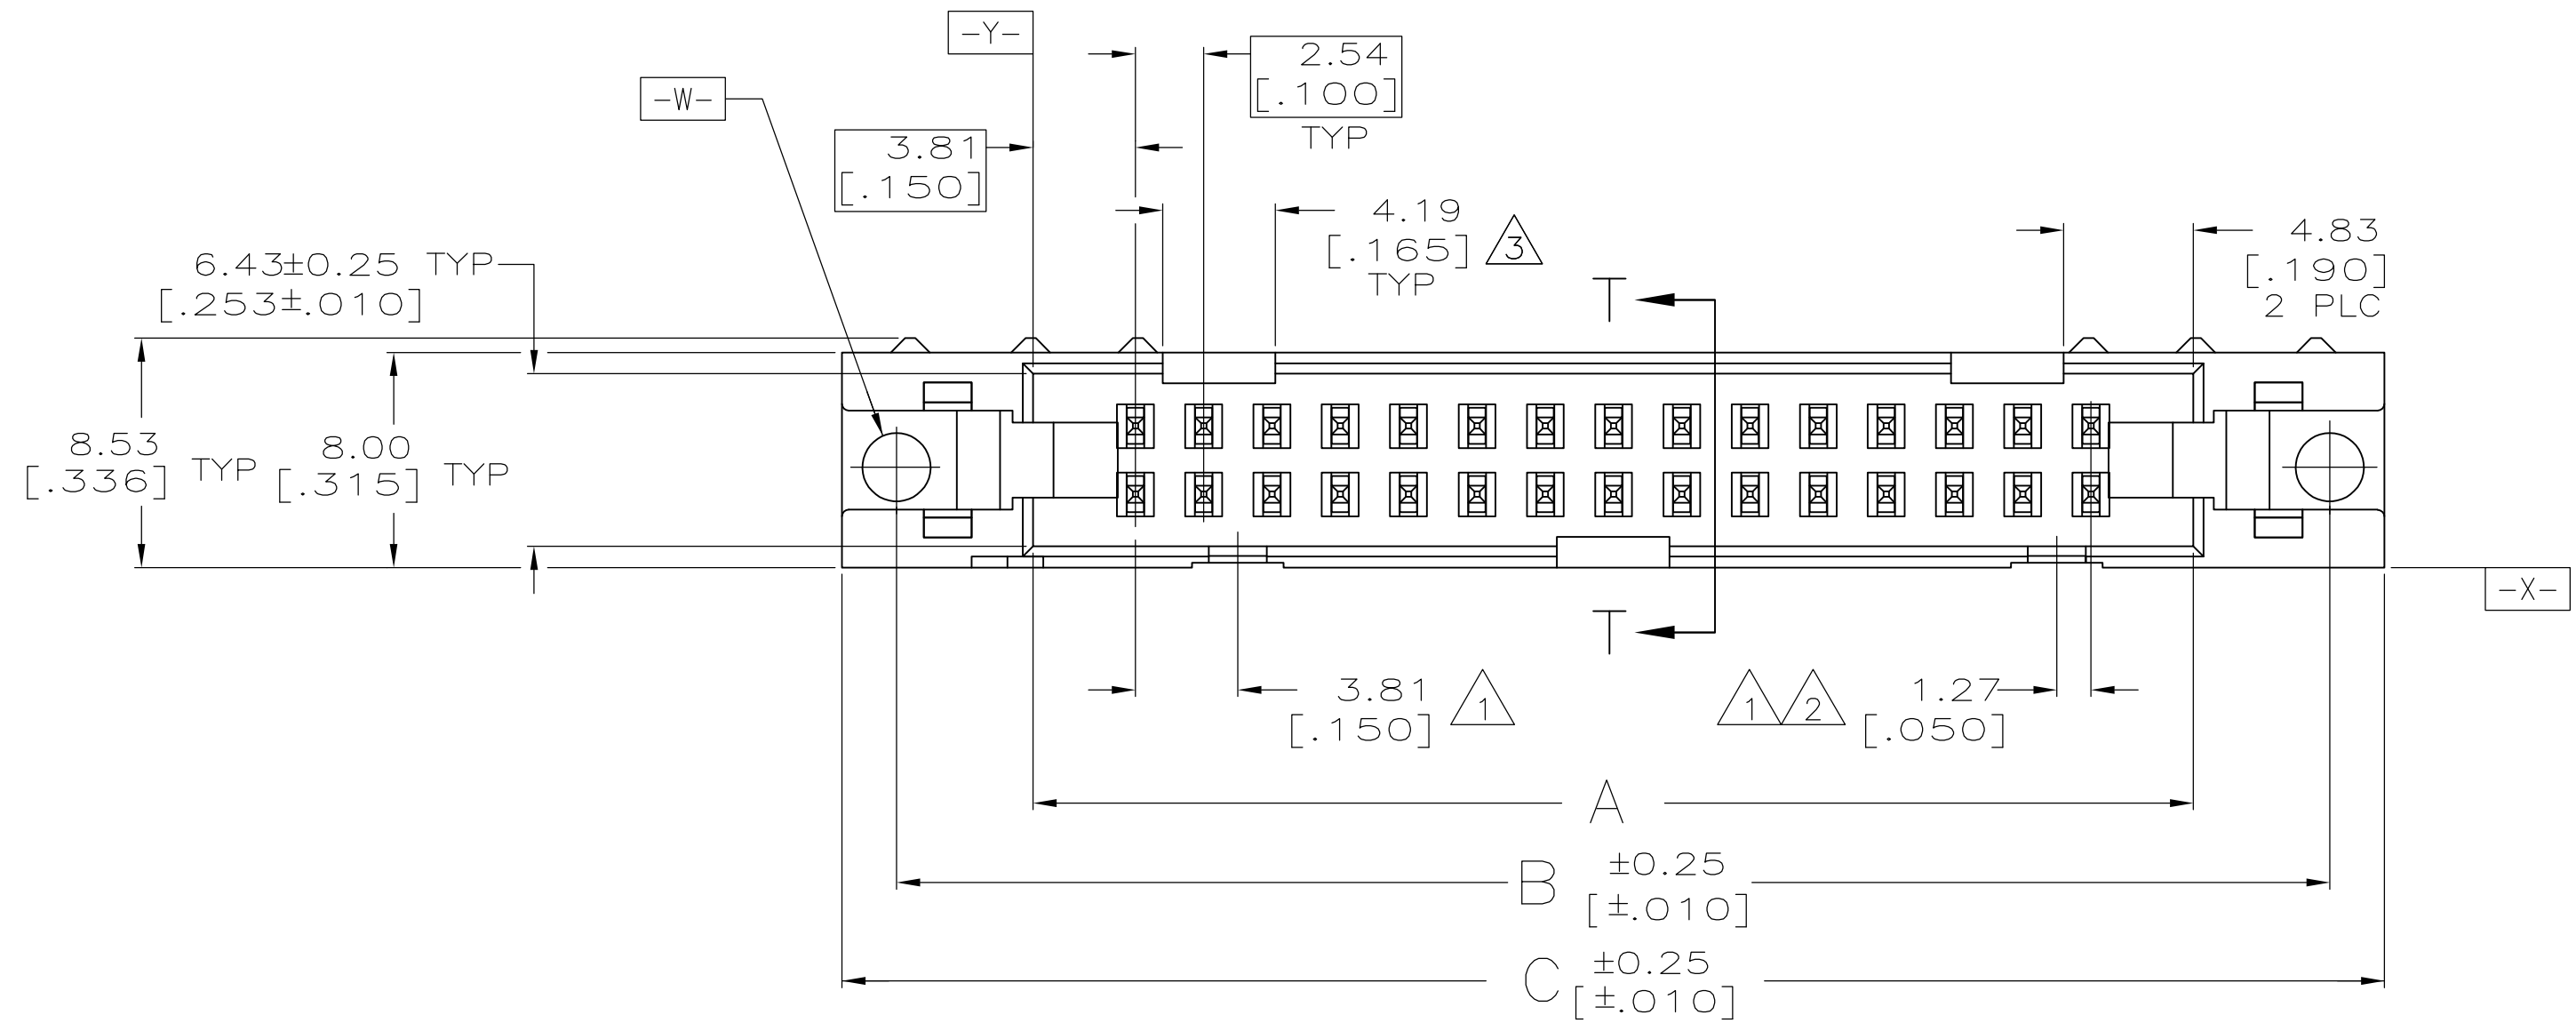

- 1 COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- 2 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- 3 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
- 4 RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [0.062].
- 5 DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- 6 HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER UL94V-0 RATED, BLACK.
- 7 POSTS: PHOS BRONZE OR BRASS.
- 8 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38µm[0.00015] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54µm[0.000100] MIN TIN PLATE ON THE SOLDER-TAILS, 1.27µm[0.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
0.38µm[0.00015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54µm[0.000100] MIN TIN PLATE ON THE SOLDER-TAILS, 1.27µm[0.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 9 DATUMS -M- & -N- TO BE ESTABLISHED BY CUSTOMER.

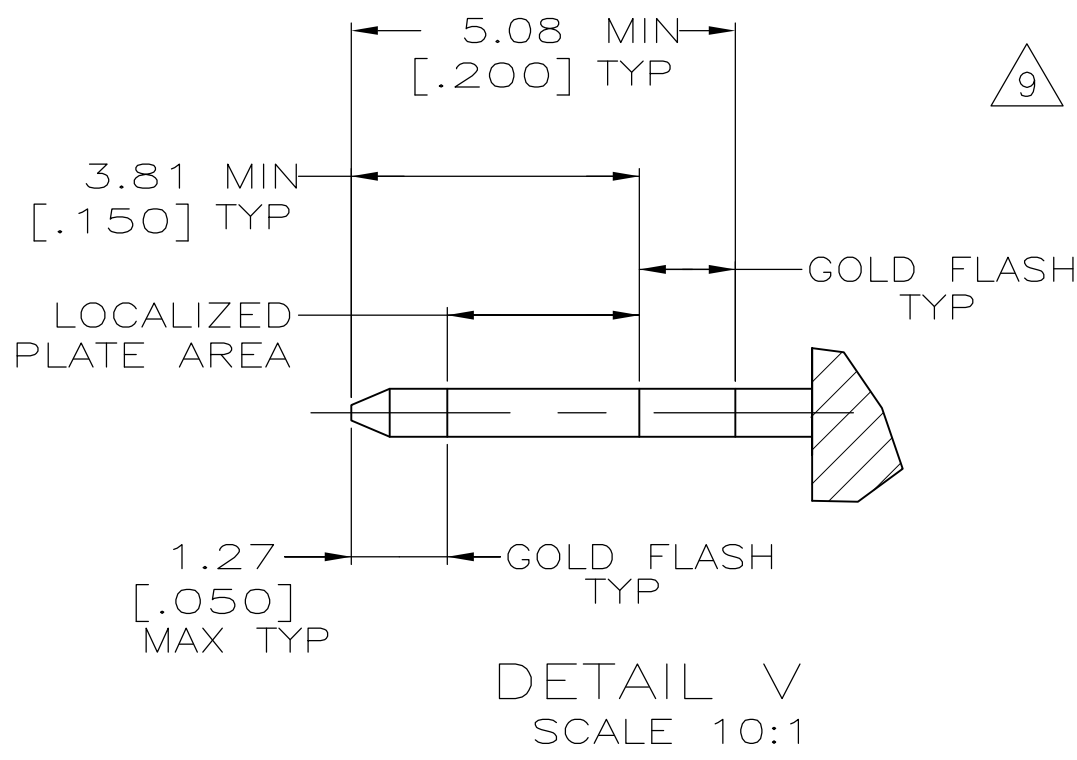

60.96	78.74	72.64	82.80	78.74	68.58	50	1-6364106-0
[2.400]	[3.100]	[2.860]	[3.260]	[3.100]	[2.700]		
60.96	78.74	72.64	82.80	78.74	68.58	50	1-6364106-0
[2.400]	[3.100]	[2.860]	[3.260]	[3.100]	[2.700]		
35.56	53.34	47.24	57.40	53.34	43.18	30	6364106-7
[1.400]	[2.100]	[1.860]	[2.260]	[2.100]	[1.700]		
30.48	48.26	42.16	52.32	48.26	38.10	26	6364106-6
[1.200]	[1.900]	[1.660]	[2.060]	[1.900]	[1.500]		
22.86	40.64	34.54	44.70	40.64	30.48	20	6364106-4
[.900]	[1.600]	[1.360]	[1.760]	[1.600]	[1.200]		
15.24	33.02	26.92	37.08	33.02	22.86	14	6364106-2
[.600]	[1.300]	[1.060]	[1.460]	[1.300]	[.900]		
OBSOLETE	10.16	27.94	21.84	32.00	27.94	10	6364106-1
	[.400]	[1.100]	[.860]	[1.260]	[1.100]		
F	E	D	C	B	A	NO OF POSN	PART NUMBER

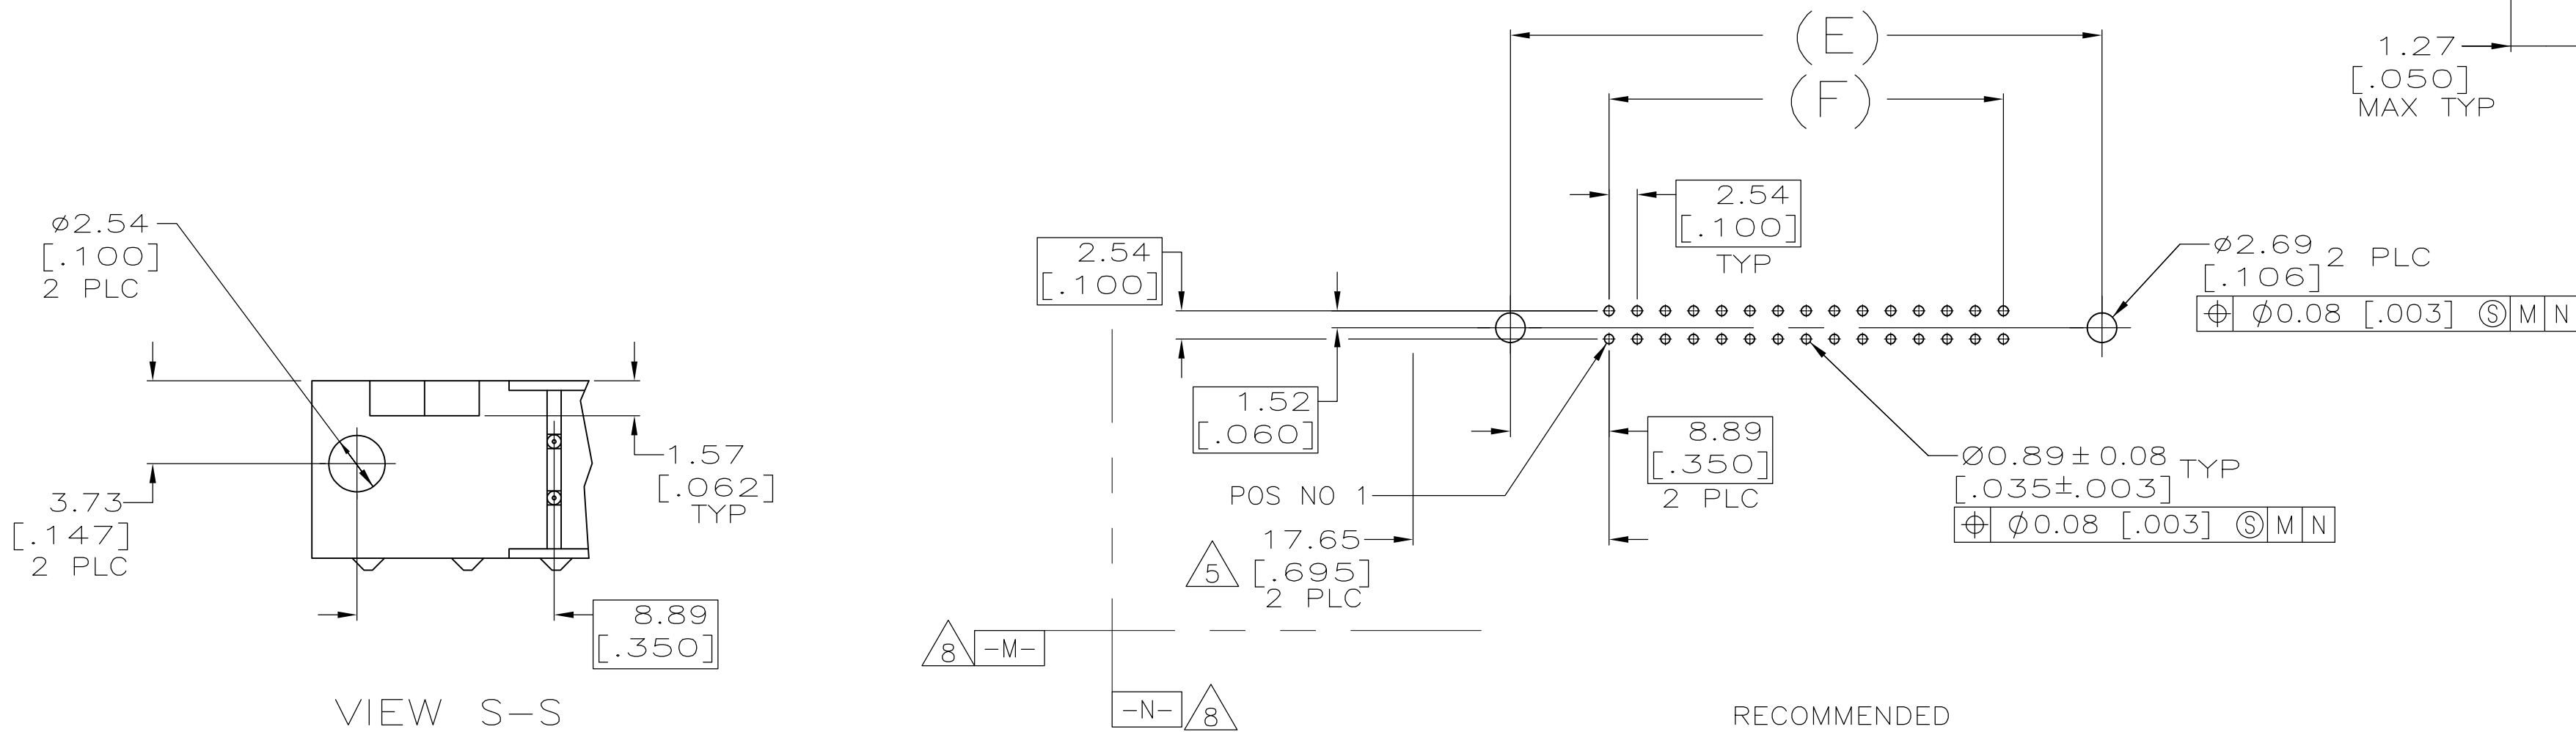

RECOMMENDED
PC BOARD MOUNTING DIMENSIONS
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCK5 01-07-05	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm [INCHES]		CHK S. BOLASH 01-07-05	NAME M. WALMSLEY 01-07-05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-40018			
0 PLC ± -		APPLICATION SPEC			
1 PLC ± -		SIZE			
2 PLC ± 0.13[.005]		CAGE CODE			
3 PLC ± -		DRAWING NO			
4 PLC ± -		RESTRICTED TO			
ANGLES ± -		WEIGHT			
FINISH		A1 00779C=6364106			
MATERIAL		CUSTOMER DRAWING			
					
6		7			
		SCALE 4:1 SHEET 1 OF 1 REV C			