

Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 1.9 mm, Color: white, Contact surface: Tin, Length of the punched-on cables: 500 mm for flexible PCBs with a width of 8 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Product Features

- The small size enables connection even in applications where space is limited
- Easy connection of the PCB saves time
- According to IEC 60838-2-2
- The tight fit on the PCB and high current carrying capacity create a safe connection



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	20 pc
Weight per Piece (excluding packing)	15.0 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Dimensions

Length	9 mm
Height	4.8 mm
Width	9.2 mm
Pitch	1.9 mm

General

Insulating material group	IIIa
Rated voltage (III/2)	24 V
Nominal current I_N	10 A
Nominal cross section	0.34 mm ²

Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

Technical data

General

Maximum load current	10 A (Total current of all contacts)
Insulating material	PBT
Inflammability class according to UL 94	V0
Number of positions	4

Classifications

eCl@ss


eCl@ss 5.1	27141190
eCl@ss 6.0	27141190
eCl@ss 8.0	27440402

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002643

Drawings

Drilling diagram

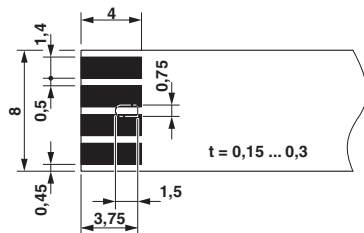

Dimensional drawing

