

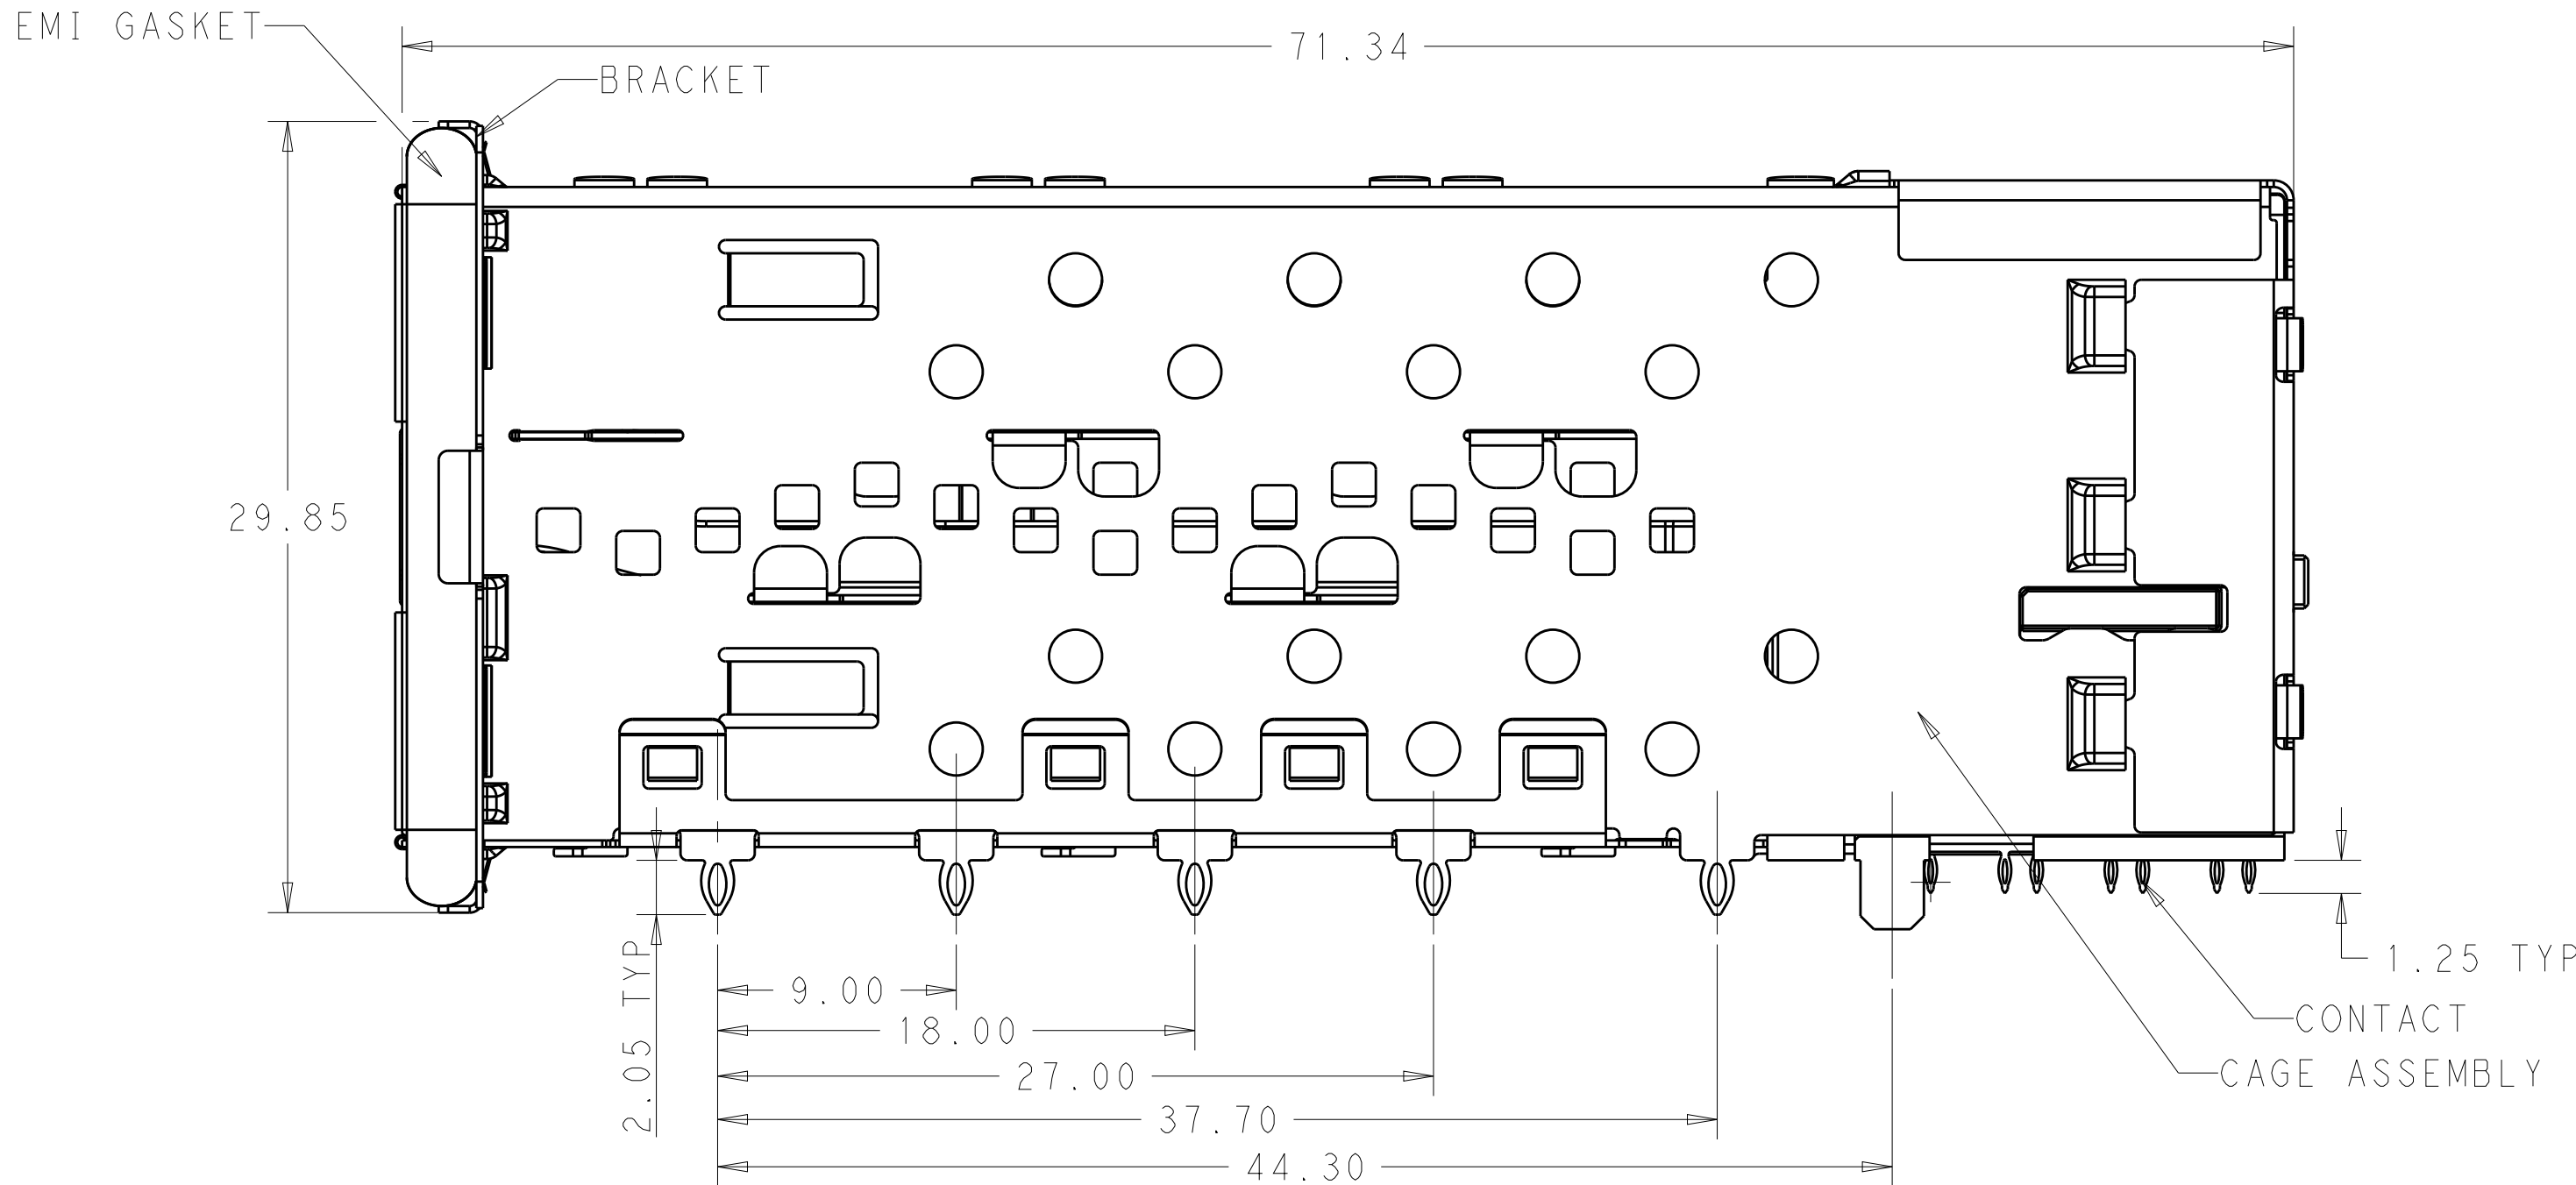



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	RELEASE PER ECO-16-001264	1FEB2016	RG	SH
			B	REVISE PER ECO-17-008876	3AUG2017	RG	SH

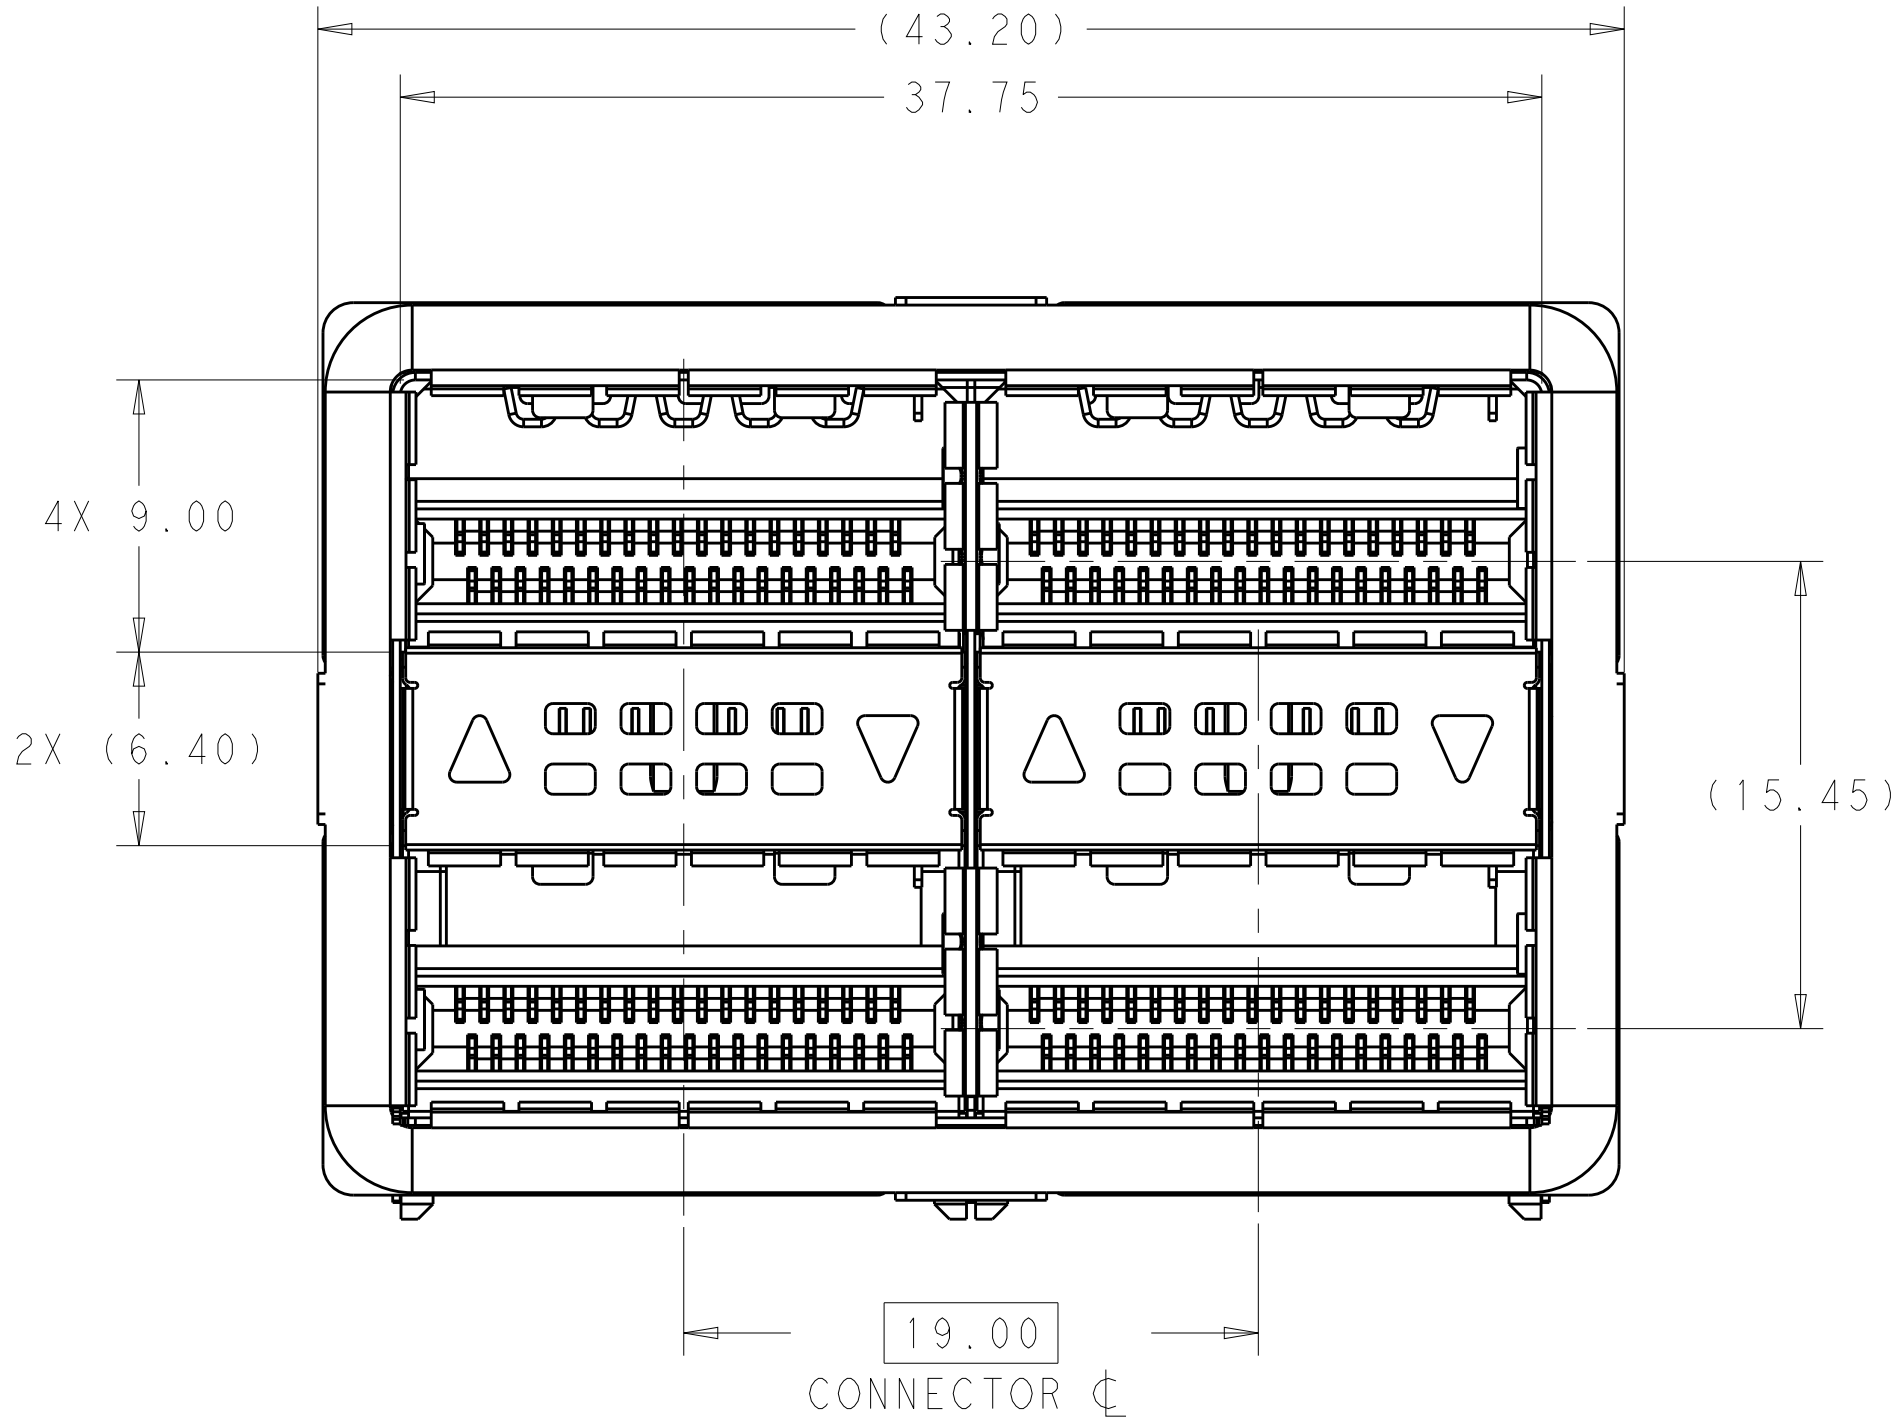


- 1 MATERIAL:
CAGE ASSEMBLY- STAINLESS STEEL.
BRACKET- STAINLESS STEEL.
EMI GASKET- NIKCEL-GRAPHITE FILLED SILICONE.
HOUSING- BLACK LCP,UL 94V-0 RATED
CHICKLET- BLACK LCP,UL 94V-0 RATED
LIGHT PIPE- POLYCARBONATE, CLEAR, UL 94V-0 RATED
CONTACT- COPPER ALLOY.
GASKET - CONDUCTIVE RUBBER, UL 94V-0 RATED
- 2 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
3. MINIMUM PCB THICKNESS OF 1.57mm.
- 4 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-127010. BASED ON EIA/ECA-364-1000.01A. (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE.
- 5 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES. TOP SIDE ONLY. TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN.
- 6 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm.
7. CAGE FINISH-1.25 μ m MINIMUM NICKEL PLATING.
- 8 KEEP THE GAP BETWEEN LEDS 0.5mm MINIMUM.

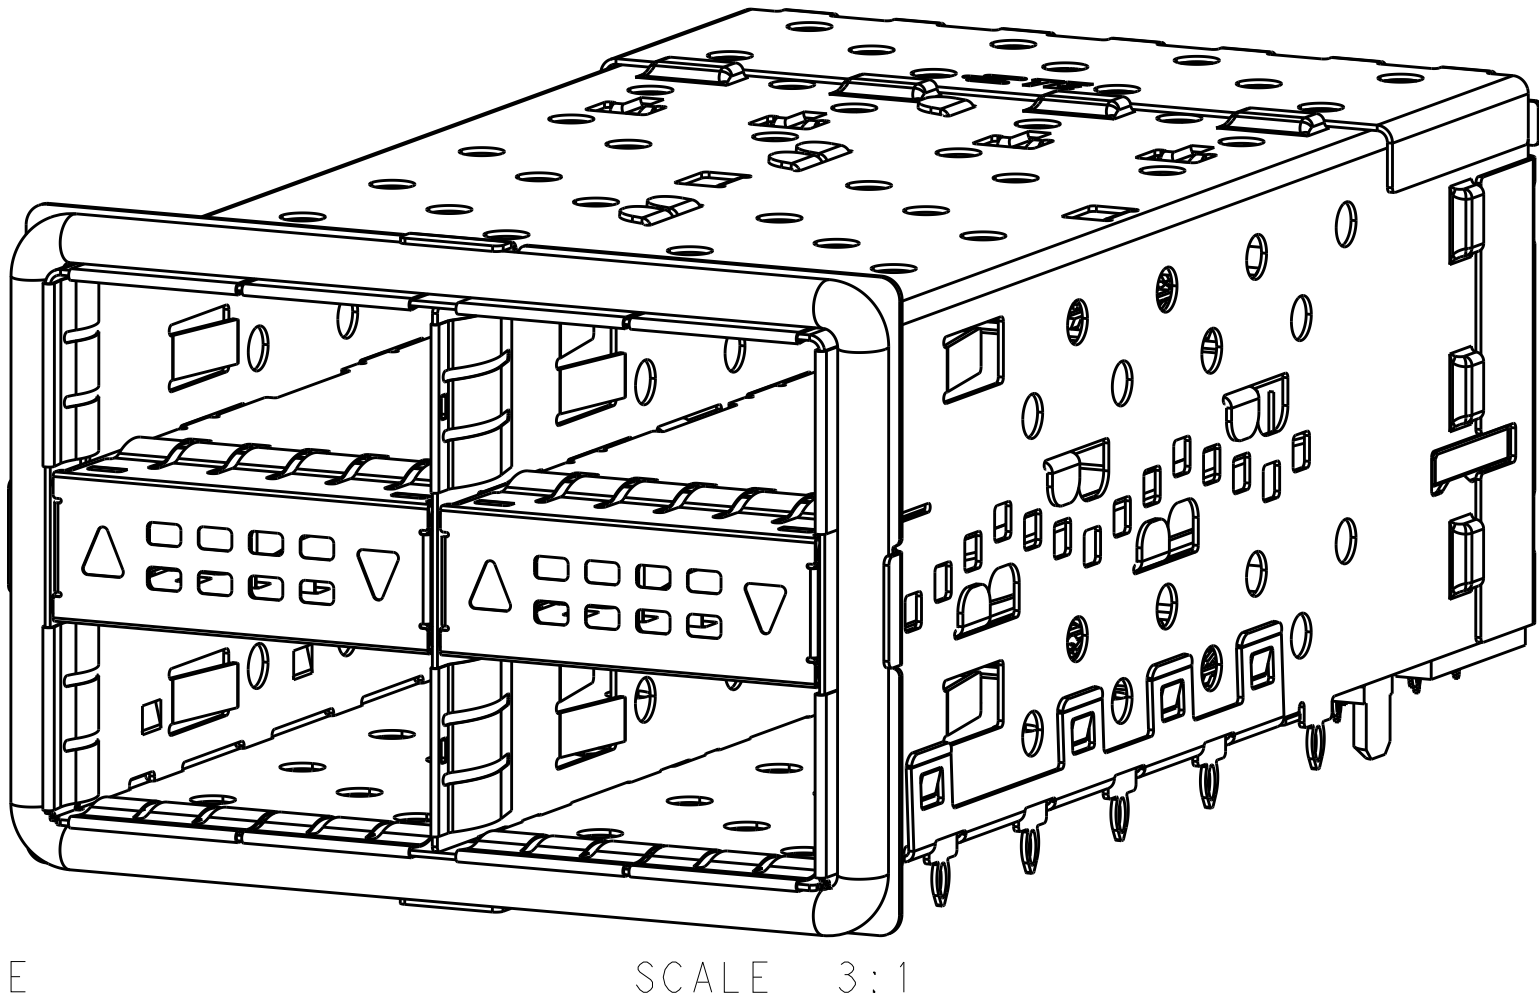


BOTH LIGHT PIPES WITH DOWN DIRECTION	1-2214574-0
3 ROUND VENT HOLES	2214574-9
BOTH LIGHT PIPES	2214574-8
BOTH LIGHT PIPES	2214574-7
INNER LIGHT PIPES	2214574-6
OUTER LIGHT PIPES	2214574-5
NO LIGHT PIPES	2214574-4
BOTH LIGHT PIPES	2214574-3
INNER LIGHT PIPES	2214574-2
OUTER LIGHT PIPES	2214574-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ROBERT GAN 20APR2013	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK JASON YANG 20APR2013		
DIMENSIONS:		APVD ALEX CAL 20APR2013	NAME	
		PRODUCT SPEC	CAGE AND PT CONNECTOR ASSEMBLY WITH EMI GASKET, PRESS FIT, 2X2, STACKED QSFP+	
MATERIAL		108-127010	SIZE	
		APPLICATION SPEC	CAGE CODE DRAWING NO	
		114-32020	RESTRICTED TO	
		WEIGHT	A1 00779C= 2214574	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 4 REV B

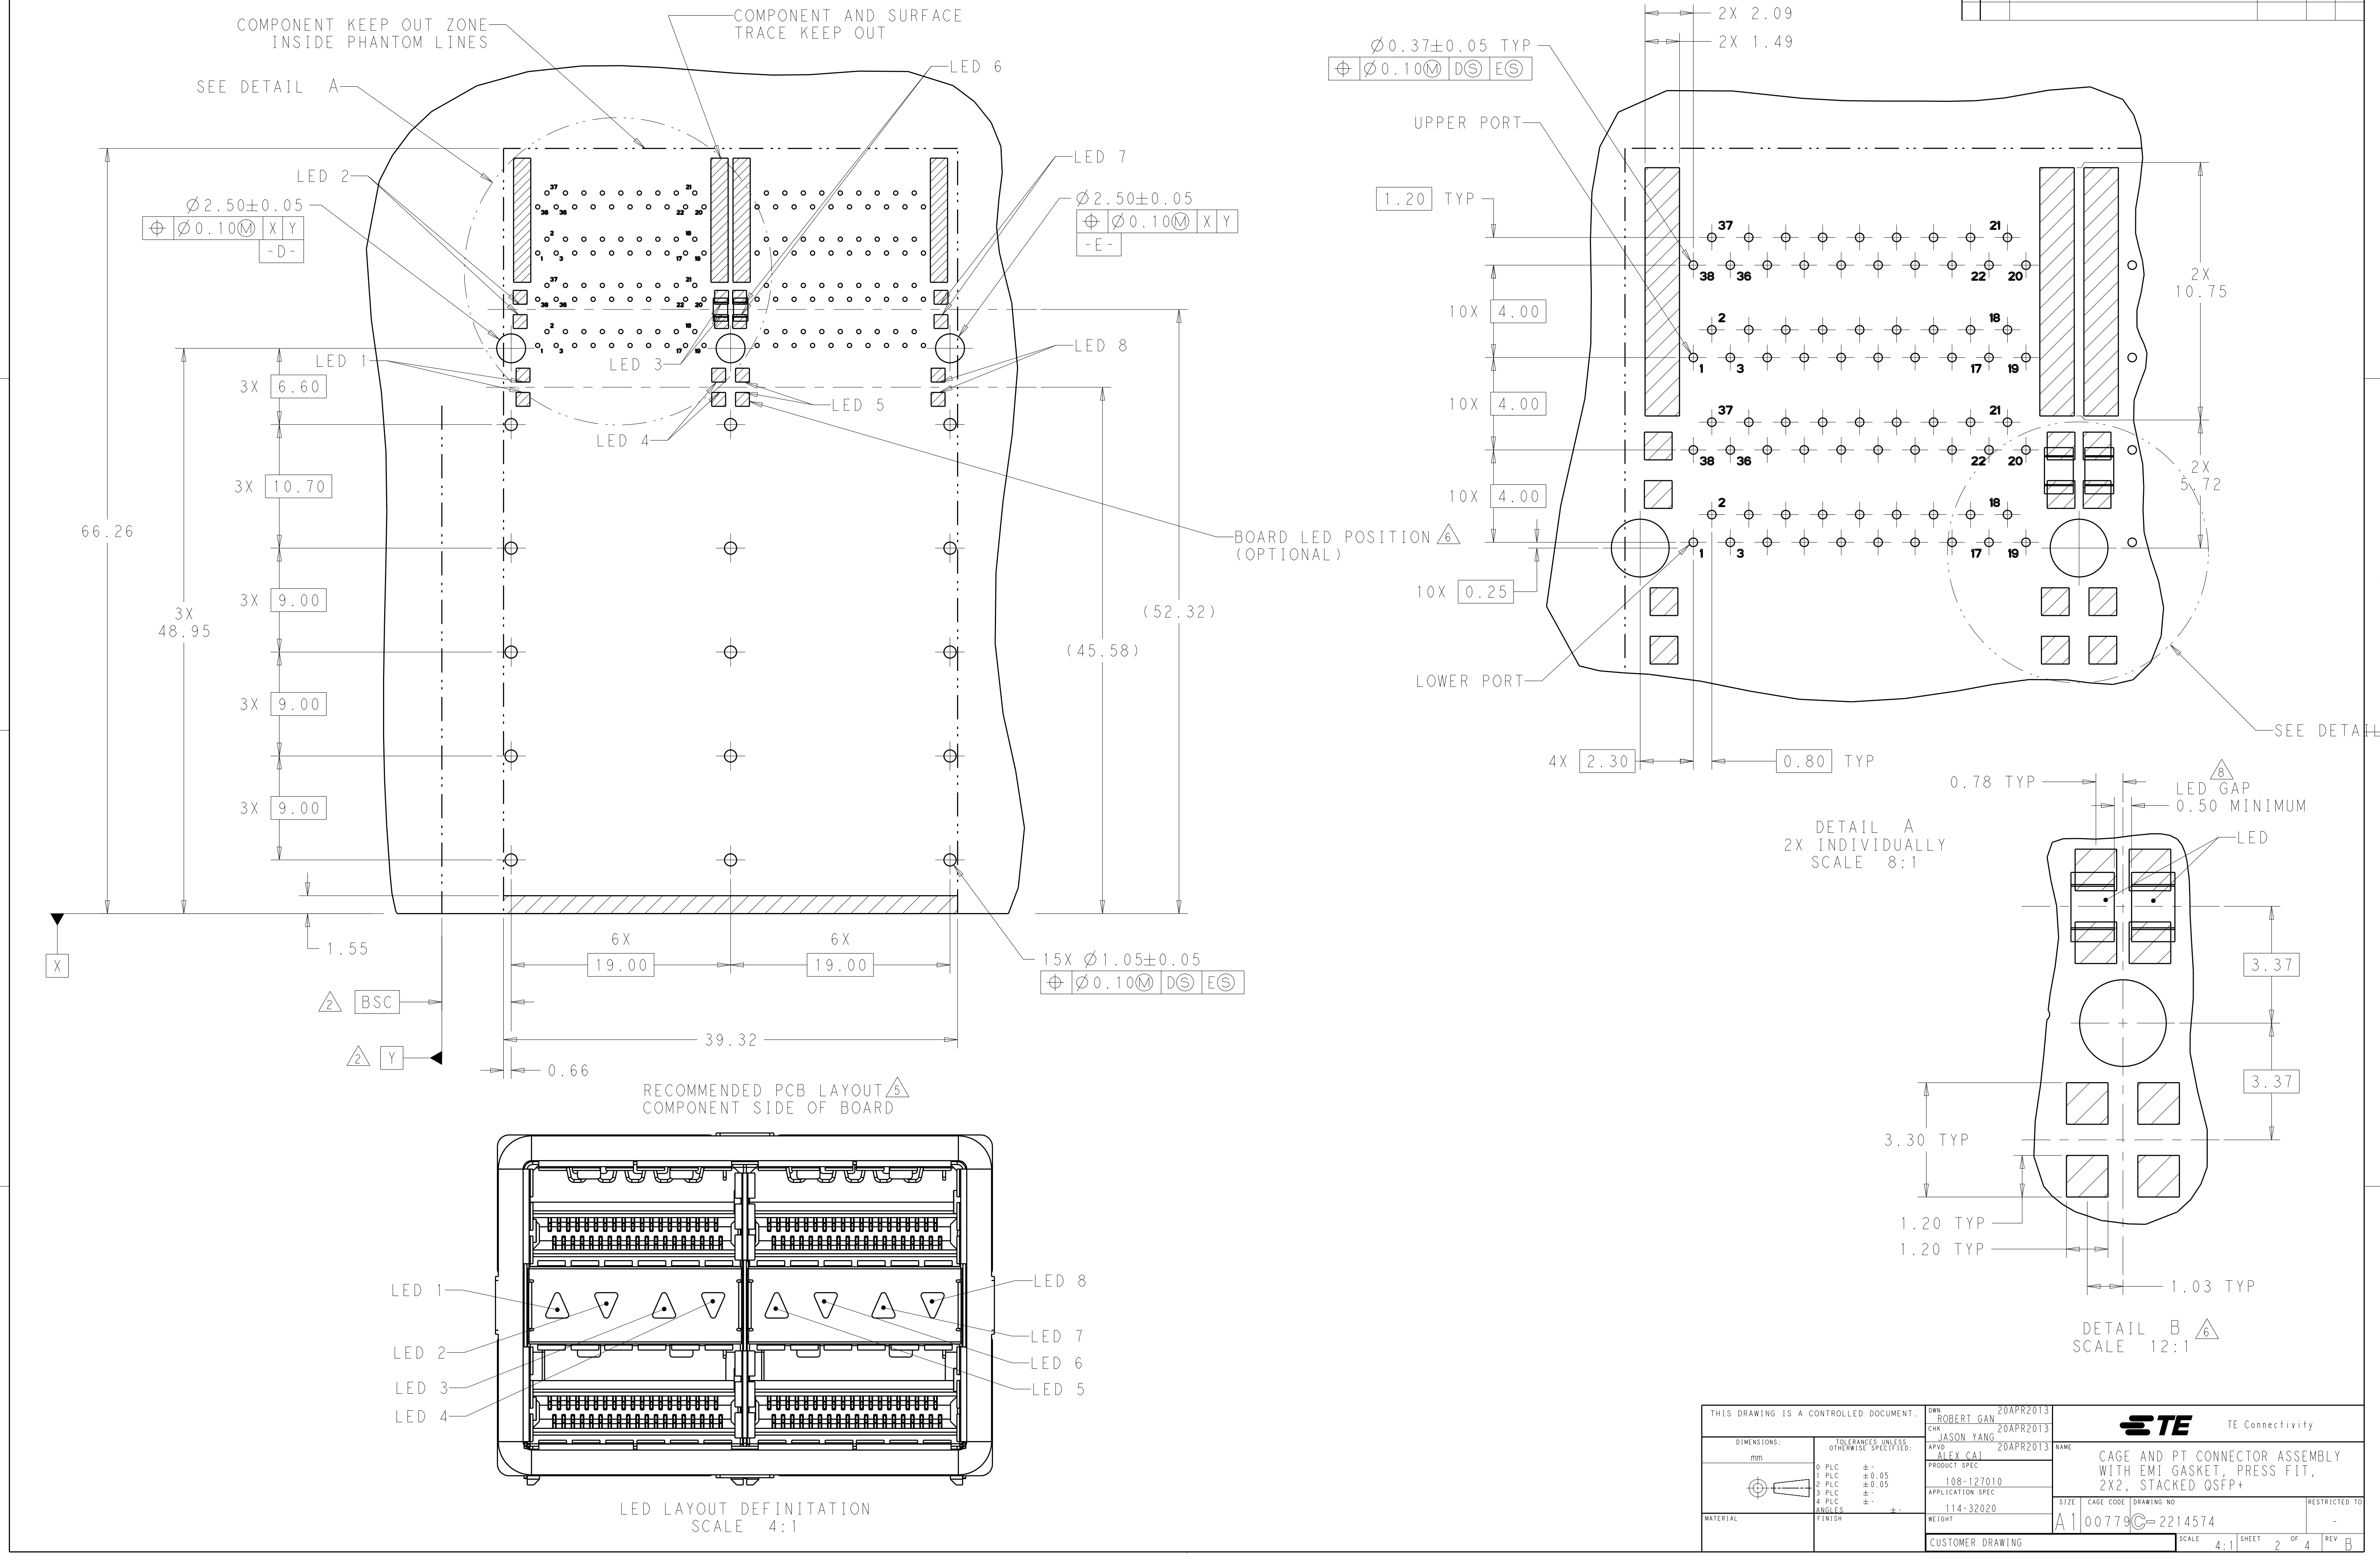


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

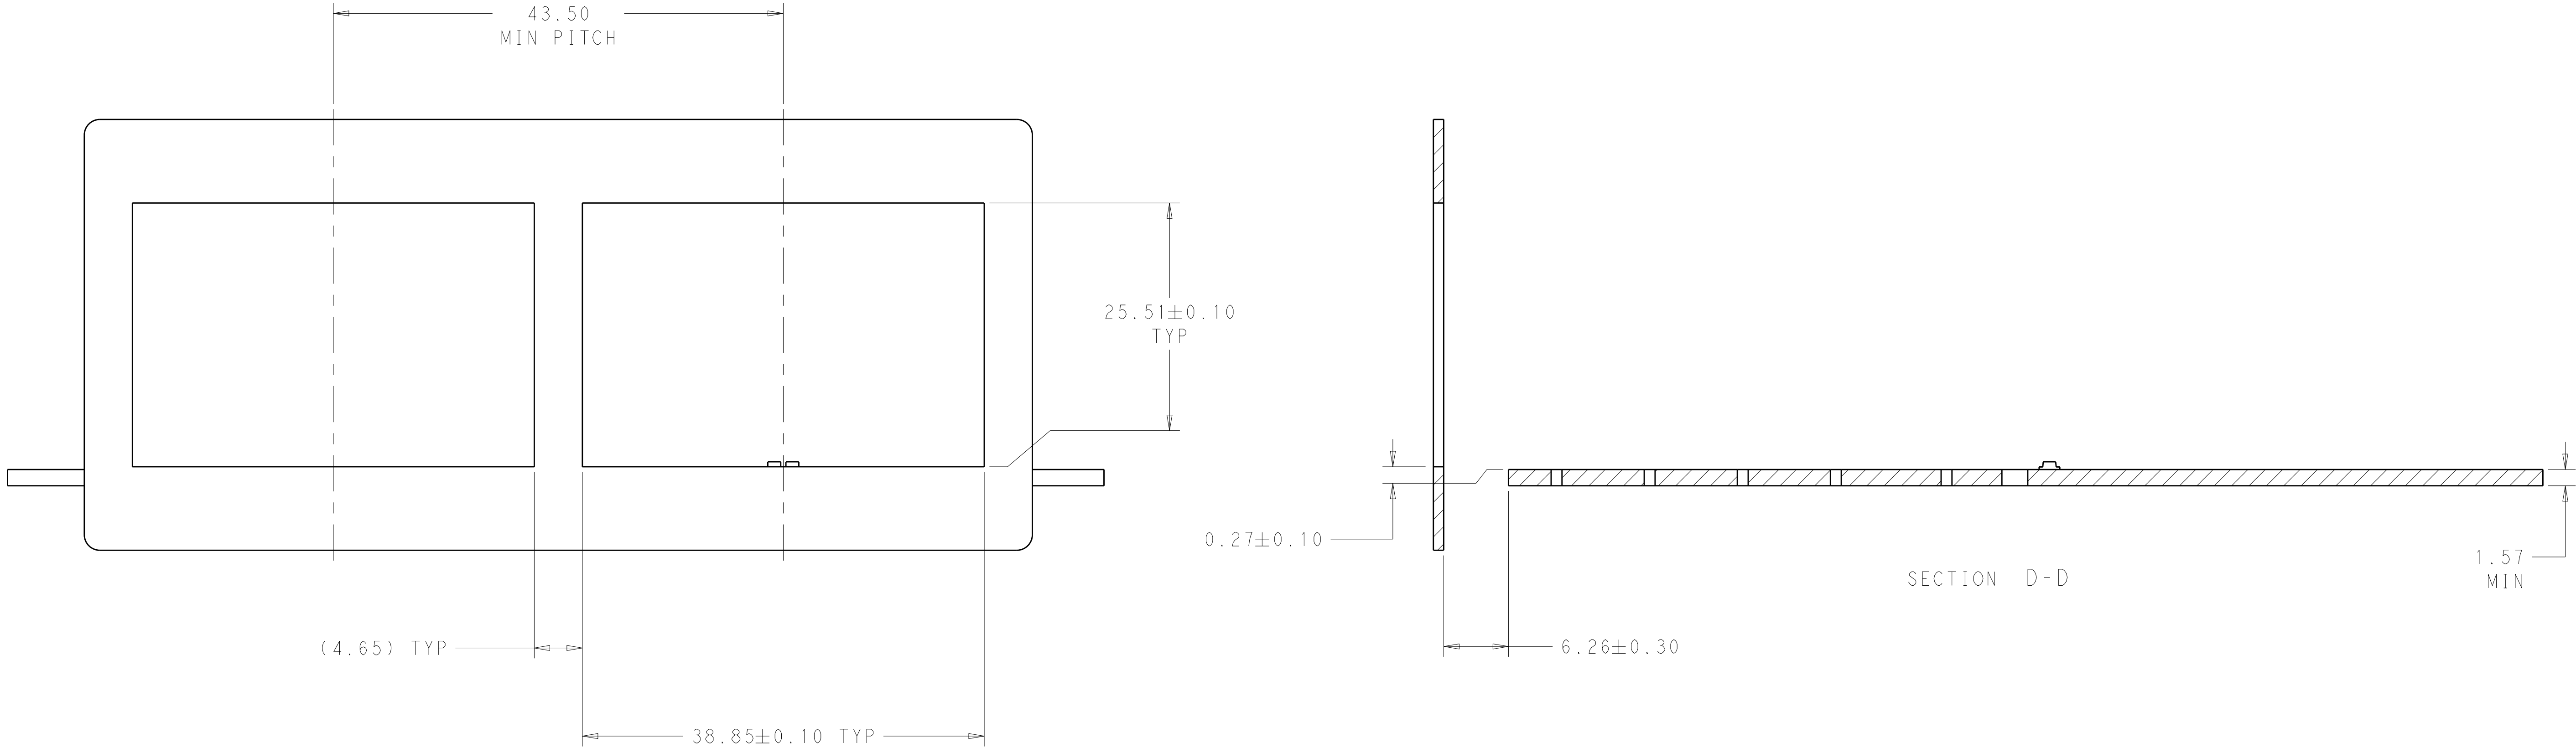


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	ROBERT GAN		20APR2013		 TE Connectivity					
				CHK	JASON YANG		20APR2013							
				APVD	ALEX CAI		20APR2013		NAME		CAGE AND PT CONNECTOR ASSEMBLY WITH EMI GASKET, PRESS FIT, 2X2, STACKED QSFP+			
DIMENSIONS:														


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

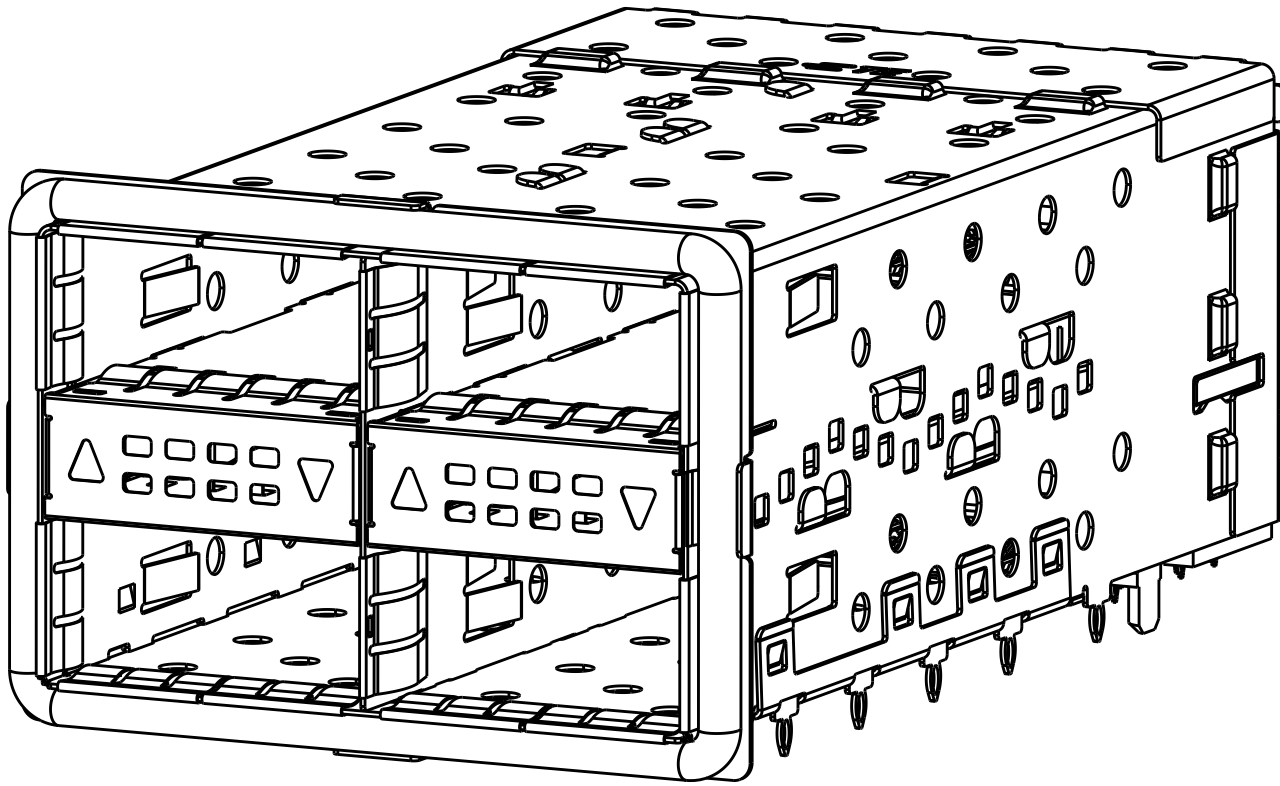


2214574-1

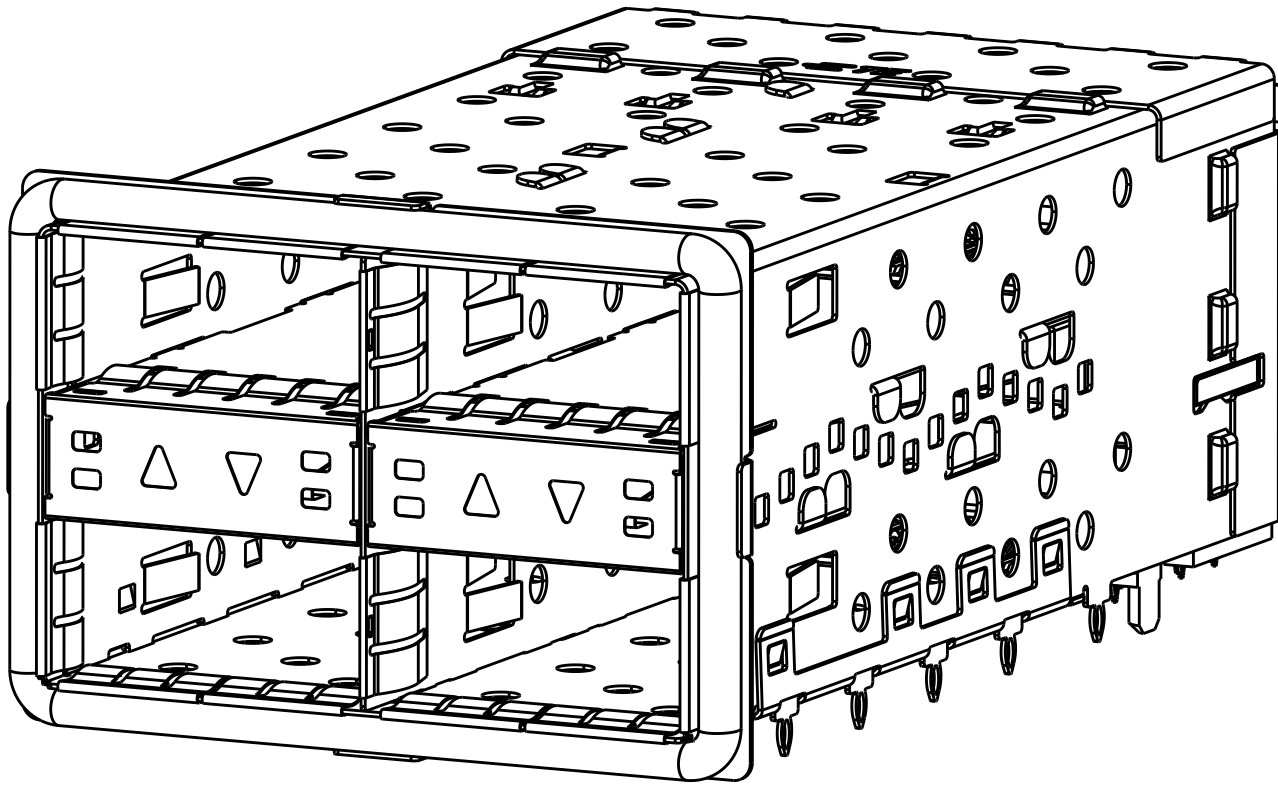


2214574-2

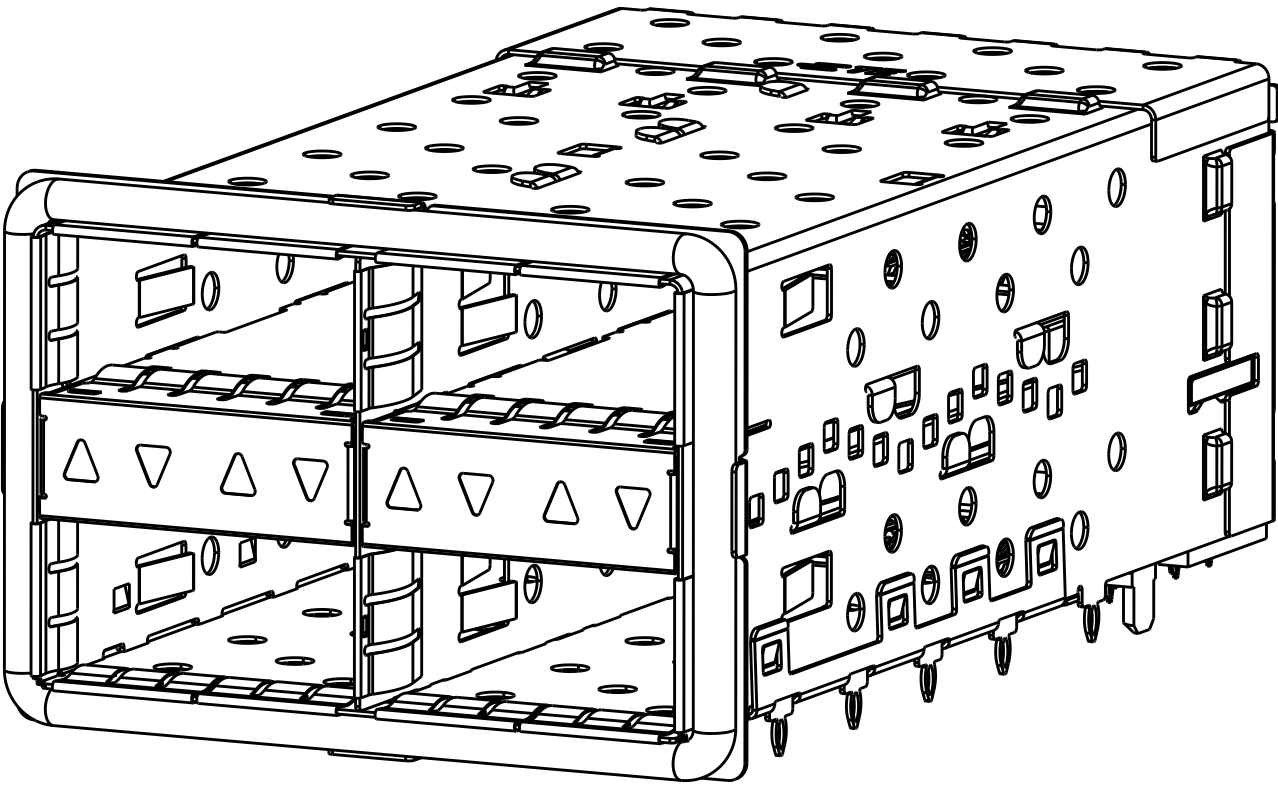


2214574-3

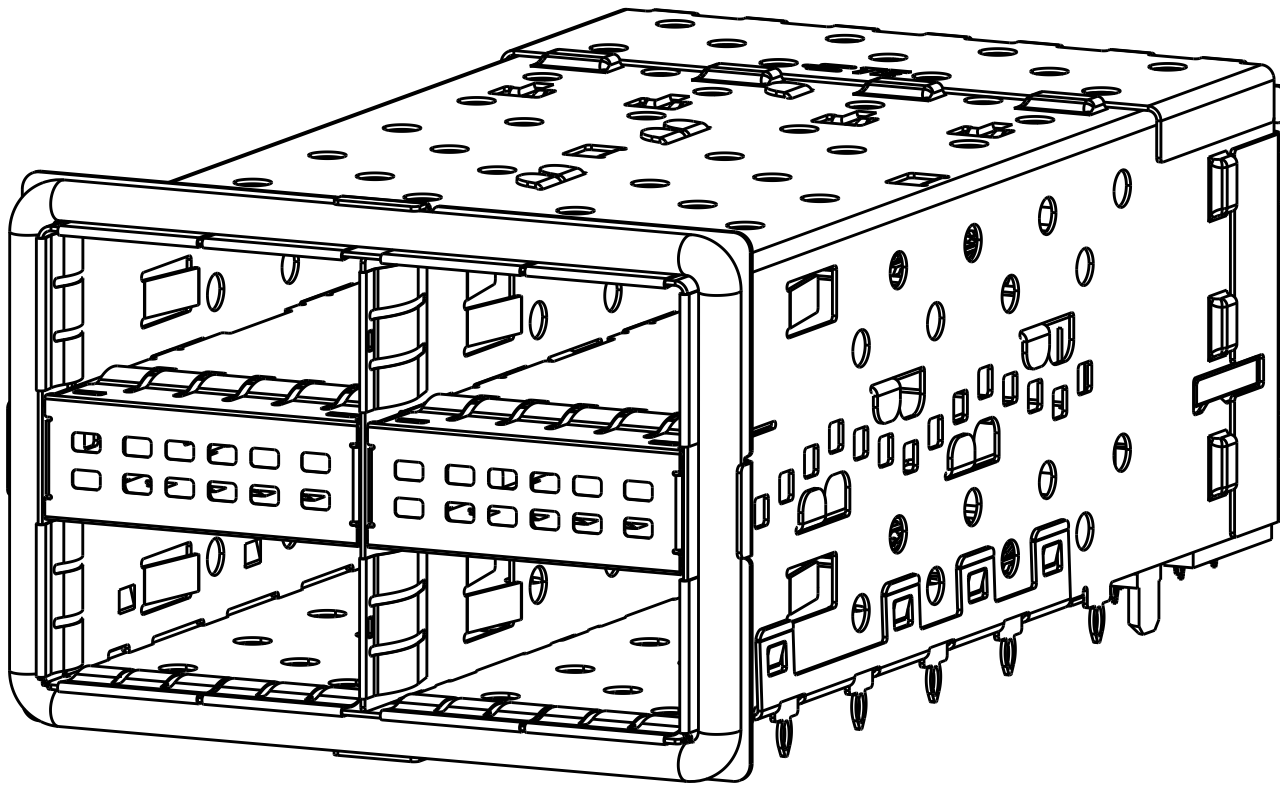


2214574-4

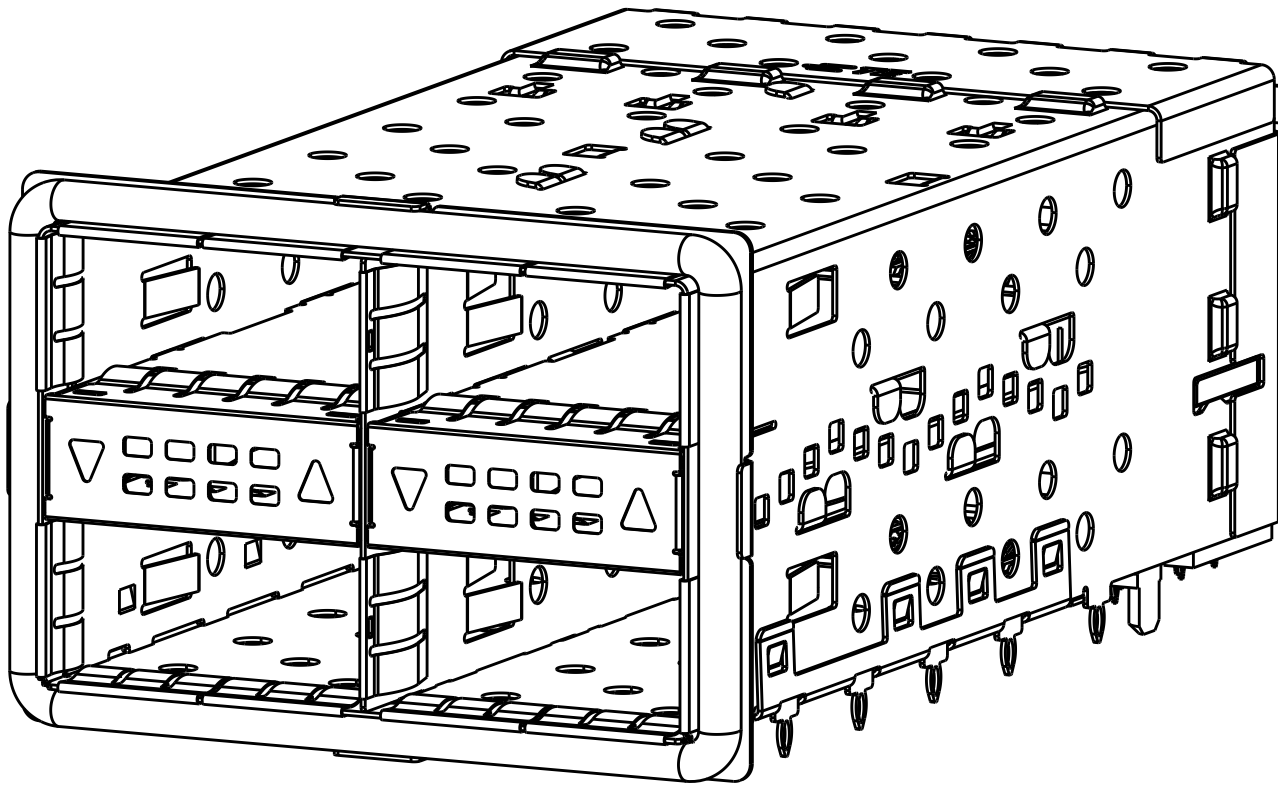


2214574-5

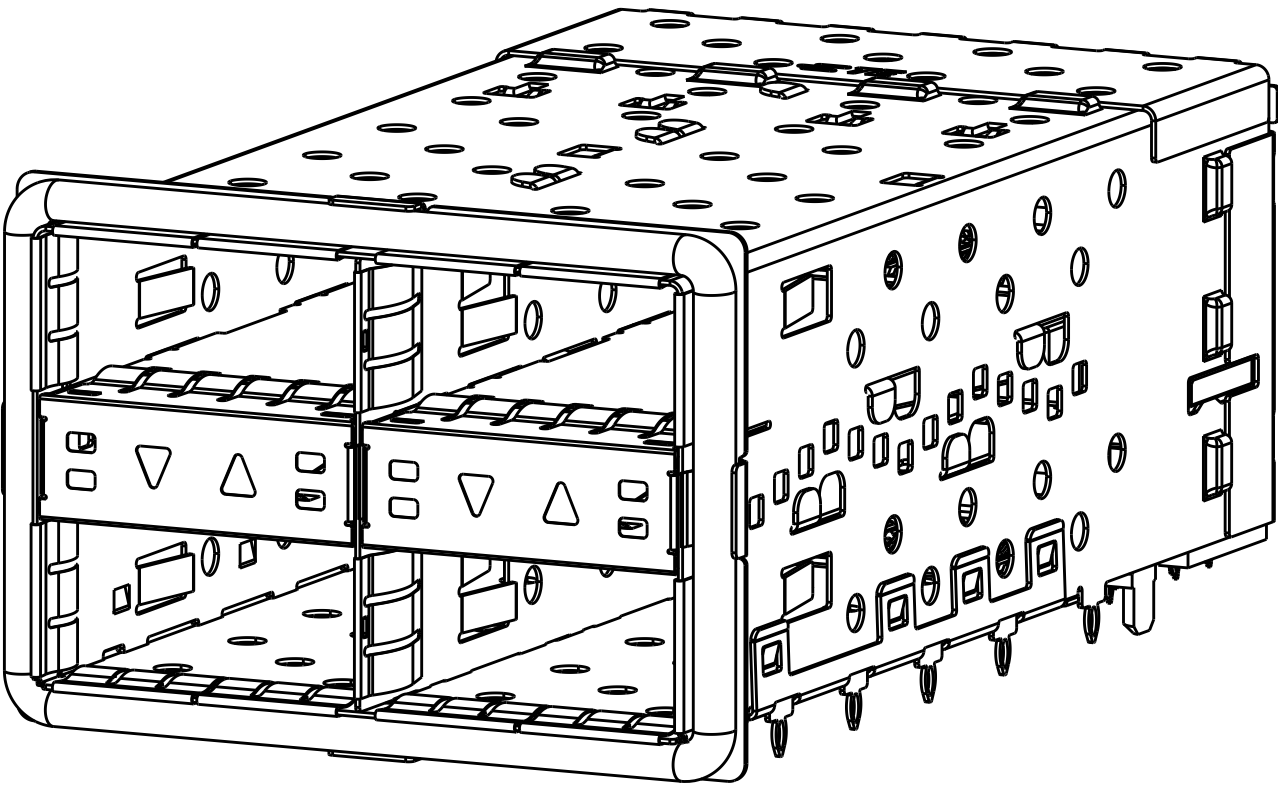


2214574-6

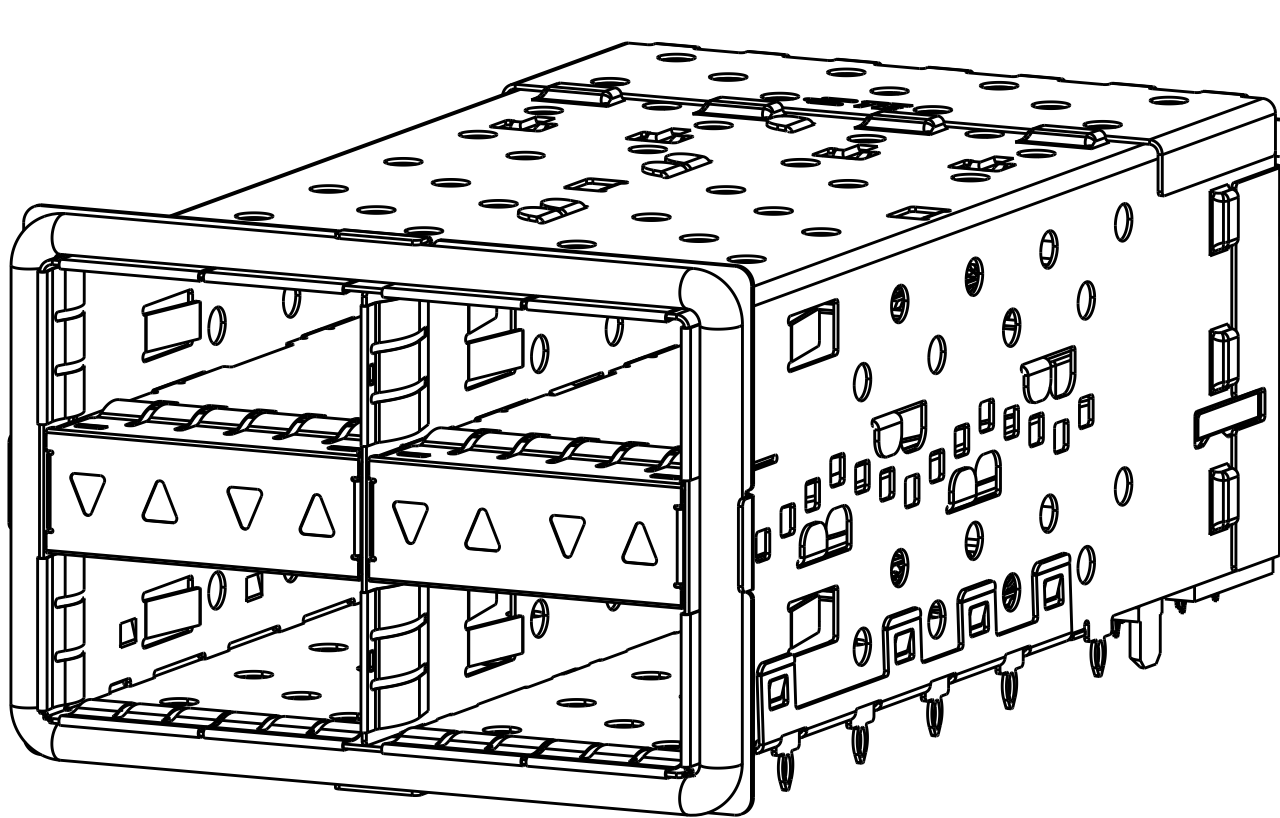


2214574-7

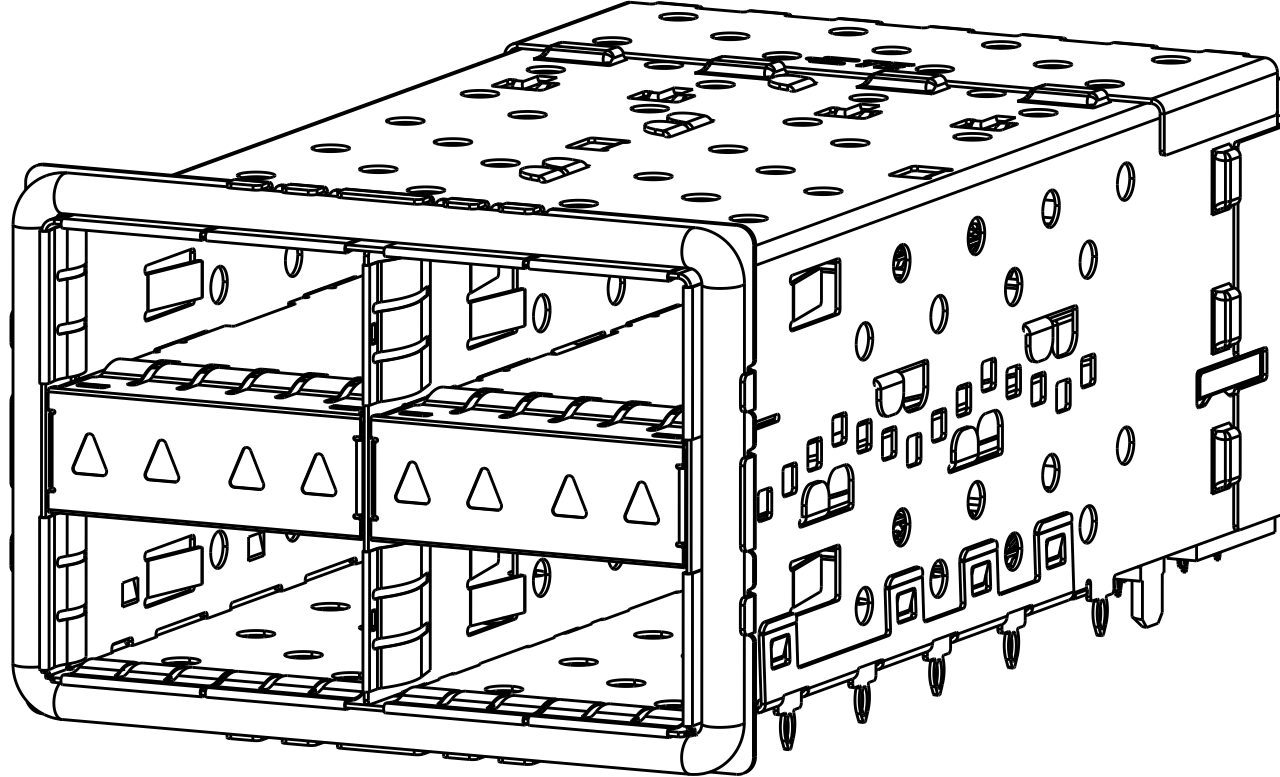

2214574-8

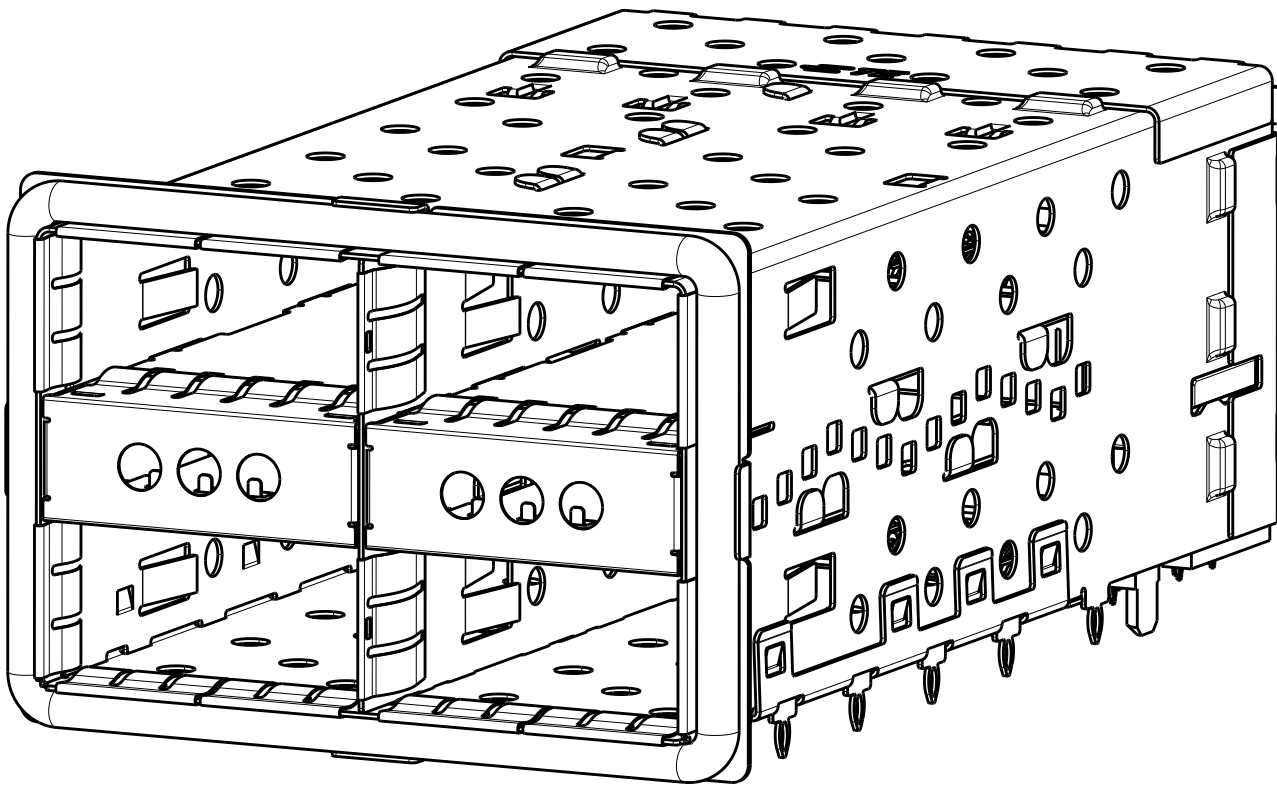

2214574-9

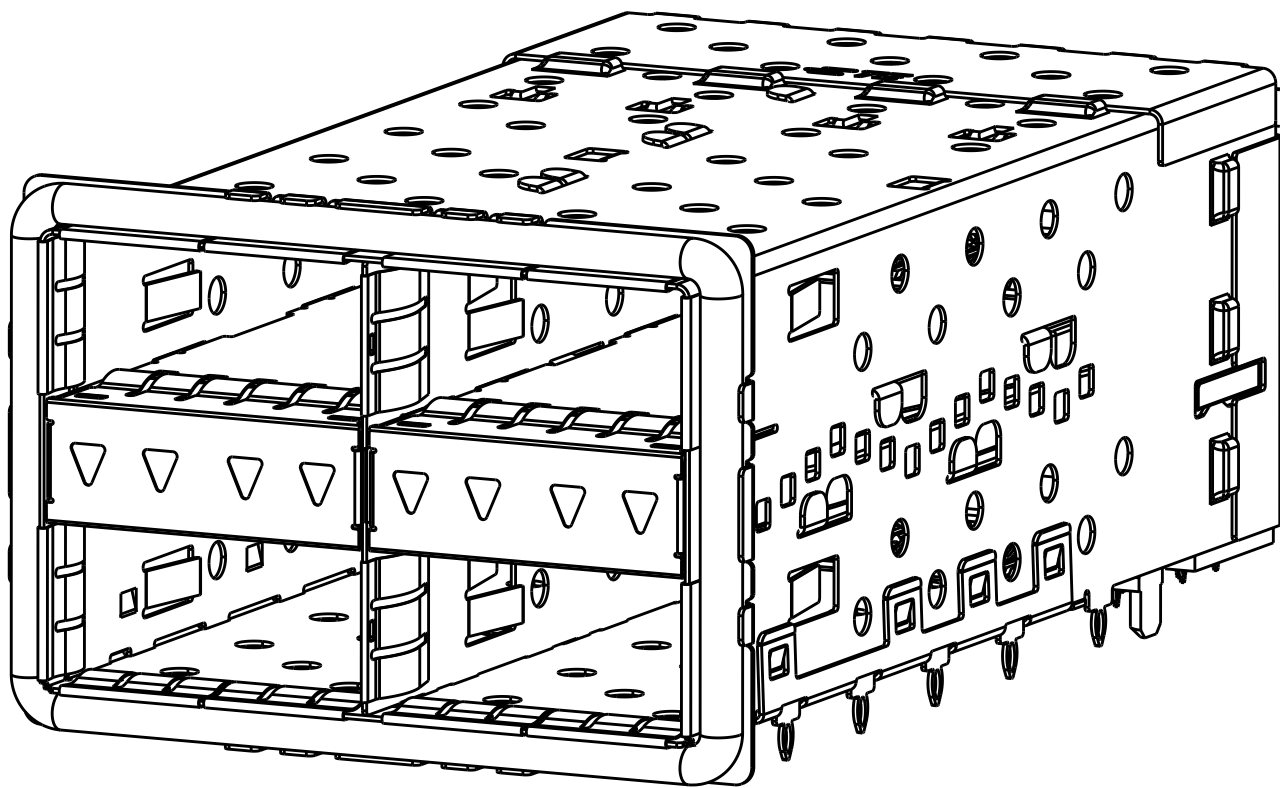

1-2214574-0

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: ROBERT GAN 20APR2013		 TE Connectivity	
		CHK: JASON YANG 20APR2013			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME: CAGE AND PT CONNECTOR ASSEMBLY WITH EMI GASKET, PRESS FIT, 2X2, STACKED QSFP+	
mm		APVD: ALEX CAI 20APR2013			
	PRODUCT SPEC		DRAWING NO: 2214574		
	108-127010				
	APPLICATION SPEC				
	114-32020				
	WEIGHT				
MATERIAL		FINISH		RESTRICTED TO	
				-	
CUSTOMER DRAWING				SCALE: 4:1	
				SHEET 4 OF 4	
				REV B	