

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0765603108

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 6 Pair RAM Right Angle Header, Left Guided, Open Endwall, 10 Columns, 180 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:

Drawing (PDF)

Product Specification PS-76060-999 (PDF)

Application Specification AS-76060-990 (PDF)

Application Specification AS-76060-9999 (PDF)

Packaging Specification PK-70873-777 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Application Tooling Documents

Component Type

Electrical Model

Overview

Backplane Connectors

76560

Coplanar

TM-622018799

PCB Header

Yes

Impact™ Backplane Connector and Cable Assembly System

Product Name

UPC

Impact™

884982480674

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Guide to Mating Part

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Columns

Number of Pairs

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Stackable

Temperature Range - Operating

Termination Interface: Style

180

180

Black

200

No

94V-0

Yes

None

High Performance Alloy (HPA)

Gold

Tin

High Temperature Thermoplastic

25.523/g

10

6

18

Right Angle

1.20mm

No

Yes

1.00mm

Tray

1.90mm


1.90mm

0.762µm

No

-55°C to +85°C

Through Hole - Compliant Pin

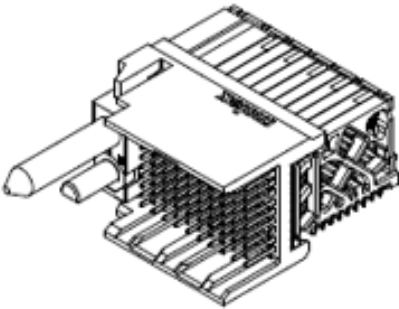

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/79/2015 (17

December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76560 Series

Mates With

76150 Impact™ 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Daughter Card

Signal Module

Assembly Press-In

Tool for 6-Pair by 10-Column Assemblies

0622018661

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990, AS-76060-9999
Electrical Model Document	EE-76560-0001
Packaging Specification	PK-70873-777
Product Specification	PS-76060-999
S-Parameter Model	SP-76560-0001, SP-76560-002
Sales Drawing	SD-76560-9002
Symbol/Footprint Data	SYM-76560-3108

Impact™ Right Angle0622024350
Module Removal
Tool (RAM)

This document was generated on 06/09/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION