


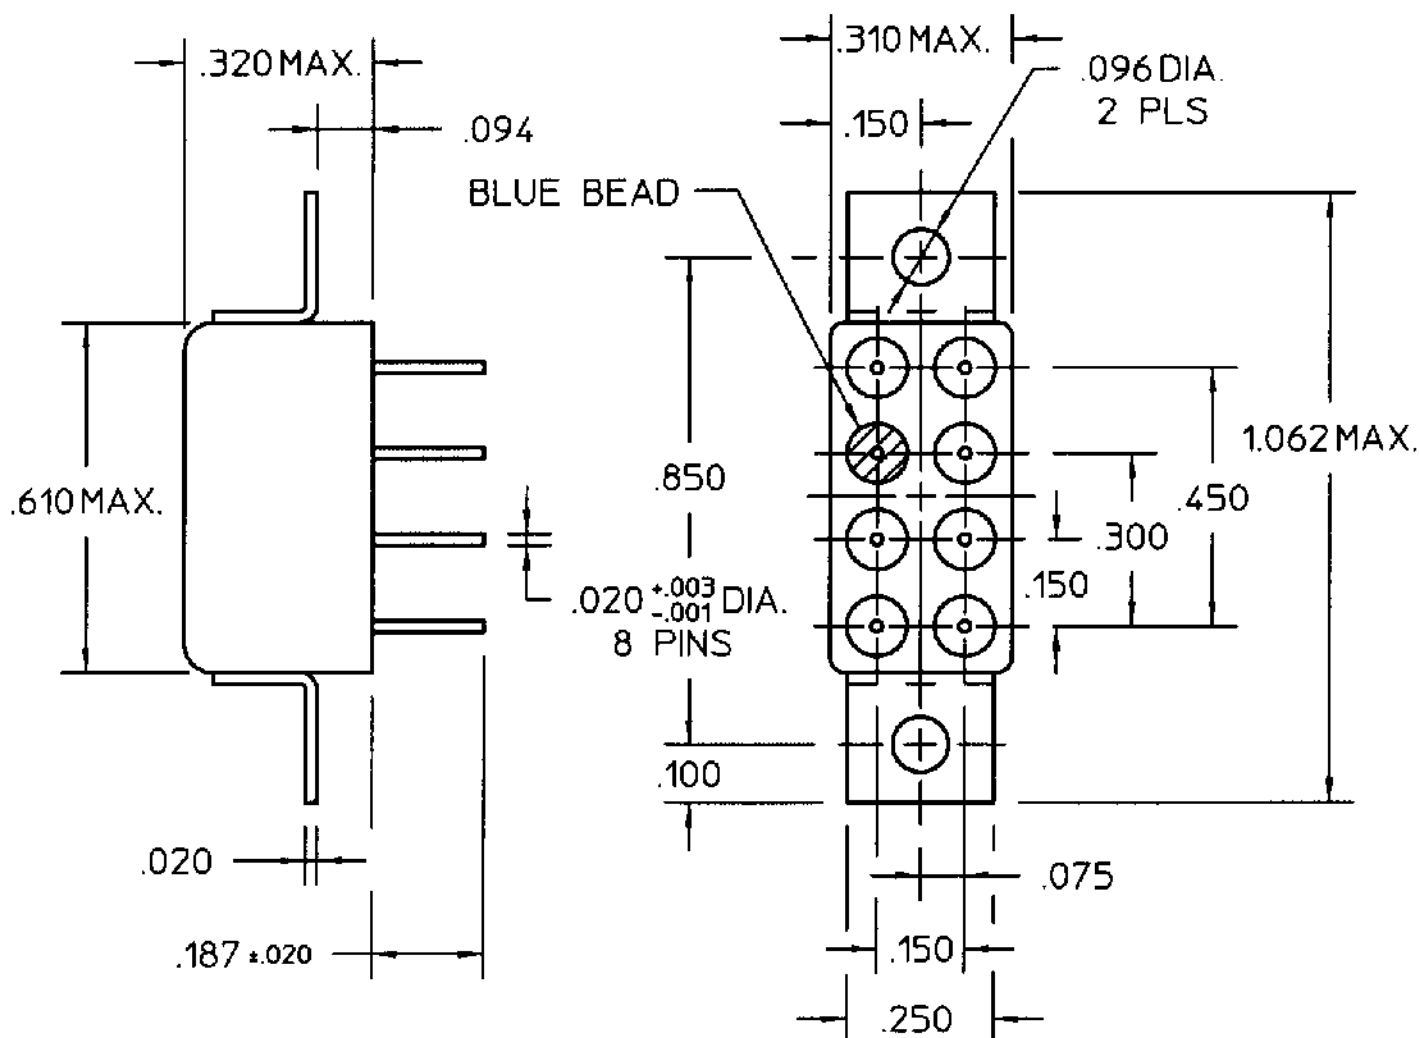

REV. 0

DCO 141491

TOL ± .010 UNLESS OTHERWISE SPECIFIED


COIL: @ 25°C
 RESISTANCE 1350 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
 RELEASE 6 MS MAX.
 CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

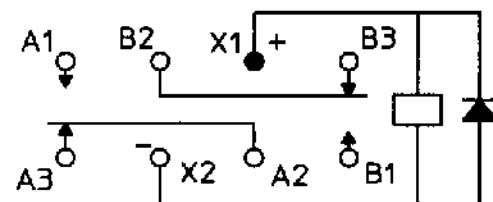

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 50,000 OPERATIONS

DR. B.D. 11/8/99 CK. *[Signature]*

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/37-025P REV.

'3SBC' RELAY

3SBC2095A2