


1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 KAPTON VACUUM PICK UP BUTTON.

6 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

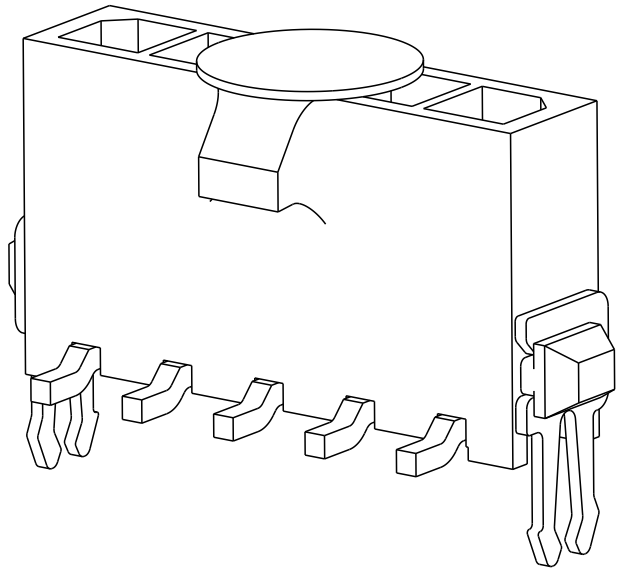

SUPERSEDED BY 3-1445095-2
SUPERSEDED BY 3-1445095-1
SUPERSEDED BY 3-1445095-0
SUPERSEDED BY 2-1445095-9
SUPERSEDED BY 2-1445095-8
SUPERSEDED BY 2-1445095-7
SUPERSEDED BY 2-1445095-6
SUPERSEDED BY 2-1445095-5
SUPERSEDED BY 2-1445095-4
SUPERSEDED BY 2-1445095-3
SUPERSEDED BY 2-1445095-2



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 090CT2000 CHK J. ROOT 20-FEB-2001 K. WHITAKER APVD 20-FEB-2001 C. JONES		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH		NAME VERTICAL SURF MOUNT HEADER ASSY, 30 MIC GOLD CONTACTS, THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	
MATERIAL 		SEE TABLE		CAGE CODE 00779	
				DRAWING NO C-1445095	
				RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 5:1 SHEET 1 OF 1 REV C	