

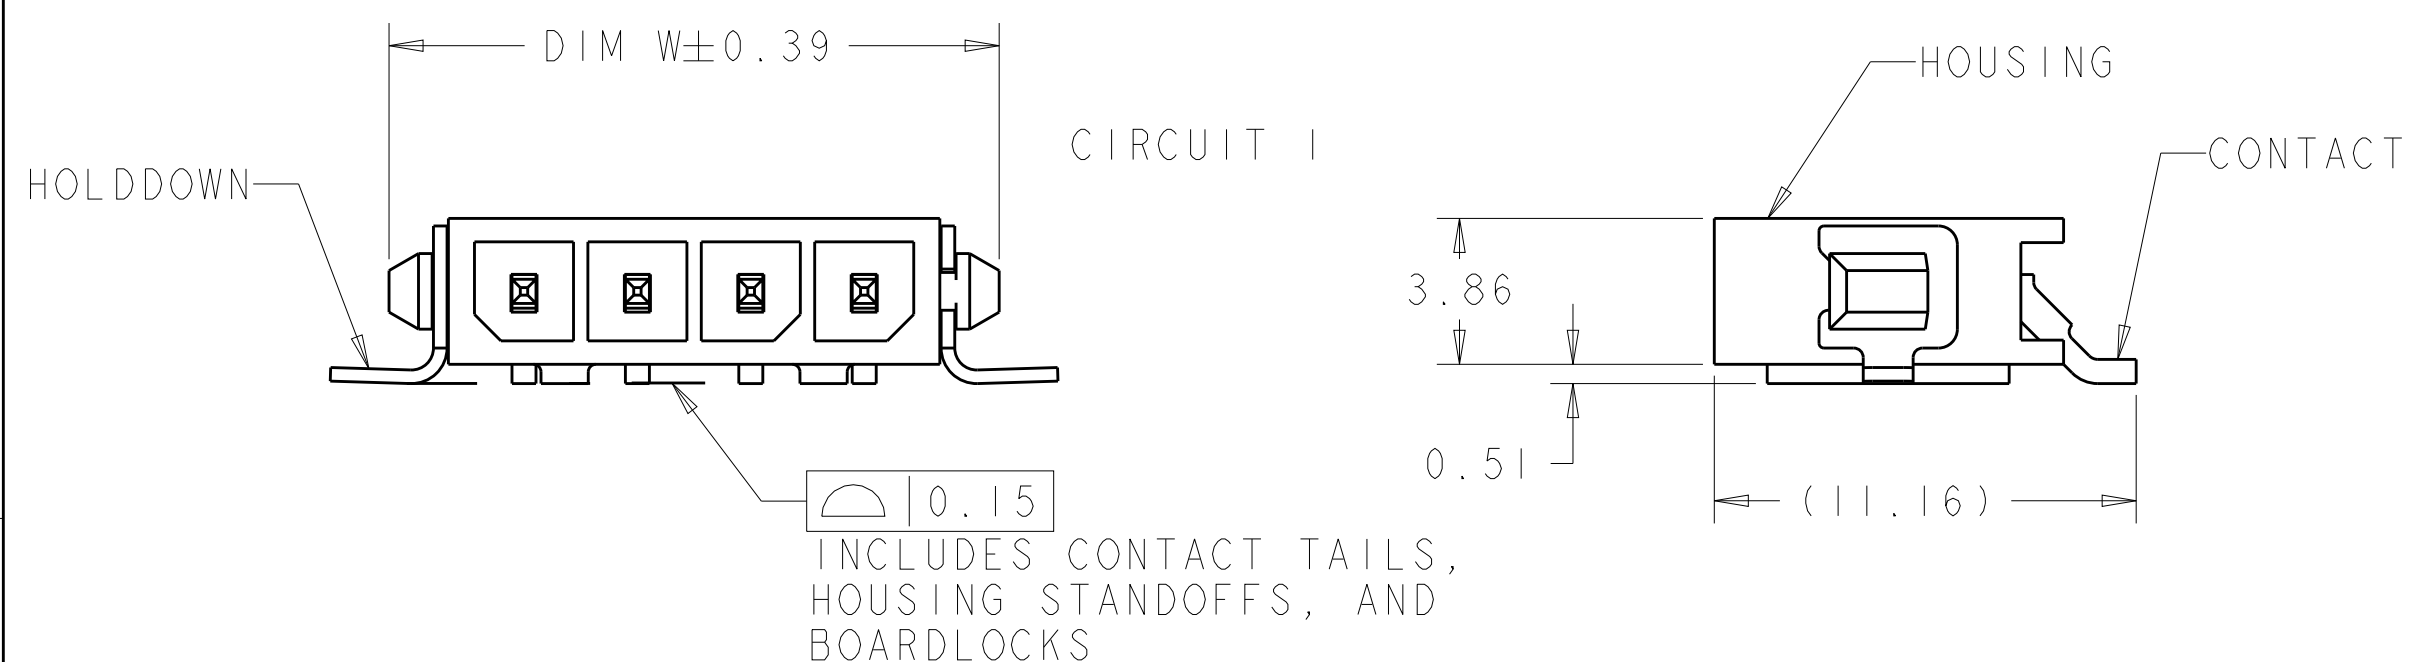



LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-005027	07MAY2011	RK	HMR
			A2	REVISED PER ECO-17-007352	10MAY2017	CX	DZ
			A3	REVISED PER ECR-17-012975	05SEP2017	JB	DZ

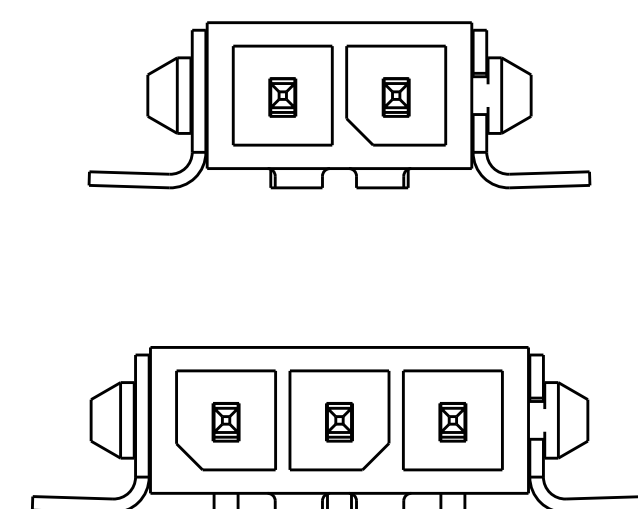

- ① MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON,
COLOR BLACK.
HOLDDOWNS - PHOSPHOR BRONZE.
- ② PLATING: CONTACTS - 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM
NICKEL. LEAD FREE PLATING.
HOLDDOWNS - 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM
NICKEL. LEAD FREE PLATING.
- ③ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ④ PLATING: CONTACTS - 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM
NICKEL. LEAD FREE PLATING .
0.762μm MINIMUM GOLD ON MATING END.
HOLDDOWNS - 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM
NICKEL. LEAD FREE PLATING.
- ⑤ PRELIMINARY DRAWING NOT RELEASED FOR PRODUCTION.

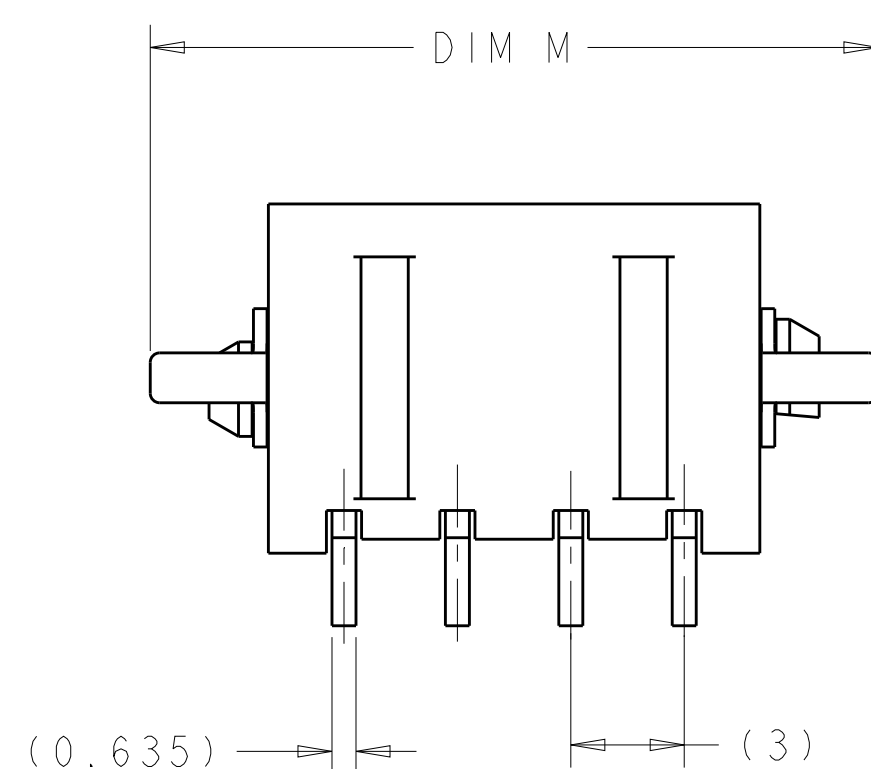

KEYING BY POSITION SIZE

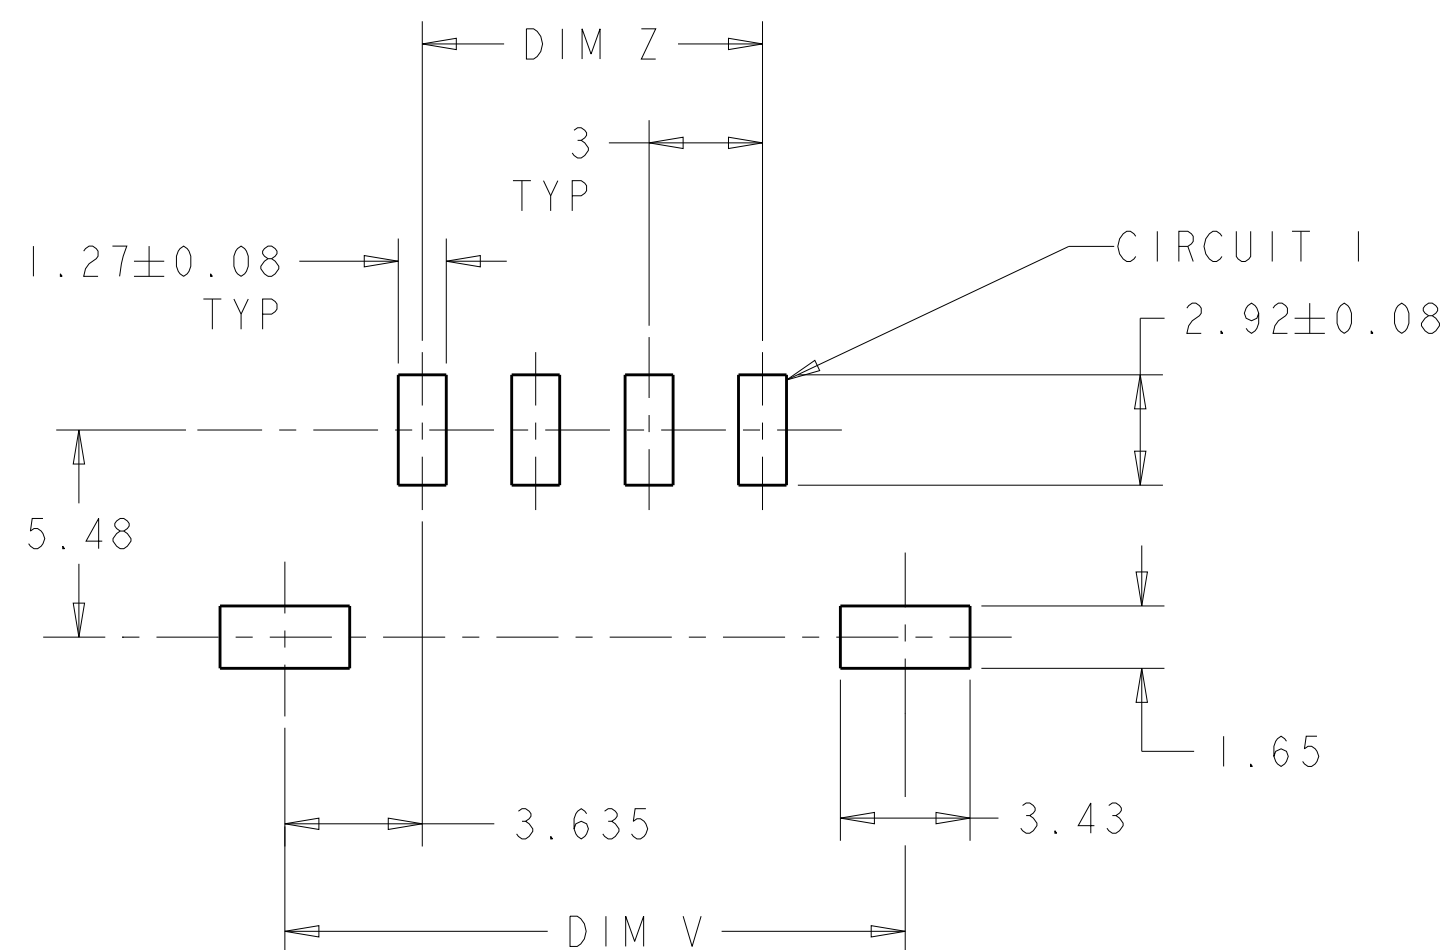PCB LAYOUT COMPONENT SIDE 

5	4	13.25	3	10	10.41	2	2-2029030-2
	4	13.25	3	10	10.41	2	1-2029030-2
	2	19.25	9	16	16.41	4	2029030-4
	2	16.25	6	13	13.41	3	2029030-3
	2	13.25	3	10	10.41	2	2029030-2
	FINISH	DIM M	DIM Z	DIM W	DIM V	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 27NOV2007 K. WHITAKER CHK 27NOV2007 C. JONES APVD 27NOV2007 C. JONES		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.13 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.13 4 PLC ±.1 ANGLES ±.1		NAME RT ANG SURF MNT HDR ASSY, SGL LATCH, TIN POSTS, SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK(TM)	
MATERIAL 		FINISH -		SIZE CAGE CODE DRAWING NO A200779 C-2029030	
WEIGHT -		RESTRICTED TO -		SCALE 5:1 SHEET OF REV A3	
CUSTOMER DRAWING					