


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECR-16-011494	20JUN2017	NK	CX


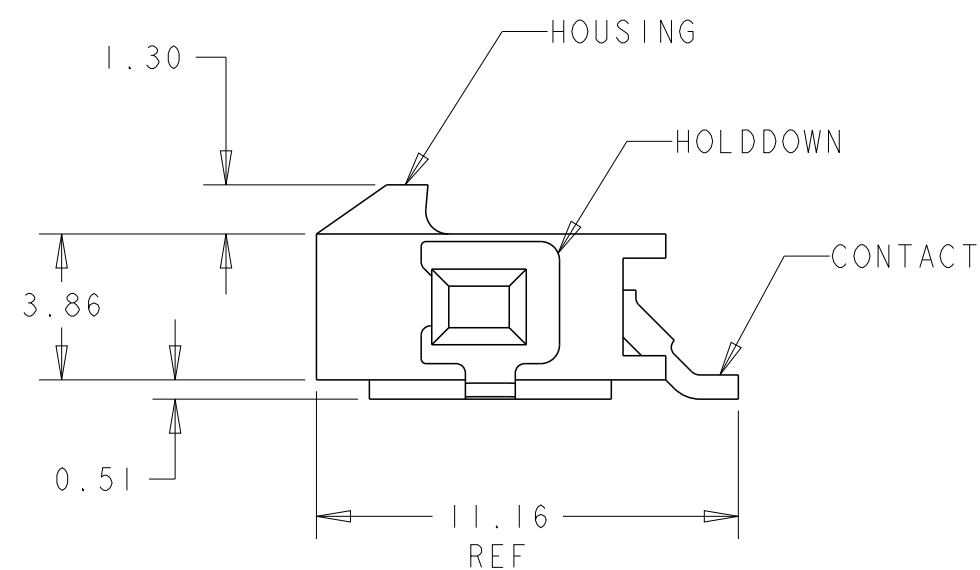


⚠ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.

2 PLATING: CONTACTS- 2.54μm MINIMUM TIN LEAD OVER 1.27μm MINIMUM NICKEL.
HOLD DOWNS- 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.

△ 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

5 PLATING: CONTACTS-2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.
HOLDDOWNS- 2.54μm MINIMUM TIN OVER 1.27μm MINIMUM NICKEL.

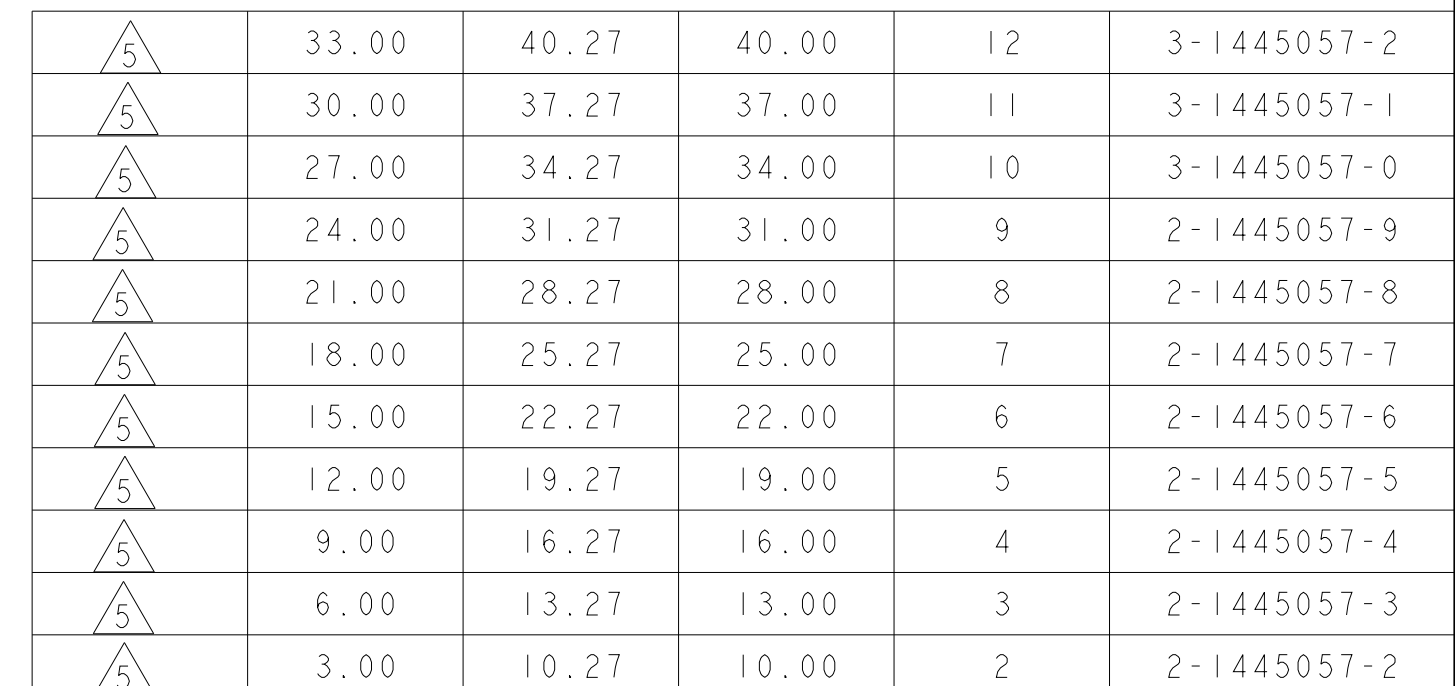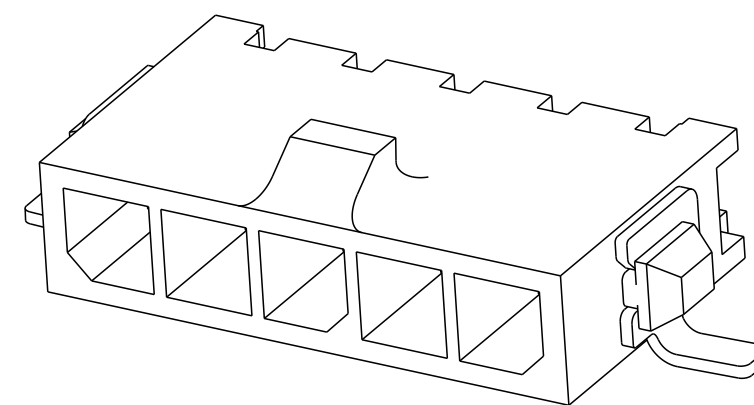

SUPERSEDED BY 3-1445057-2		33.00	40.27	40.00	12	1-1445057-2
SUPERSEDED BY 3-1445057-1		30.00	37.27	37.00	11	1-1445057-1
SUPERSEDED BY 3-1445057-0		27.00	34.27	34.00	10	1-1445057-0
SUPERSEDED BY 2-1445057-9		24.00	31.27	31.00	9	1-1445057-9
SUPERSEDED BY 2-1445057-8		21.00	28.27	28.00	8	1-1445057-8
SUPERSEDED BY 2-1445057-7		18.00	25.27	25.00	7	1-1445057-7
SUPERSEDED BY 2-1445057-6		15.00	22.27	22.00	6	1-1445057-6
SUPERSEDED BY 2-1445057-5		12.00	19.27	19.00	5	1-1445057-5
SUPERSEDED BY 2-1445057-4		9.00	16.27	16.00	4	1-1445057-4
SUPERSEDED BY 2-1445057-3		6.00	13.27	13.00	3	1-1445057-3
SUPERSEDED BY 2-1445057-2		3.00	10.27	10.00	2	1-1445057-2
	FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER

PCB LAYOUT COMPONENT SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03-OCT-2000 J. ROOT CHK 13-MAR-2001 K. WHITAKER APVD 13-MAR-2001 K. WHITAKER		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±		NAME RT ANGLE SURFACE MOUNT HEADER ASSY, TIN CONTACTS W/SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™	
MATERIAL		FINISH SEE TABLE		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1445057	
				RESTRICTED TO -	
				SCALE 5:1 SHEET 1 OF 1 REV C3	