

- 1

MATERIAL;
CONTACTS - BRASS.
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR; BLACK.
- 2





PLATING;
CONTACTS - 0.76µm MINIMUM GOLD OVER 2.54µm MINIMUM NICKEL
ON MATING AREA. 2.54µm TIN-LEAD MINIMUM OVER 2.54µm NICKEL
MINIMUM ON SOLDER TAILS.
- 3

DIMENSION APPLIES TO SOLDERTAIL SURFACES
AND STANDOFF SURFACES.
- 4

RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5


ALL SOLDERTAILS.
- 6

PLATING;
CONTACTS - 0.76µm MINIMUM GOLD OVER 2.54µm MINIMUM NICKEL
ON MATING AREA. 2.54µm MATTE TIN MINIMUM OVER 2.54µm NICKEL
MINIMUM ON SOLDER TAILS.

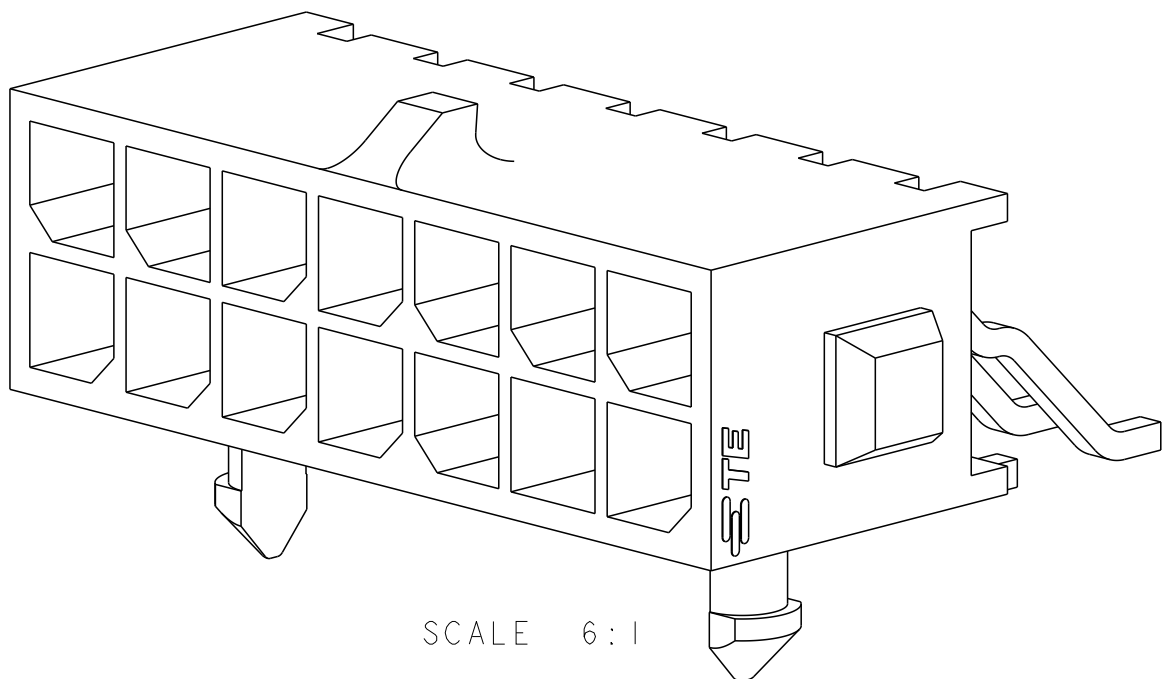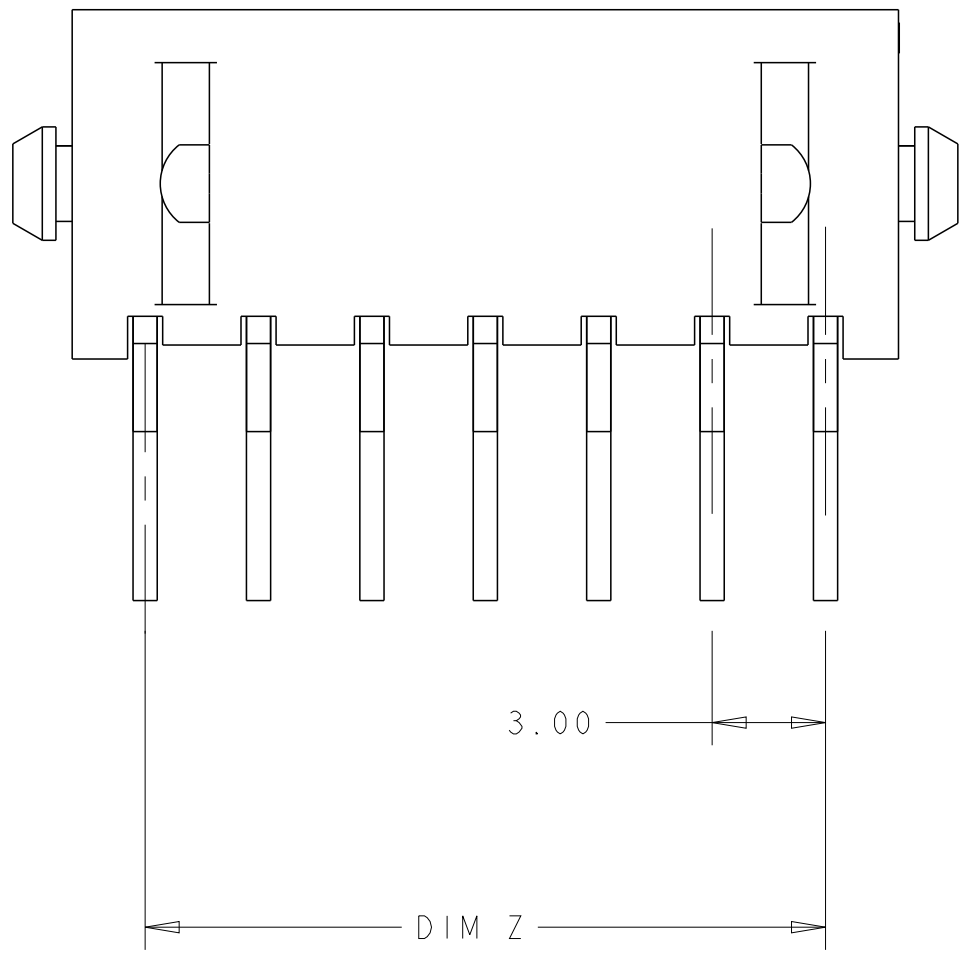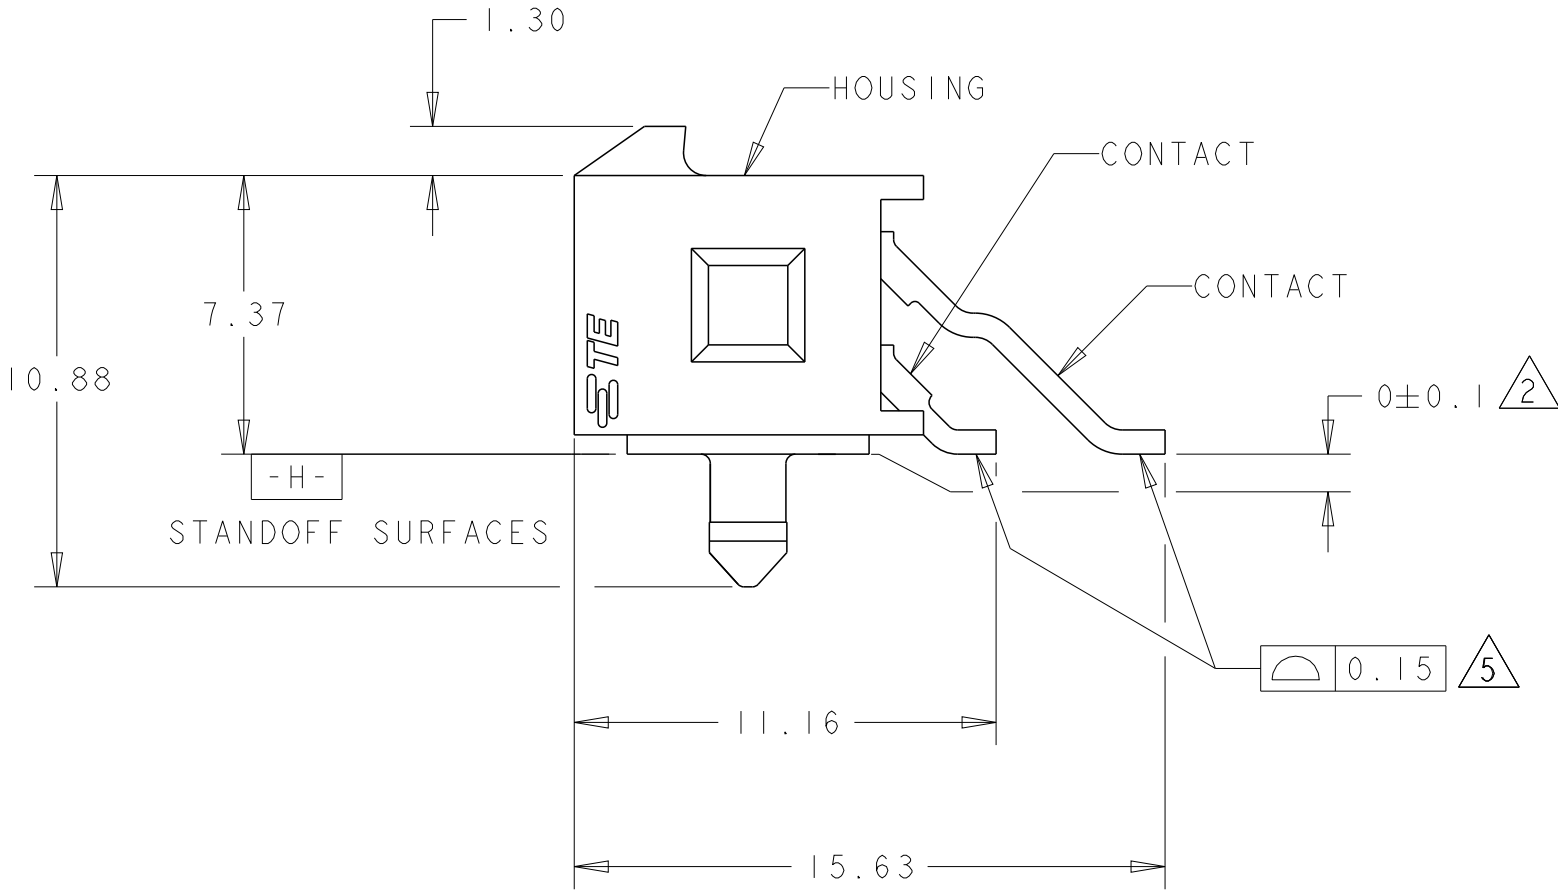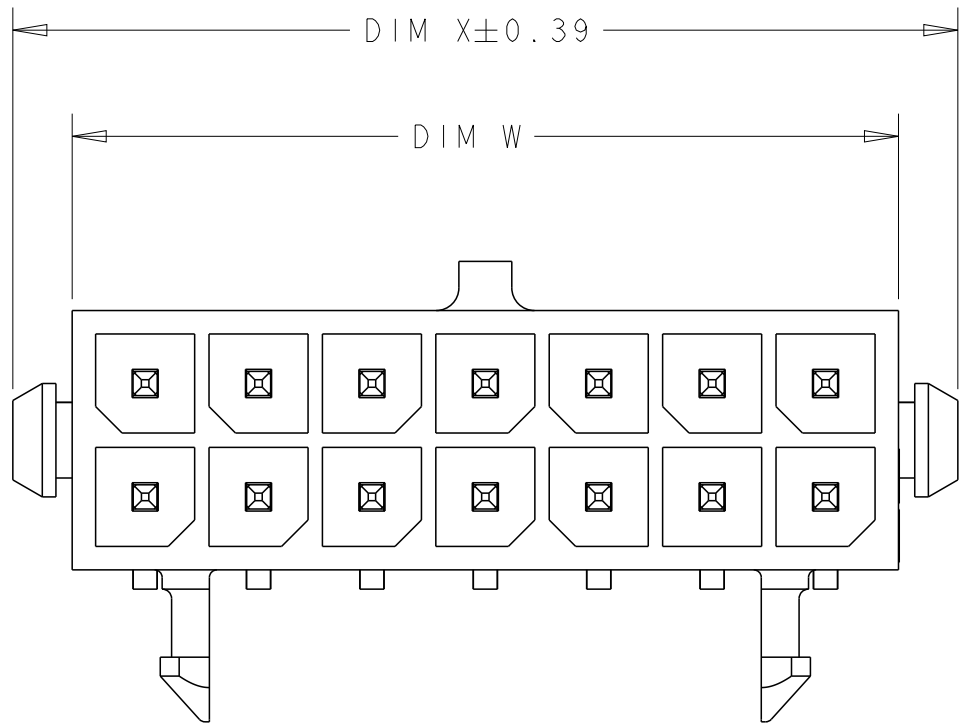

6	36.86	28.70	33.00	40.00	24	5-794623-4
6	33.86	25.70	30.00	37.00	22	5-794623-2
6	30.86	22.70	27.00	34.00	20	5-794623-0
6	27.86	19.70	24.00	31.00	18	4-794623-8
6	24.86	16.70	21.00	28.00	16	4-794623-6
6	21.86	13.70	18.00	25.00	14	4-794623-4
6	18.86	10.70	15.00	22.00	12	4-794623-2
6	15.86	7.70	12.00	19.00	10	4-794623-0
6	12.86	4.70	9.00	16.00	8	3-794623-8
6	9.86	-	6.00	13.00	6	3-794623-6
6	6.86	-	3.00	10.00	4	3-794623-4
6	3.86	-	-	7.00	2	3-794623-2

SUPERSEDED BY 5-794623-4	2	36.86	28.70	33.00	40.00	24	2-794623-4
SUPERSEDED BY 5-794623-2	2	33.86	25.70	30.00	37.00	22	2-794623-2
SUPERSEDED BY 5-794623-0	2	30.86	22.70	27.00	34.00	20	2-794623-0
SUPERSEDED BY 4-794623-8	2	27.86	19.70	24.00	31.00	18	1-794623-8
SUPERSEDED BY 4-794623-6	2	24.86	16.70	21.00	28.00	16	1-794623-6
SUPERSEDED BY 4-794623-4	2	21.86	13.70	18.00	25.00	14	1-794623-4
SUPERSEDED BY 4-794623-2	2	18.86	10.70	15.00	22.00	12	1-794623-2
SUPERSEDED BY 4-794623-0	2	15.86	7.70	12.00	19.00	10	1-794623-0
SUPERSEDED BY 3-794623-8	2	12.86	4.70	9.00	16.00	8	794623-8
SUPERSEDED BY 3-794623-6	2	9.86	-	6.00	13.00	6	794623-6
SUPERSEDED BY 3-794623-4	2	6.86	-	3.00	10.00	4	794623-4
SUPERSEDED BY 3-794623-2	2	3.86	-	-	7.00	2	794623-2

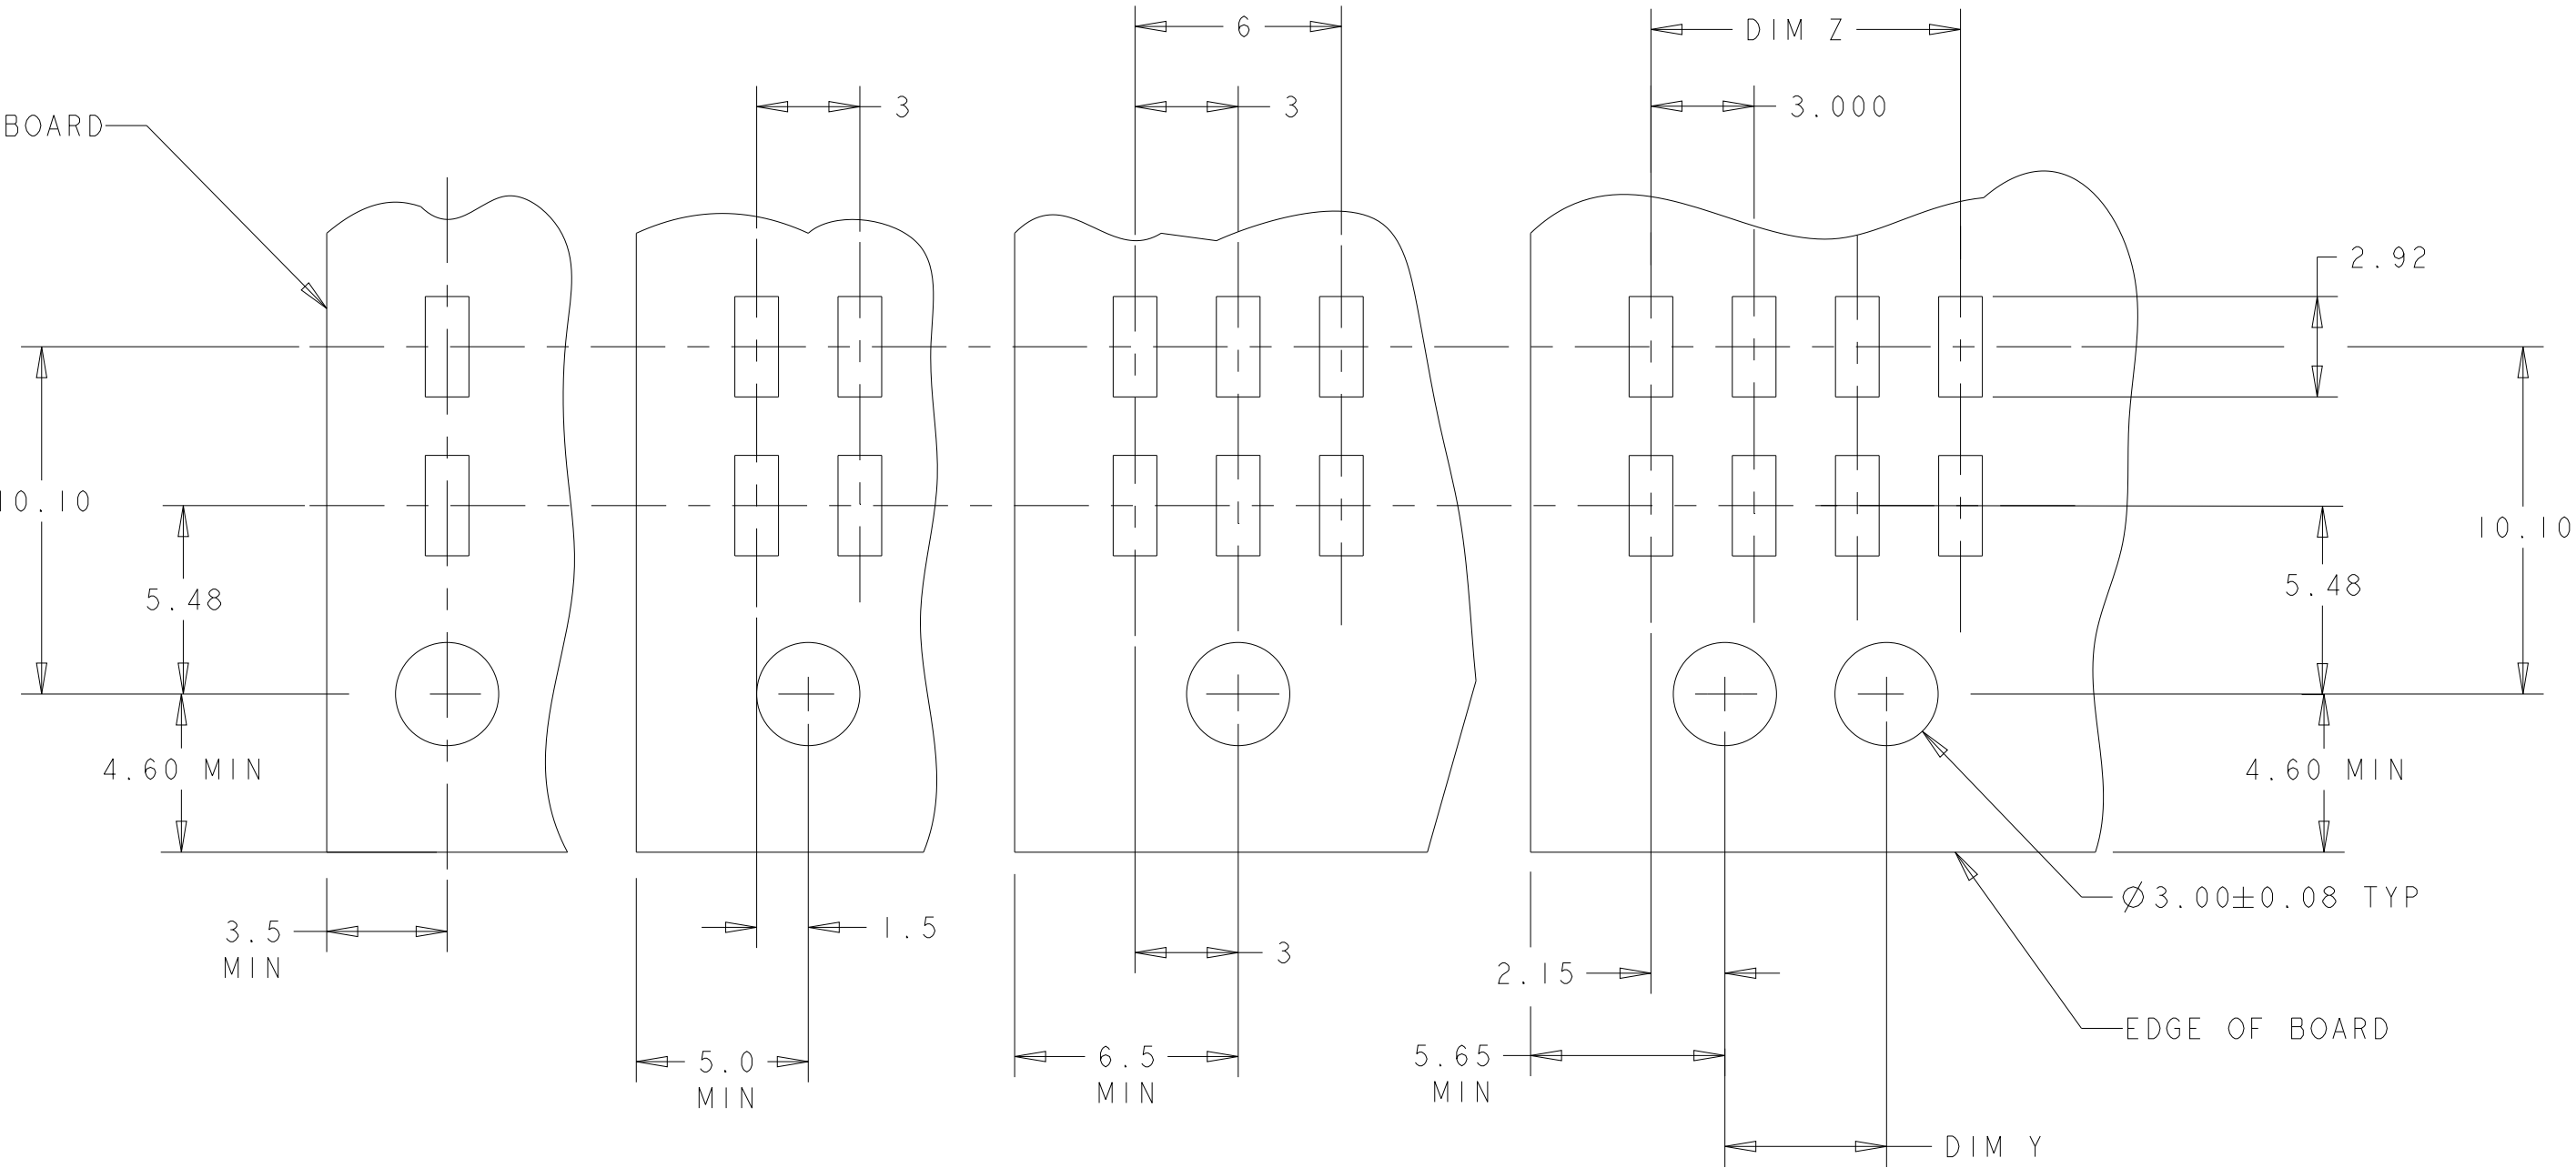

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK C. JONES APVD C. JONES	28-JAN-2002 28-JAN-2002 28-JAN-2002	NAME SURFACE MOUNT, R/A, 30 GOLD HEADER, PLASTIC BOARDLOCK, DUAL ROW, MICRO MATE-N-LOK TM	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH	PRODUCT SPEC APPLICATION SPEC	SIZE A1	CAGE CODE -	DRAWING NO. C=794623
MATERIAL SEE TABLE	WEIGHT -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1	REV G1