

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1724520006](#)  
**Status:** **Active**  
**Overview:** [EXTreme Ten60Power High-Current Connector](#)  
**Description:** [EXTreme Ten60Power Wire-to-Board Right-Angle Plug Assembly, 6 Power Circuits](#)

**Documents:**

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-172452-0001 \(PDF\)](#) [Product Literature \(PDF\)](#)  
[Product Specification PS-173693-001-001 \(PDF\)](#)

**Agency Certification**


CSA LR19980

**General**

Product Family PCB Headers  
 Series [172452](#)  
 Application Power, Wire-to-Board  
 CURRENT-MAX-NUMERIC 50.0  
 Overview [EXTreme Ten60Power High-Current Connector](#)  
 PITCH-MATING-NUMERIC 7.50  
 Product Literature Order No 987650-1981  
 Product Name EXTreme Ten60Power  
 UPC 889056069465

**Physical**

(p)ower-(s)ignal Configuration 6p - 0s  
 Breakaway No  
 Circuits (Loaded) 6  
 Circuits (maximum) 6  
 Color - Resin Black  
 Durability (mating cycles max) 200  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Metal Copper Alloy  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin Liquid Crystal Polymer  
 Net Weight 23.350/g  
 Number of Rows 1  
 Orientation Right Angle  
 PC Tail Length 2.84mm  
 PCB Retention Yes  
 Packaging Type Tray  
 Pitch - Mating Interface 7.50mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 2.540µm  
 Polarized to Mating Part Yes  
 Polarized to PCB Yes  
 Shrouded No  
 Stackable No  
 Surface Mount Compatible (SMC) No  
 Temperature Range - Operating -40° to +105°C  
 Termination Interface: Style Through Hole

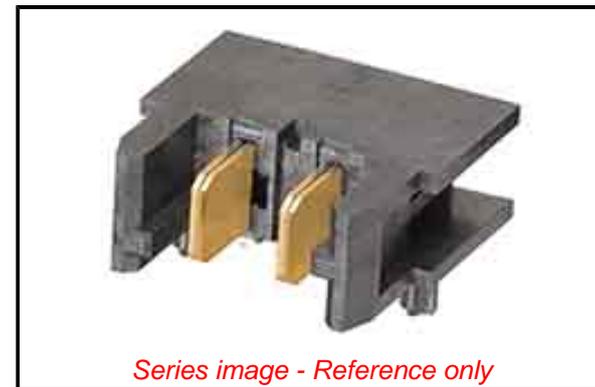

*Series image - Reference only*

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

**Search Parts in this Series**

[172452 Series](#)

**Mates With**

[EXTreme Ten60Power Receptacle Housing 172509](#)

**Electrical**

Current - Maximum per Contact  
Voltage - Maximum

50.0A  
600V AC

**Material Info****Reference - Drawing Numbers**

Product Specification  
Sales Drawing  
Symbol/Footprint Data

PS-172452-0001, PS-173693-001-001  
SD-172452-0001  
SYM-172452-0006

This document was generated on 09/25/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**