



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/01/19	Jessie	Form Rev.02 To A
B	LEN-040145	2010/04/16	Jessie	Modify Pin Plated
C	LE3-060084	2010/05/25	Jessie	Modify Note and Shell Plated

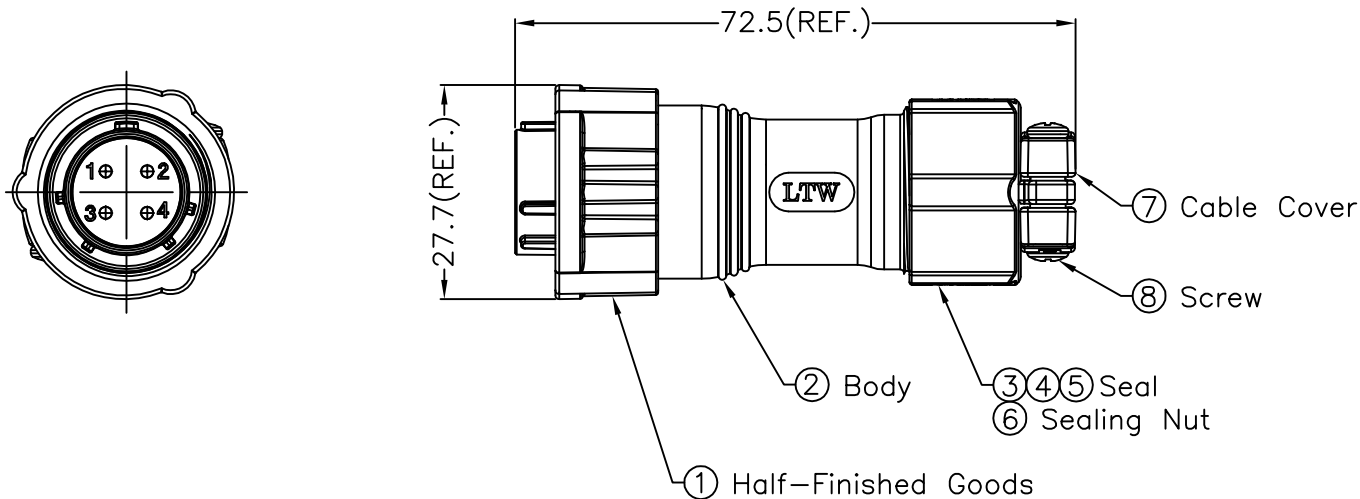

Note:

* Ⓢ Important Dimension.

* Waterproof Rate: IP68.

⚠ IP68: 1M depth of water in 24 Hrs.
(防水等級：IP68)

IP68：水深一米測試 24 小時。

* Cable OD: $\phi 5.5\text{mm} \sim \phi 12.5\text{mm}$.



* Gasket: Silicone ,Gray.

⚠ * Shell: Zinc Alloy ,Ni Plated ,Silver.

⚠ * Male Pin: Copper Alloy ,Silver Plated.

* Insulation: Nylon ,Black.

⚠ ⑨ * One Set Assembled in one PE Bag.

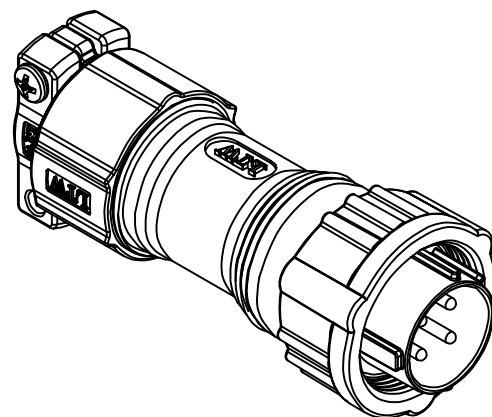

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Circular II Series 4 Pin Assy			
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
Ⓢ :Inspection Item			

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO LB20-04BFMA-SL8001	DRAWN BY Jessie	DATE 2010/05/25
DWG NO LB20-04BFMA-SL8001	CHECKED BY Jimmy	DATE 2010/05/27
CUSTOMER ALTW	APPROVED BY Win	DATE 2010/06/01