REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880177~180	2008/03/12	Zhang Jin	Add Cross.

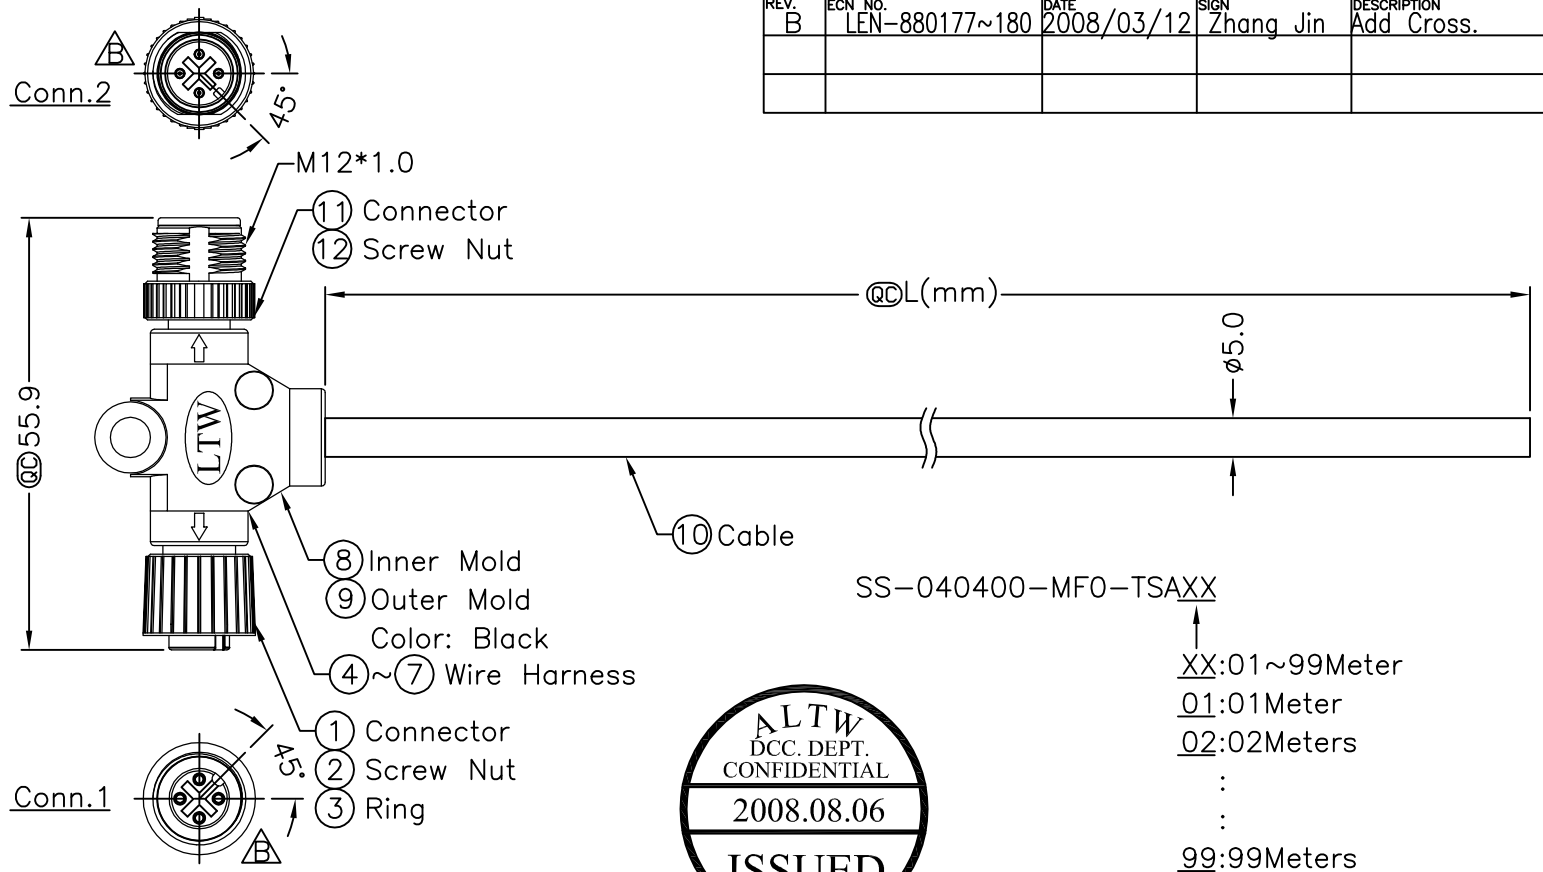

ALTW CONFIDENTIAL
2008.03.12
R&D DEPT.

ALTW DCC. DEPT. CONFIDENTIAL
2008.08.06
ISSUED

SS-040400-MF0-TSAXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:
* QC Important Dimension.
* Waterproof Rate: IP68
* Housing: Black, PU
* Male & Female Pin: Copper Alloy, Gold Plated
* Wire Harness: UL1007 24AWG, 4Pcs.
* Cable: UL2464 22AWG*4C+Talc Black, PVC Jacket UV Resistant OD=5.0mm
* Cable Length Tolerance: 1M~10M±5%mm, 11M~99±500mm.



Conn.1
Pin Assignments
Front View



Conn.2
Pin Assignments
Front View

Conn.1	Wire Color		Conn.2
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1

Pin Out

UNIT:mm	TITLE: M12 Conn T Cable Screw MF Conn MF Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY: Cloud	DATE: 2008/06/14
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1		DWG NO: SS-040400-MF0-TSAXX	CHECKED BY: Doreen	DATE: 2008/07/04
	REV.: B / SIZE: A4 / QC :Inspection Item		CUSTOMER: ALTW	APPROVED BY: Luke	DATE: 2008/07/04

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.