


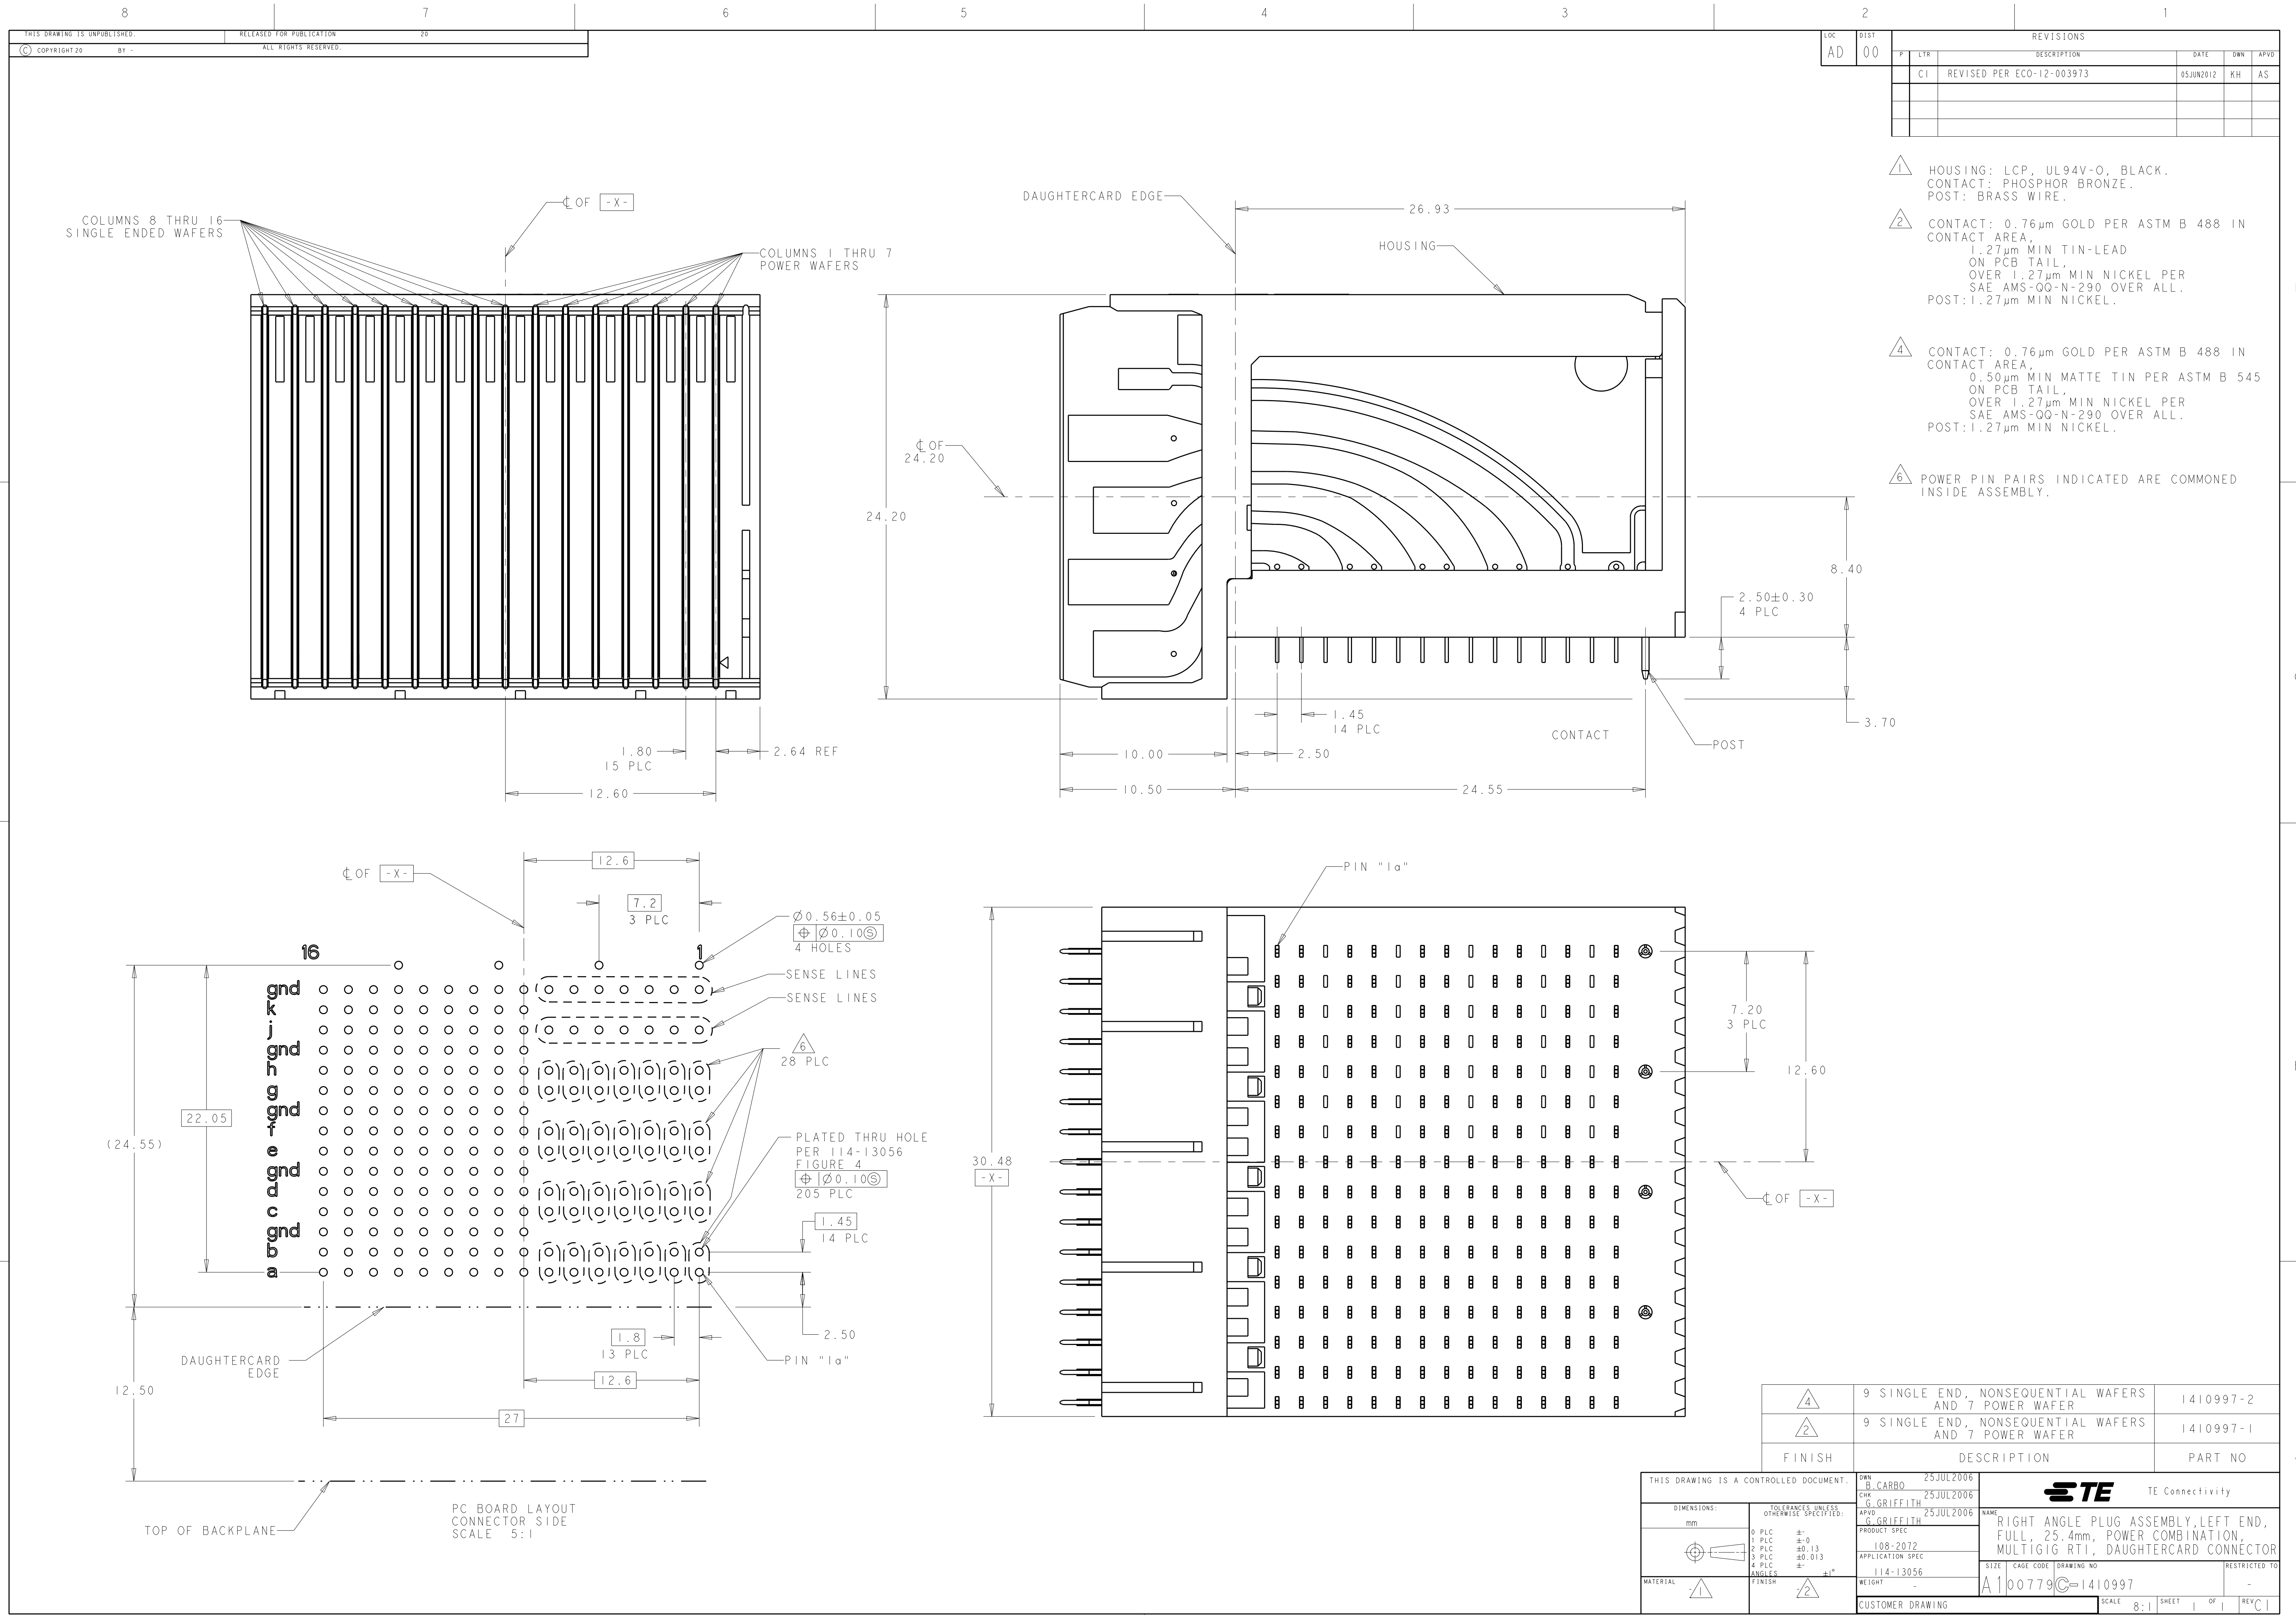

LOC		DIST		REVISIONS				
AD	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
			C1	REVISED PER ECO-12-003973	05JUN2012	KH	AS	

- 1


HOUSING: LCP, UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- 2

CONTACT: 0.76µm GOLD PER ASTM B 488 IN CONTACT AREA,
1.27µm MIN TIN-LEAD
ON PCB TAIL,
OVER 1.27µm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST: 1.27µm MIN NICKEL.
- 4

CONTACT: 0.76µm GOLD PER ASTM B 488 IN CONTACT AREA,
0.50µm MIN MATTE TIN PER ASTM B 545
ON PCB TAIL,
OVER 1.27µm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST: 1.27µm MIN NICKEL.
- 6

POWER PIN PAIRS INDICATED ARE COMMONED INSIDE ASSEMBLY.

4	9 SINGLE END, NONSEQUENTIAL WAFERS AND 7 POWER WAFER	1410997-2
2	9 SINGLE END, NONSEQUENTIAL WAFERS AND 7 POWER WAFER	1410997-1
FINISH	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 25JUL2006	 TE Connectivity	
DIMENSIONS:		CHK G. GRIFFITH 25JUL2006		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD G. GRIFFITH 25JUL2006	NAME	RIGHT ANGLE PLUG ASSEMBLY, LEFT END, FULL, 25.4mm, POWER COMBINATION, MULTIGIG RTI, DAUGHTERCARD CONNECTOR
	9 PLC ±0	PRODUCT SPEC	SIZE	114-13056
	1 PLC ±0.13	APPLICATION SPEC	WEIGHT	-
MATERIAL	5 PLC ±0.013	114-13056	CAGE CODE	A100779
1	4 PLC ±1°	114-13056	DRAWING NO	C=1410997
2	FINISH	114-13056	CUSTOMER DRAWING	SCALE 8:1 SHEET 1 OF 1 REV C1