
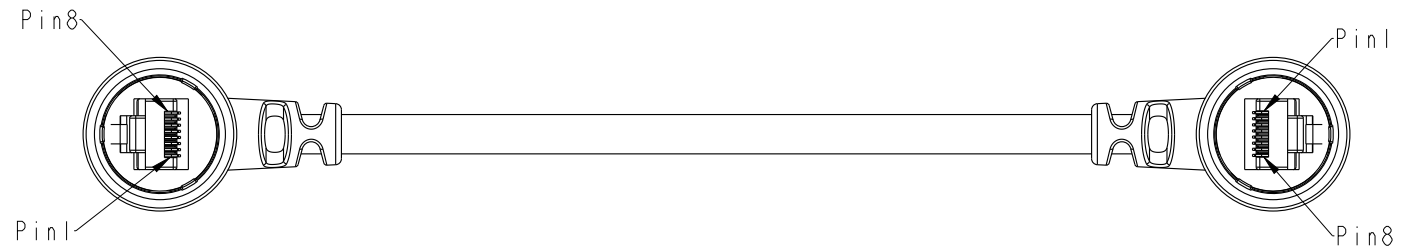
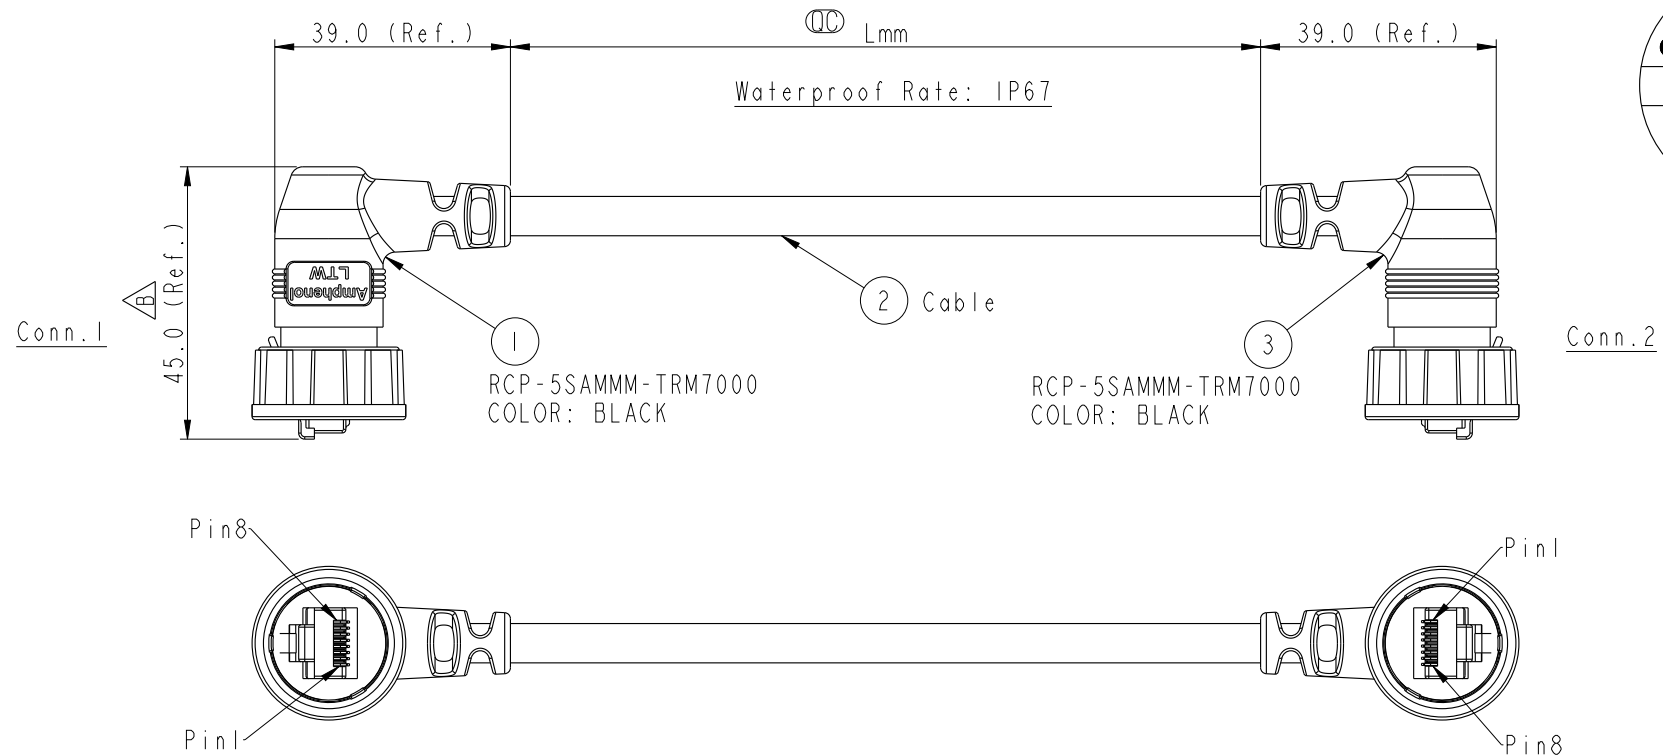


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191395	2019/07/29	JC Chen	Dimensional tolerance change



RCP5SM-RCP5SM-TR7B XX
XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters
Cable Length(L): 01~99Meters

- Note:
- * (QC) Important Dimension to Check
 - * Waterproof Rate: IP67 (Mating)
 - * Housing: Nylon+GF, Black
 - * Lock Nut: Nylon+GF, Black
 - * RJ Plug: Shield, Phosphor Bronze, Gold Plated
 - * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
11M~30M: ±200mm
31M~99M: ±500mm

Shield	Drain Wire	Shield
8	Brown 棕	8
7	White/Brown 白/棕	7
6	Green 綠	6
5	White/Blue 白/藍	5
4	Blue 藍	4
3	White/Green 白/綠	3
2	Orange 橘	2
1	White/Orange 白/橘	1
Conn.1	Wire Color	Conn.2

UNIT:mm		TITLE
TOLERANCE		RJ DOUBLE-90 ENDED, WITH CONN 3KEY LOCK
.X ±0.25		SCALE 4:5
.XX ±0.1		SIZE A4
.XXX ±0.05		SHEET 1 OF 1
ANGLES ±1°		REV. B
		WC-REV. A.2
		(QC): Inspection item

ITEM NO	DRAWN BY	DATE
DWG NO	JC Chen	2019-07-29
RCP5SM-RCP5SM-TR7BXX	Li Feng	2019-07-29
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019-07-29