

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0545501871](#)
Status: **Active**
Overview: [ffc_fpc_smt](#)
Description: 0.50mm (.020") Pitch FFC/FPC Connector, 1.20mm (.047") Height, Right Angle, SMT, ZIF, Top Contact Style, 18 Circuits, Gold (Au) Contact Plating

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-54550-012 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	FFC/FPC Connectors
Series	54550
Overview	ffc_fpc_smt
Product Name	N/A

Physical

Circuits (Loaded)	18
Contact Position	Top
Durability (mating cycles max)	20
Entry Angle	90° Angle
Mated Height (in)	0.047 In
Mated Height (mm)	1.20 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.020 In
Pitch - Mating Interface (mm)	0.50 mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FFC/FPC


Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V

Material Info

Reference - Drawing Numbers

Packaging Specification	SPK-54550-056
Product Specification	PS-54550-012, RPS-54550-078, RPS-54550-080, RPS-54550-083, RPS-54550-088, RPS-54550-089, RPS-54550-090
Sales Drawing	SD-54550-042, SD-54550-043

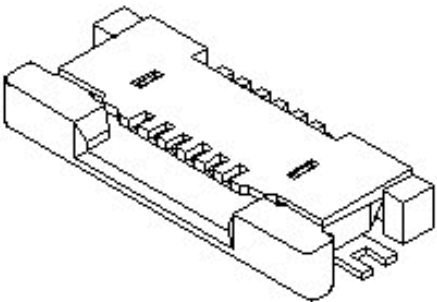

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS





**Need more information on product
environmental compliance?**


Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.


Search Parts in this Series
[54550Series](#)

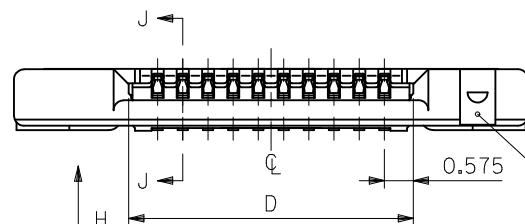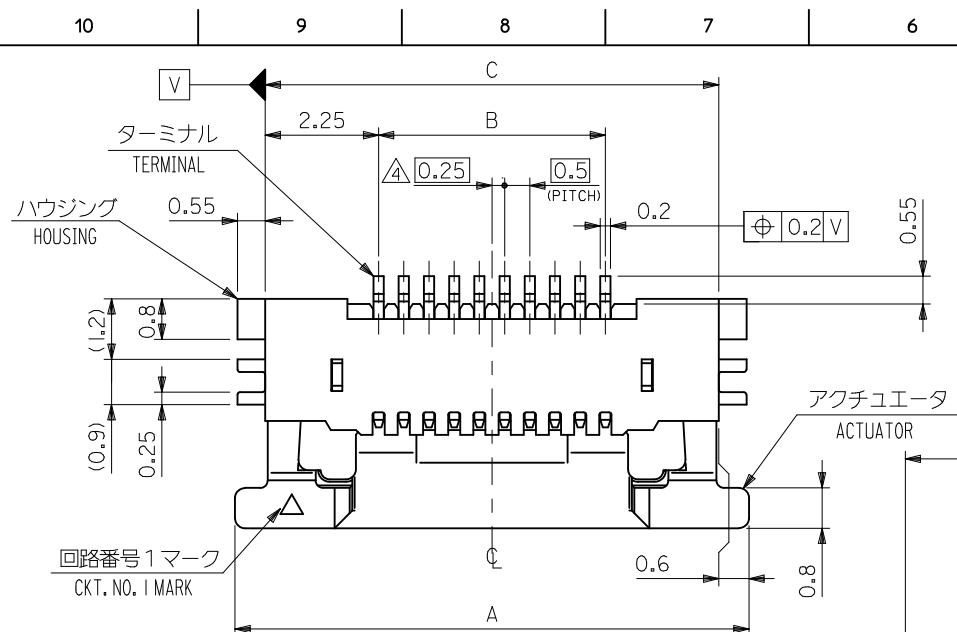


△6 ゲート部
GATE PART



VIEW H

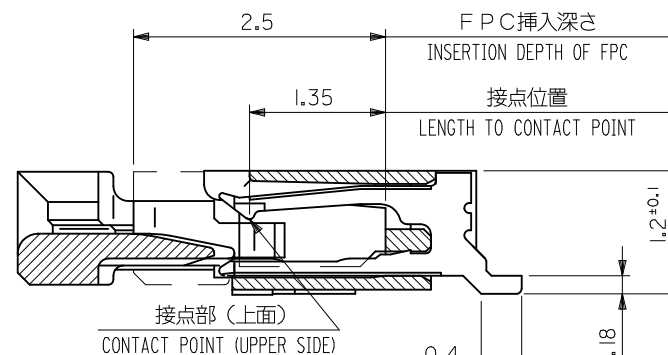


SECT. J-J
SCALE 20:1

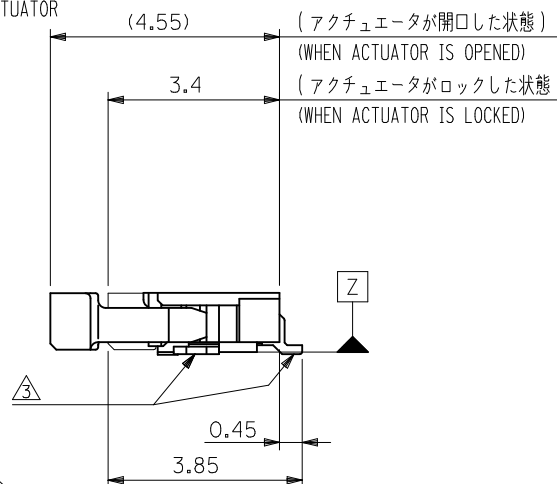

0.3 ^{+0.03}	13.65	17	12.5	18.2	54550-2671	26
	12.65	16	11.5	17.2	54550-2471	24
	11.65	15	10.5	16.2	54550-2271	22
	11.15	14.5	10	15.7	54550-2171	21
	10.65	14	9.5	15.2	54550-2071	20
	10.15	13.5	9	14.7	54550-1971	19
	9.65	13	8.5	14.2	54550-1871	18
	9.15	12.5	8	13.7	54550-1771	17
	8.65	12	7.5	13.2	54550-1671	16
	7.65	11	6.5	12.2	54550-1471	14
	7.15	10.5	6	11.7	54550-1371	13
	6.65	10	5.5	11.2	54550-1271	12
	6.15	9.5	5	10.7	54550-1171	11
	5.65	9	4.5	10.2	54550-1071	10
	5.15	8.5	4	9.7	54550-0971	9
	4.65	8	3.5	9.2	54550-0871	8
	4.15	7.5	3	8.7	54550-0771	7
	3.65	7	2.5	8.2	54550-0671	6
3.15	6.5	2	7.7	54550-0571	5	
2.65	6	1.5	7.2	54550-0471	4	
THICKNESS OF FPC	D	C	B	A	EMBOSSED TAPE	極数
					ORDER No. オーダー番号	Ck+


CONNECTOR SERIES NO. 54550-**-29

REVISED EC NO: J2010-1202 DFWN: TONO CHKD: ISHIMOTO APPR: KIMORI KAWA	DESCRIPTION 2009/12/11 2009/12/11 2009/12/14	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	CONNECTION SERIES NO. 34550-4*29		THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY M. NINOMIYA	DATE 2004/02/12	TITLE 0.5 FPC CONN. HSG ASSY FOR SMT RA U/CONTACT				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE 2004/02/12					
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2004/02/12	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-54550-042		1 OF 2			
M	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

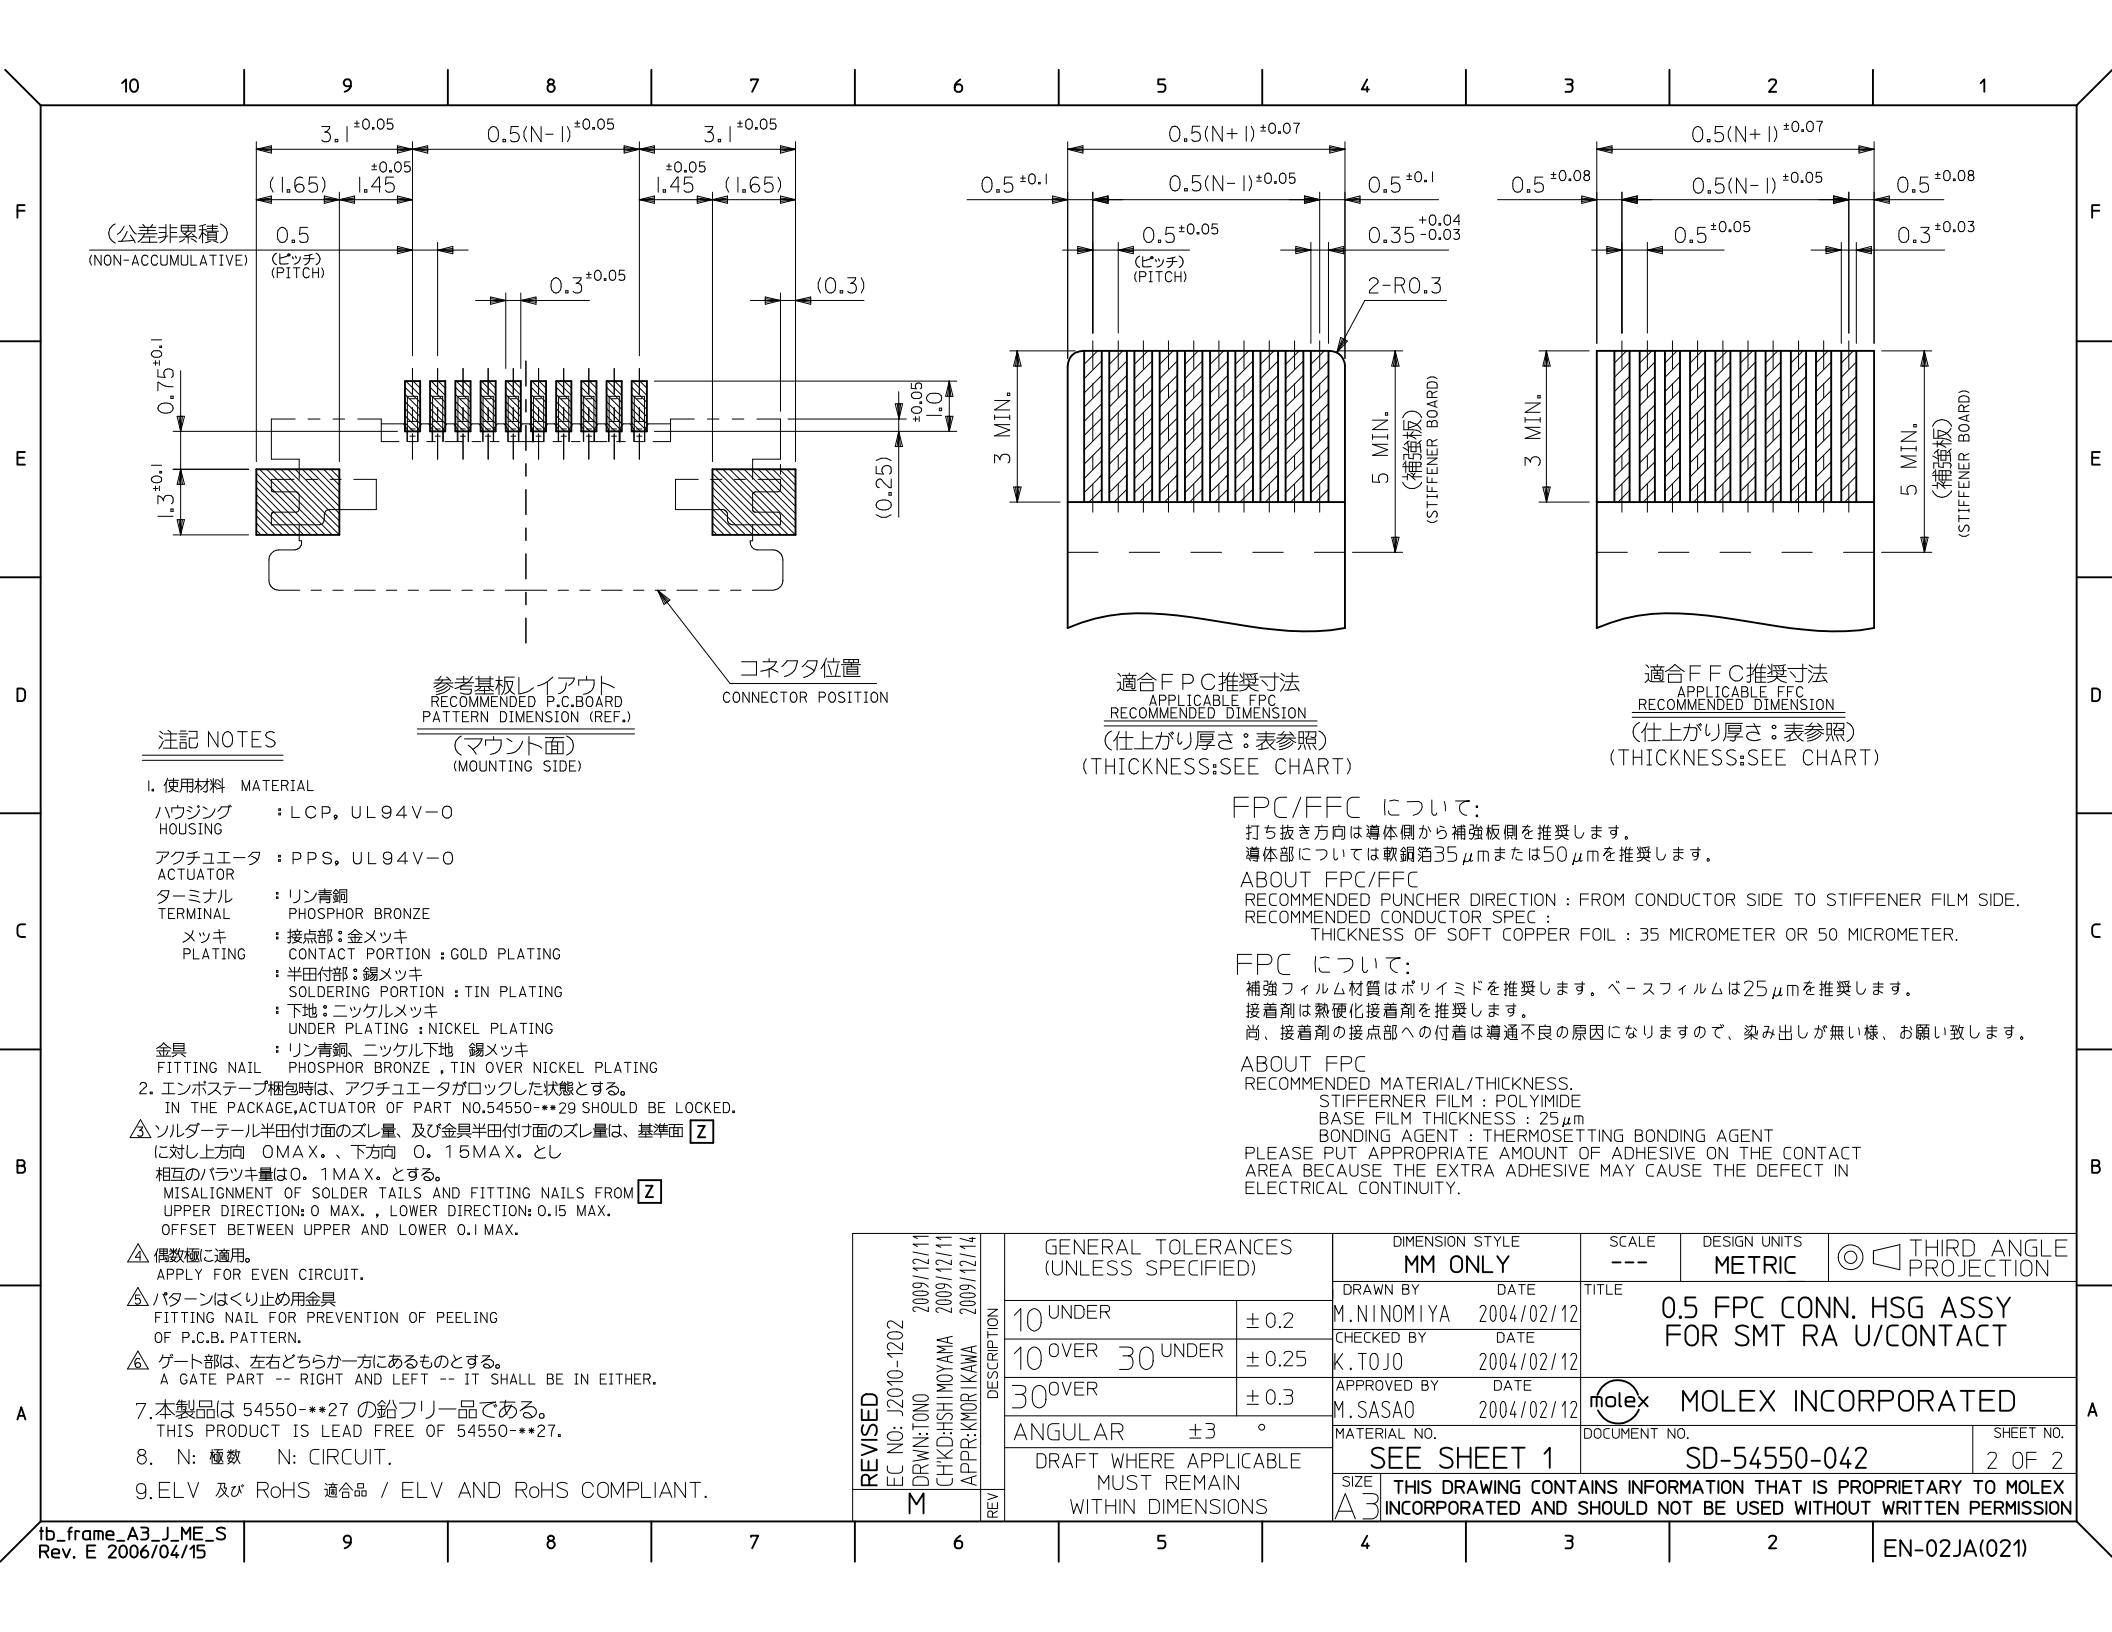

NOTES

- 製品詳細寸法については図面 SD-54550-042 を参照下さい。
RE DETAILED DIMENSION, SEE SD-54550-042.
- 梱包数量：3000個/リール
NUMBER OF CONNECTORS : 3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

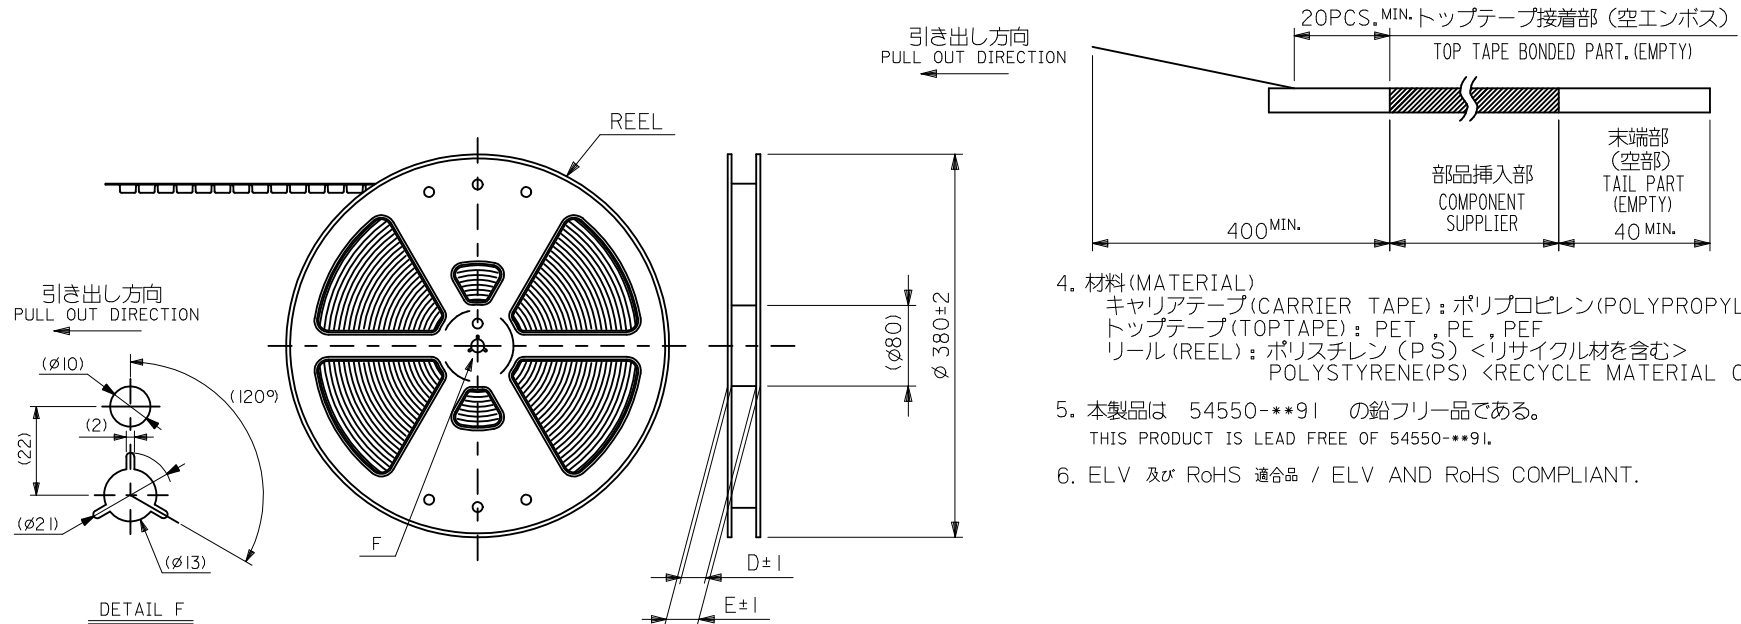


- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET , PE , PEF
リール (REEL) : ポリスチレン (P.S) <リサイクル材を含む>
POLYSTYRENE (P.S) <RECYCLE MATERIAL CONTAINED>
- 本製品は 54550-**9I の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 54550-**9I.
- ELV 及び RoHS 適合品 / ELV AND RoHS COMPLIANT.



REVISED	EC NO: J2010-1202 DRWN: TONO CHKD: SHIMOMIYAMA APPR: KMORI KAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION				
			10 UNDER	± 0.2	M. NINOMIYA	2004/02/12	TITLE EMBSTP PKG FOR 0.5 FPC CONN ZIF UPR CONT						
			10 OVER 30 UNDER	± 0.25	K. TOJO	2004/02/12							
			30 OVER	± 0.3	M. SASAO	2004/02/12	 MOLEX INCORPORATED						
			ANGULAR ±3 °		MATERIAL NO.						DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1 OR 2						SD-54550-043		1 OF 3
			REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

10 9 8 7 6 5 4 3 2 1

引き出し方向
PULL OUT DIRECTION

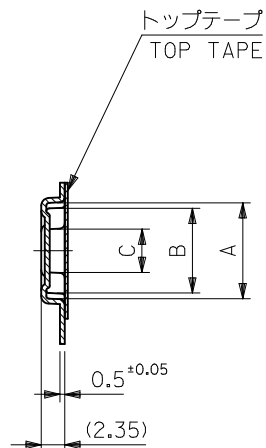

SECT. Y-Y

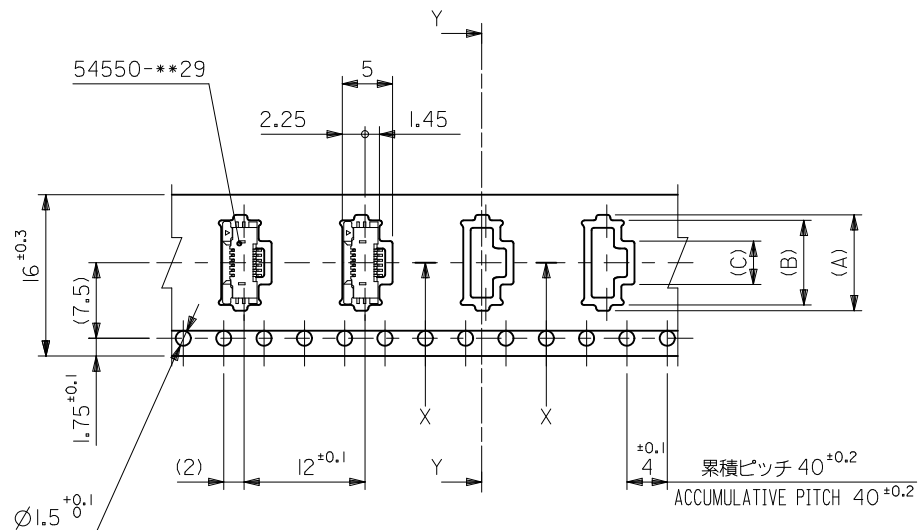

SECT. X-X

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	21.4	17.4	4.3	8.4	9.5	54550-0671	6
			3.8	7.9	9	54550-0571	5
			3.3	7.4	8.5	54550-0471	4
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	製品番号 MATERIAL No.	極数 Ckt

REVISED EC NO: J2010-1202 2009/12/11 DRWN: TONO 2009/12/11 CHKD: SHIMOMIYAMA 2009/12/11 APPR: KMORI KAWA 2009/12/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY M. NINOMIYA	DATE 2004/02/12	TITLE EMBSTP PKG FOR 0.5 FPC CONN ZIF UPR CONT				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE 2004/02/12					
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2004/02/12	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-54550-043			2 OF 3	
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

F

E

D

C

B

A

F



E

D

C

B

A

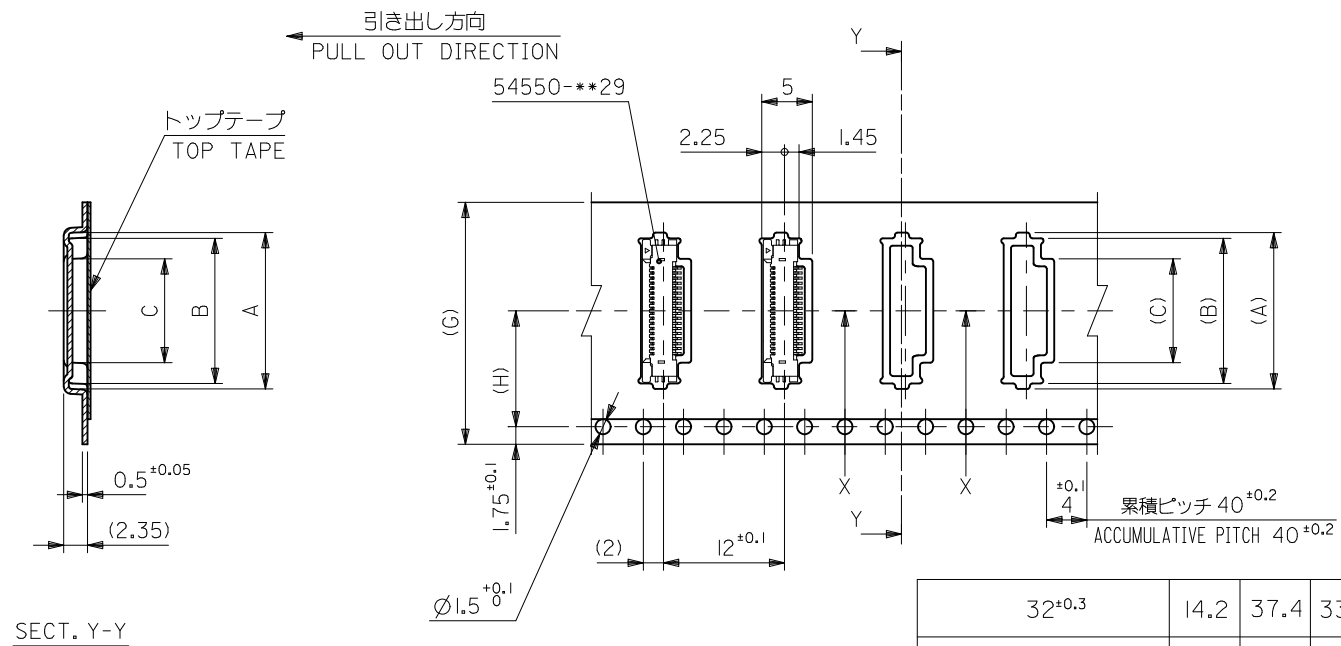

SECT. Y-Y

24, 32mm幅キャリアテープ
24mm, 32mm WIDTH CARRIER TAPE

32 ^{±0.3}	14.2	37.4	33.4	14.3	18.4	19.5	54550-2671	26
24 ^{±0.3}	11.5	29.4	25.4	13.3	17.4	18.5	54550-2471	24
				12.3	16.4	17.5	54550-2271	22
				11.8	15.9	17	54550-2171	21
				11.3	15.4	16.5	54550-2071	20
				10.8	14.9	16	54550-1971	19
				10.3	14.4	15.5	54550-1871	18
				9.8	13.9	15	54550-1771	17
				9.3	13.4	14.5	54550-1671	16
				8.3	12.4	13.5	54550-1471	14
				7.8	11.9	13	54550-1371	13
				7.3	11.4	12.5	54550-1271	12
				6.8	10.9	12	54550-1171	11
				6.3	10.4	11.5	54550-1071	10
				5.8	9.9	11	54550-0971	9
				5.3	9.4	10.5	54550-0871	8
				4.8	8.9	10	54550-0771	7
G キャリアテープ幅 CARRIER TAPE WIDTH	H	E	D	(C)	(B)	(A)	製品番号 MATERIAL No.	極数 Ck+

REVISED EC NO: J2010-1202 DRWN: TONO 2009/12/11 CHKD: SHIMOMIYAMA 2009/12/11 APPR: KMORI KAWA 2009/12/14	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY M. NINOMIYA	DATE 2004/02/12	TITLE EMBSTP PKG FOR 0.5 FPC CONN ZIF UPR CONT				
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TOJO	DATE 2004/02/12					
		30 OVER	±0.3	APPROVED BY M. SASAO	DATE 2004/02/12	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE							
	REV		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						