



DESCRIPTION: M12 MALE - BOARD MOUNT - 5 POS.

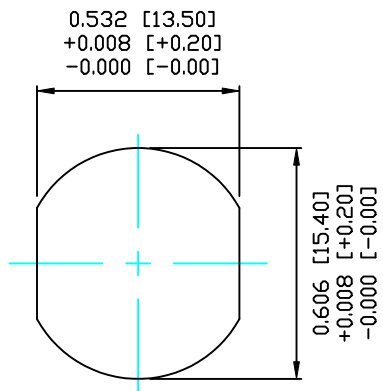

PANEL CUTOUT

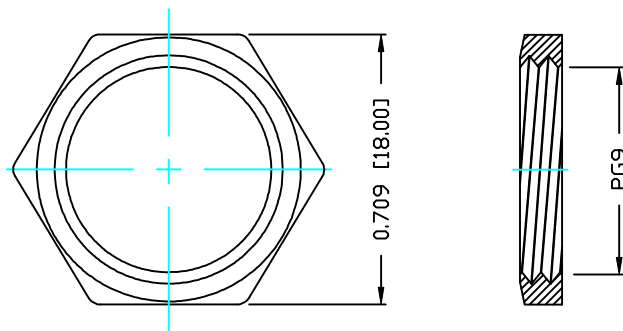

NUT

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
CONTACT: BRASS
SHELL: BRASS
NUT: BRASS
O-RING A: EDPM, BLACK
O-RING B: NBR

FINISH


CONTACT: GOLD 10µ" MIN.
OVER 50µ" NICKEL
SHELL: NICKEL PLATED
NUT: NICKEL PLATED

ELECTRICAL




RATED CURRENT: 5A
RATED VOLTAGE: 125V
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C

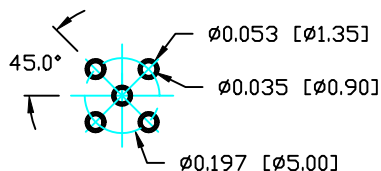

PCB LAYOUT

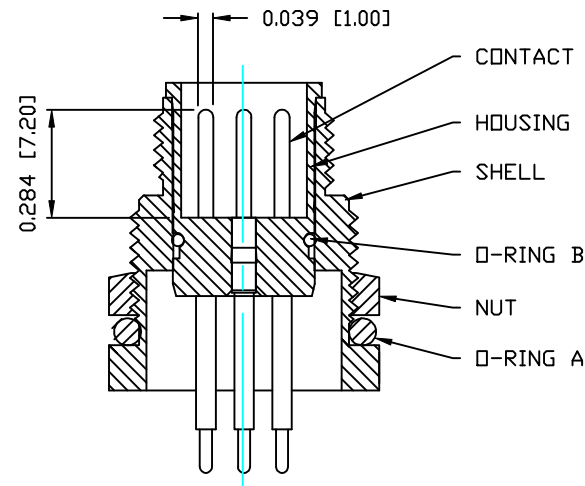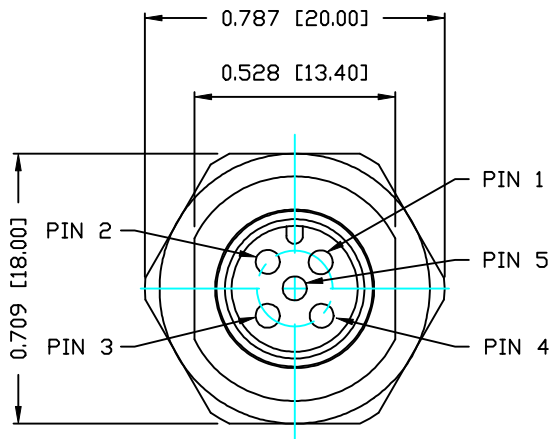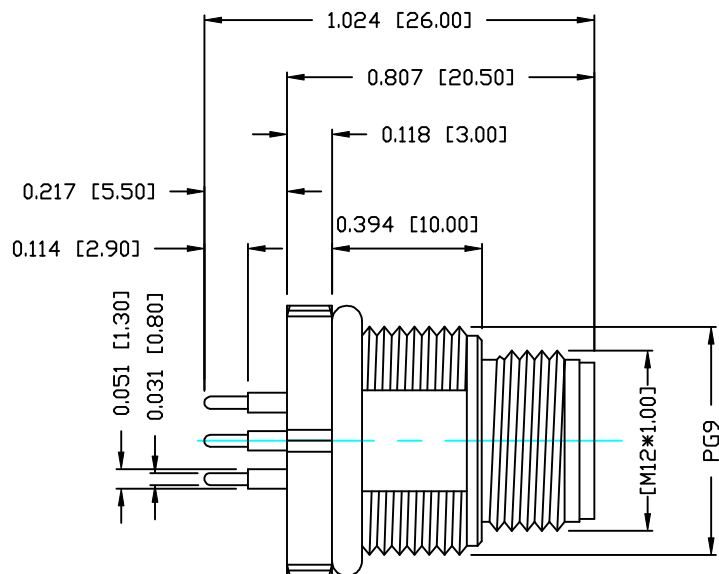

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
10-10-14

CHECKED:

DATE:

NorComp

SCALE:
N.T.S.

SHEET 1 OF 1

REV 0

DWG NO.

860-005-113R004