

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

76155-1803

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 4 Pair Vertical Backplane Header, Unguided, Open Endwall, 8 Columns, 96 Circuits, Pin Length 4.50mm, Plated Through Hole Dimension 0.46mm, Lead-Free

Documents:

3D Model


Application Specification AS-76060-990 (PDF)

Drawing (PDF)

Application Specification AS-76060-994 (PDF)

Product Specification PS-76060-999 (PDF)

RoHS Certificate of Compliance (PDF)

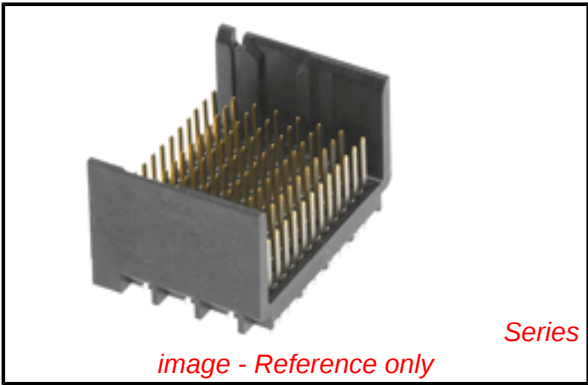

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

76155

Application

Conventional

Application Tooling Documents

TM-622018799

Component Type

PCB Header

Overview

Impact™ Backplane Connector and Cable Assembly System

Product Name

Impact™

UPC

883906417031

Physical

Circuits (Loaded)

96

Circuits (maximum)

96

Color - Resin

Black

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

2.039/g

Number of Columns

8

Number of Pairs

4

Number of Rows

12

Orientation

Vertical

PC Tail Length

1.40mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.00mm

Packaging Type

Tray

Pitch - Mating Interface

1.90mm

Pitch - Termination Interface

1.90mm

Plating min - Mating

0.762µm

Polarized to PCB

No

Temperature Range - Operating

-55°C to +85°C

Termination Interface: Style

Through Hole - Compliant Pin

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76155Series

Mates With

76160 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Backplane Insertion Tool for Signal Contact	0621005800
Press-In Tool for Backplane Module	0622018676
Backplane Header Removal Tool for	0621009610

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990, AS-76060-994
Electrical Model Document	EE-76160-0001
Product Specification	PS-76060-999
Sales Drawing	SD-76155-001
Symbol/Footprint Data	SYM-76155-1803

GbX-U™, I-Trac™,
Impact™, or TinMan

This document was generated on 06/04/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION