

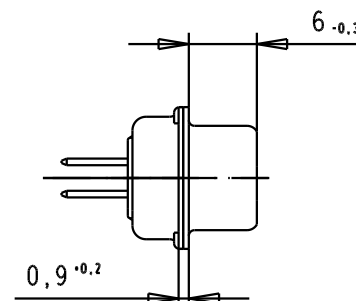




PCB Layout, Component side

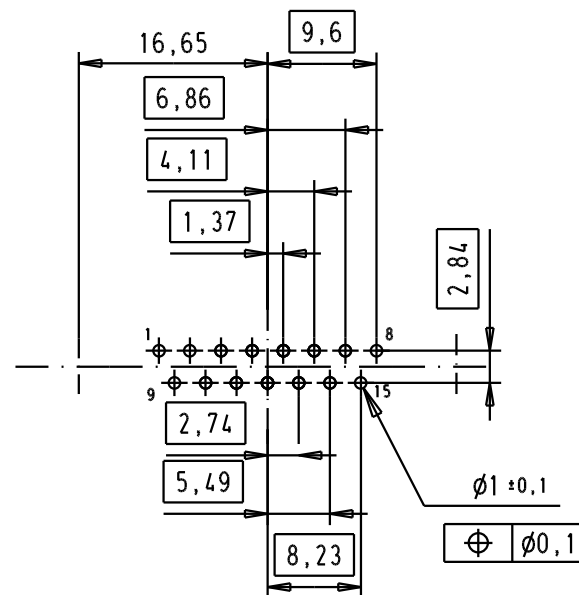

SPECIFICATION

Mating Cycles	500
filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, straight, 15 Poles, solder pins, tin plated shell with dimples and holes	Mo/MS lab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.					
			Stand.					
33267	17/11/05	JMDR	HARTING EURL F-95972 Paris				TB 09642227220	Blatt / Page 1 / 1
31058	8-JUL-02	CV						
Mod.	Dat.	Name						