


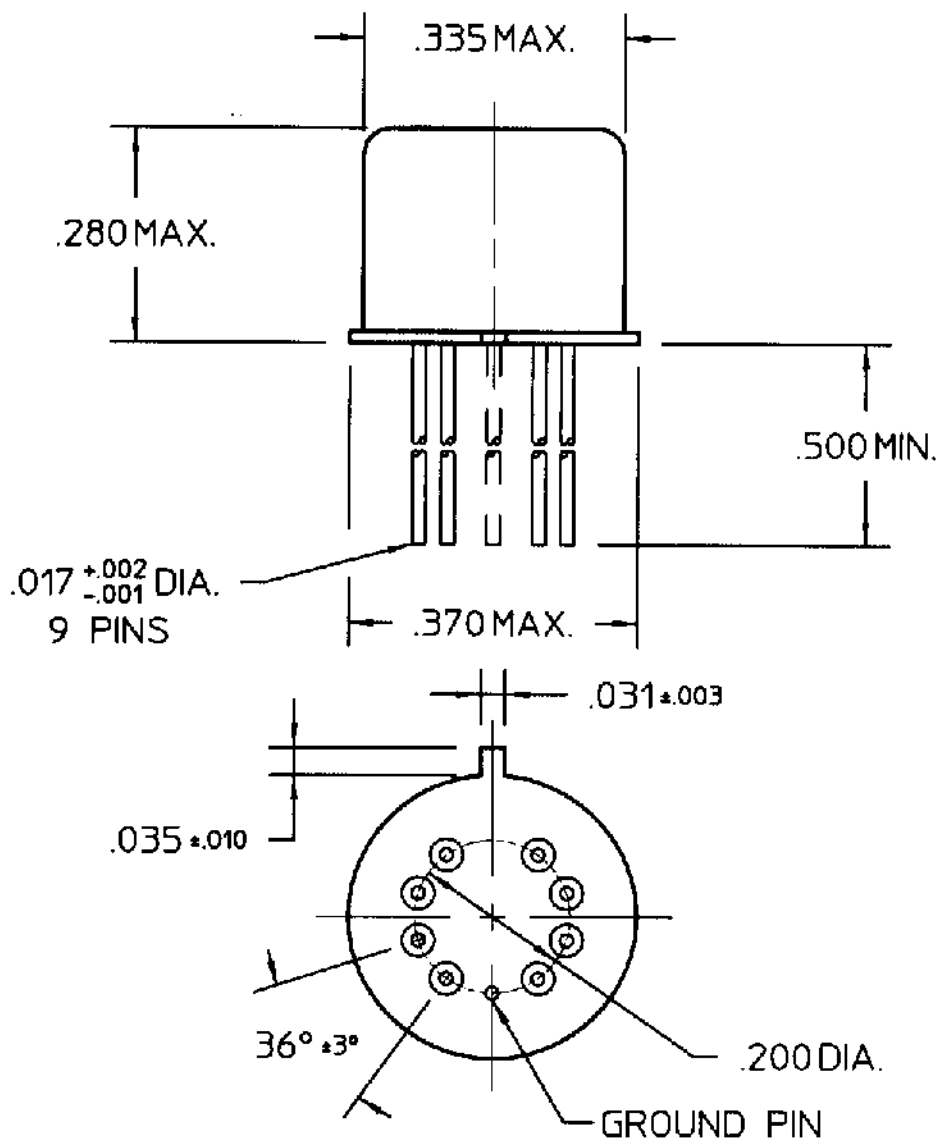

REV. 0

DCO 142077

COIL: @ 25°C
 RESISTANCE 390 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 7.0 VDC
 MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.

RELEASE TIME 4.0 MS MAX.

CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 6/6/00

CL. Gray 6/6/00



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M39016/15-091M REV.

"JMAD" RELAY

JMACDG-12XM