
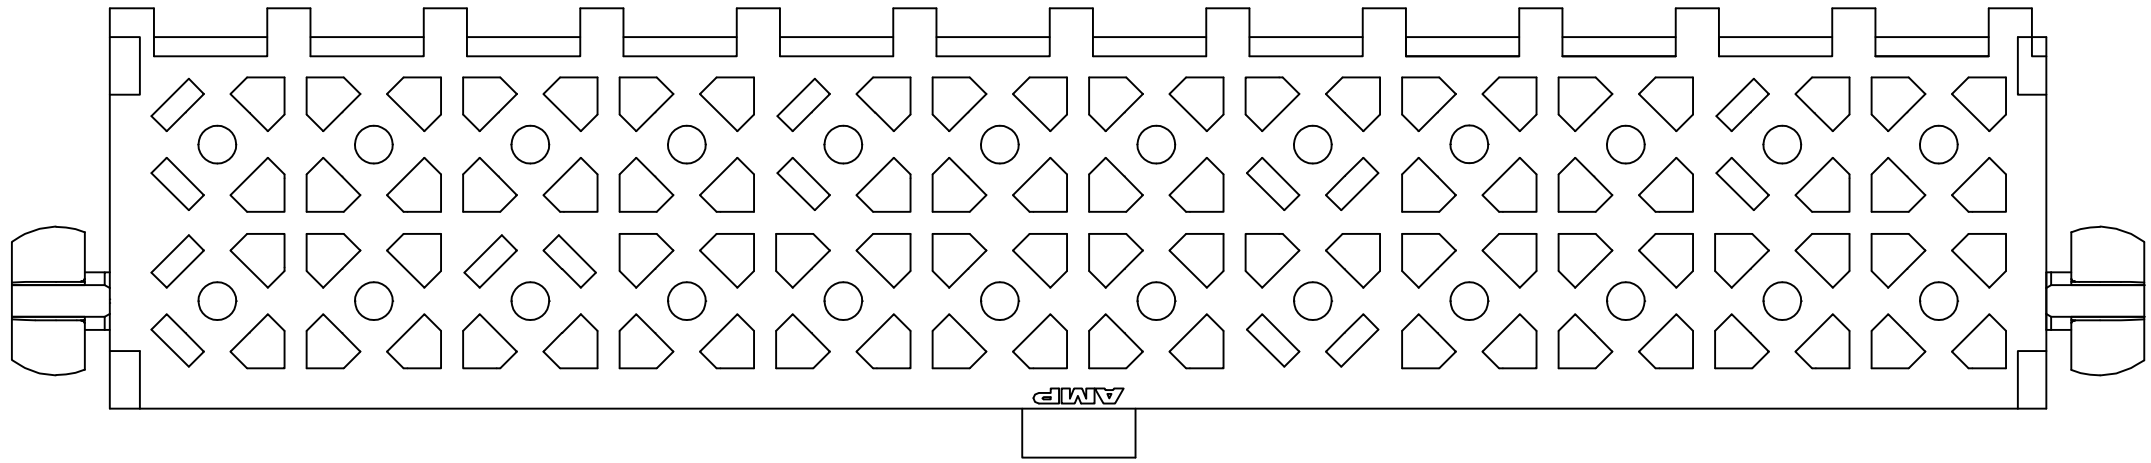
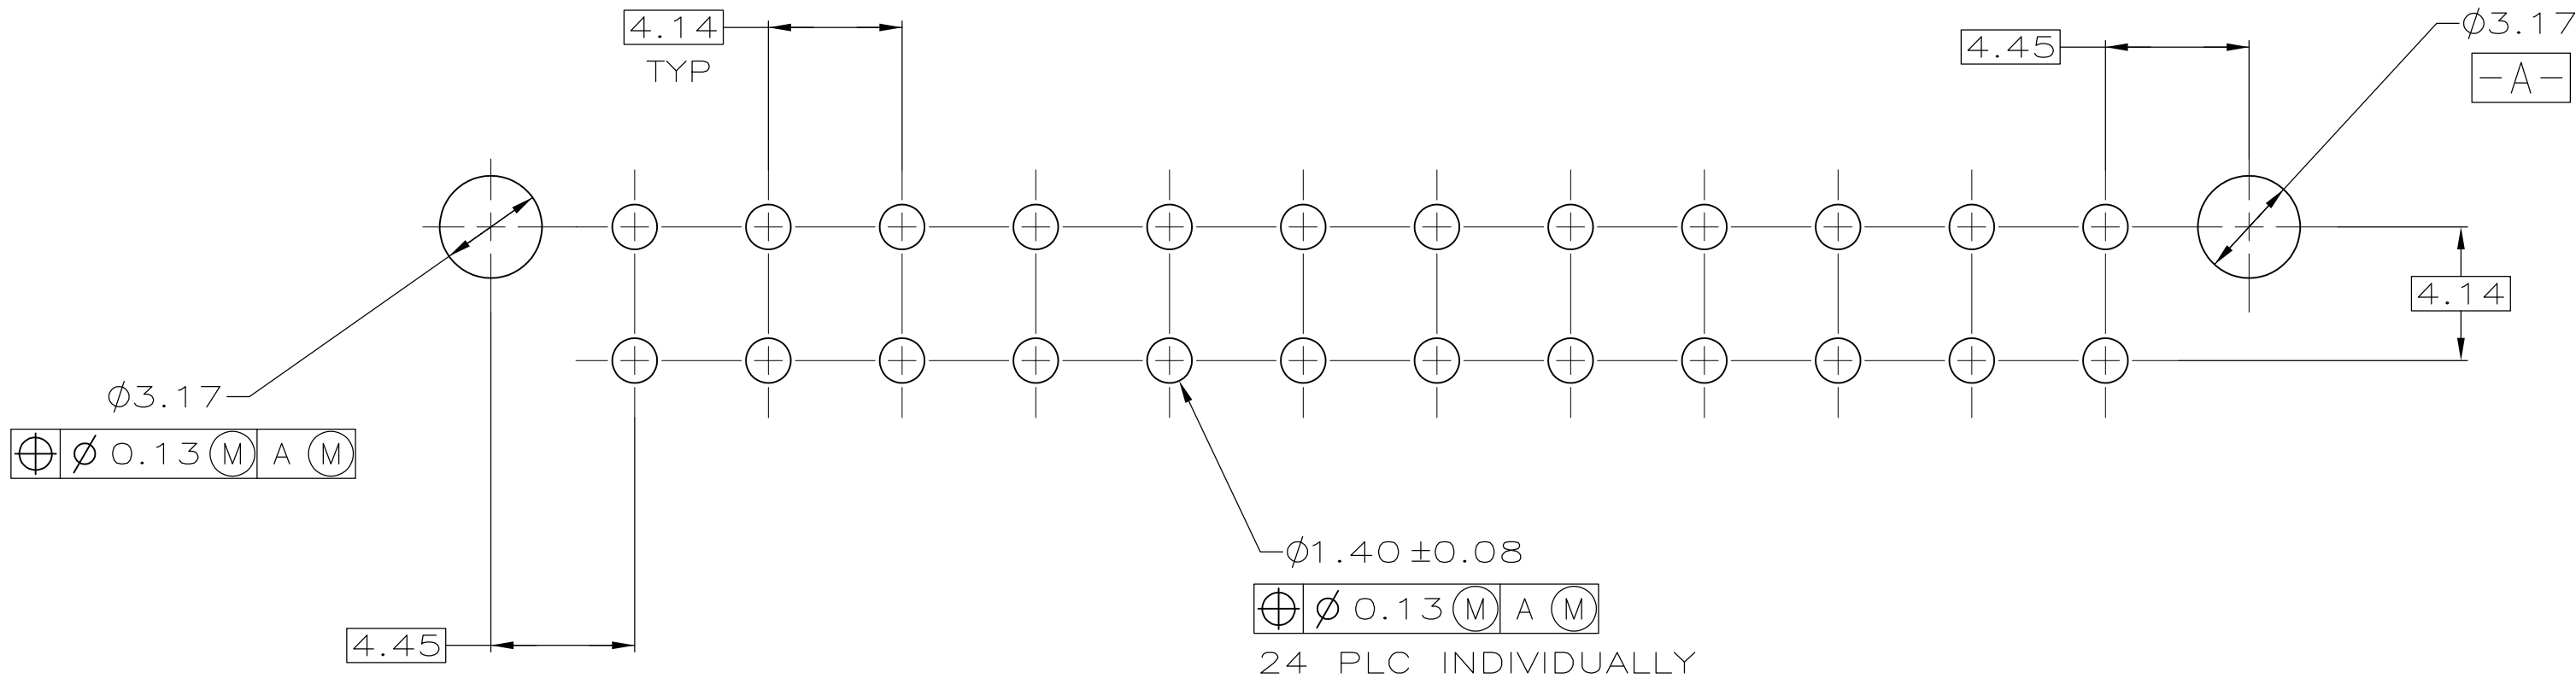
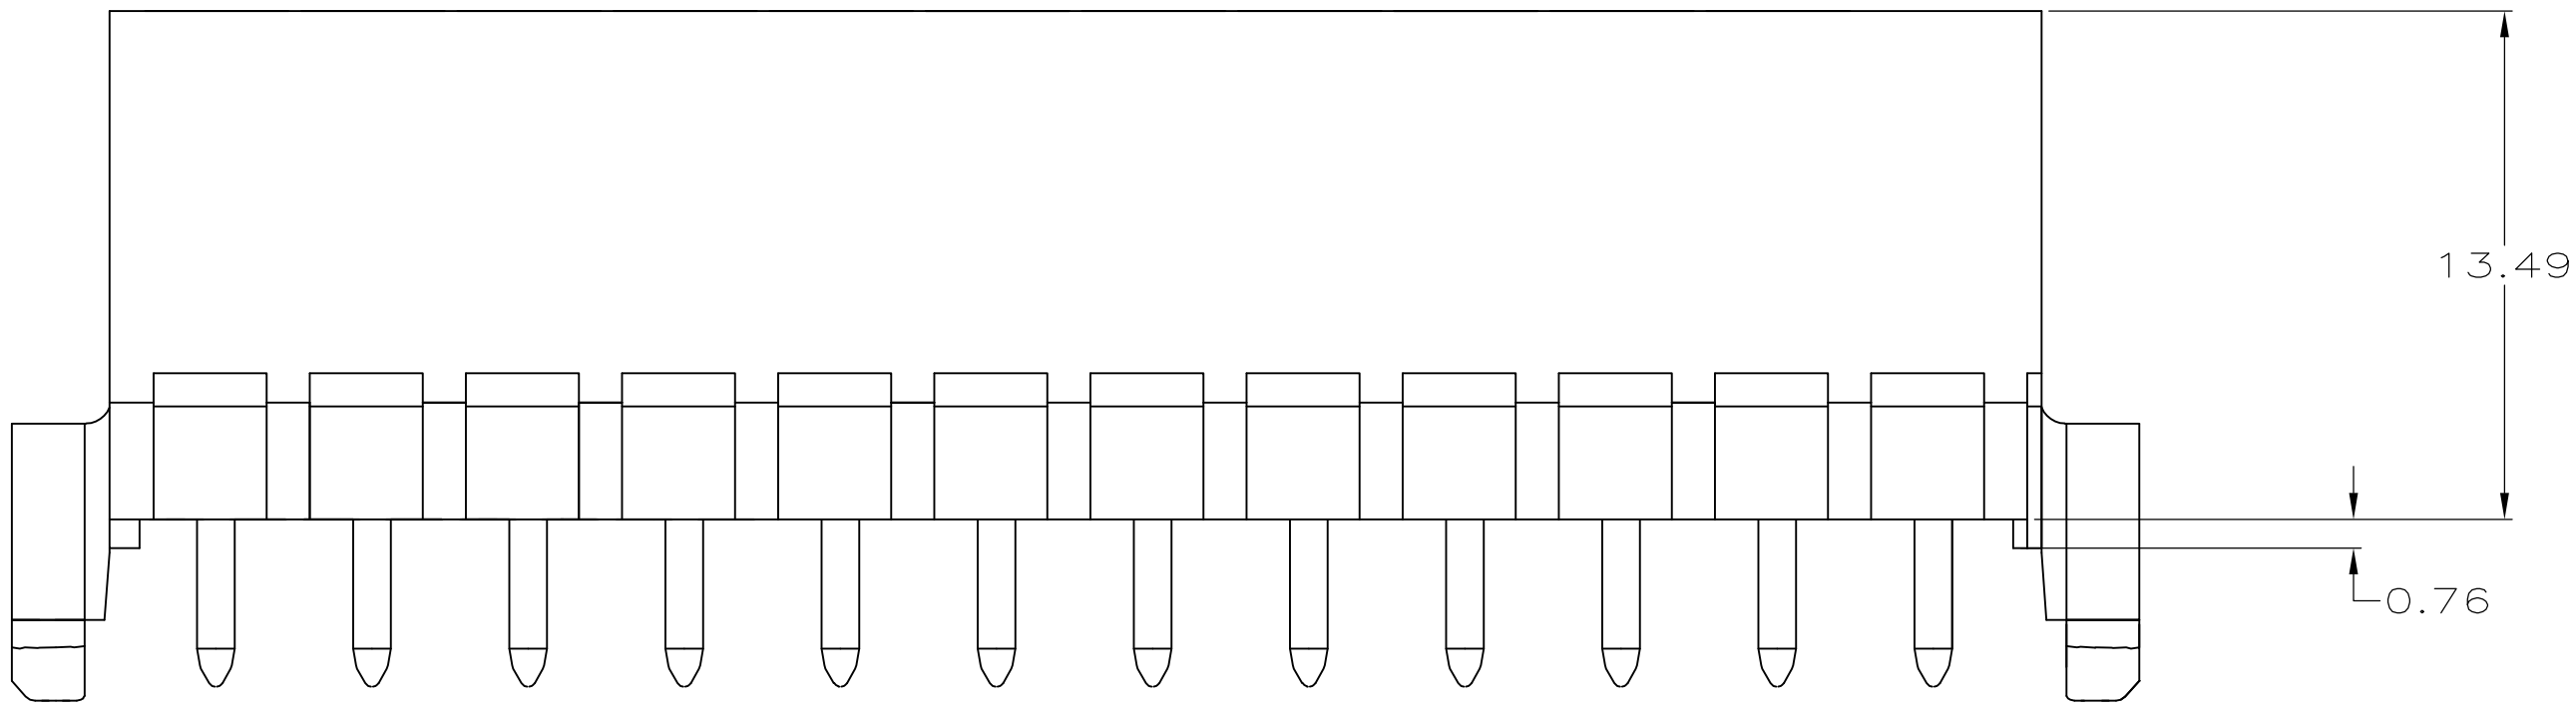
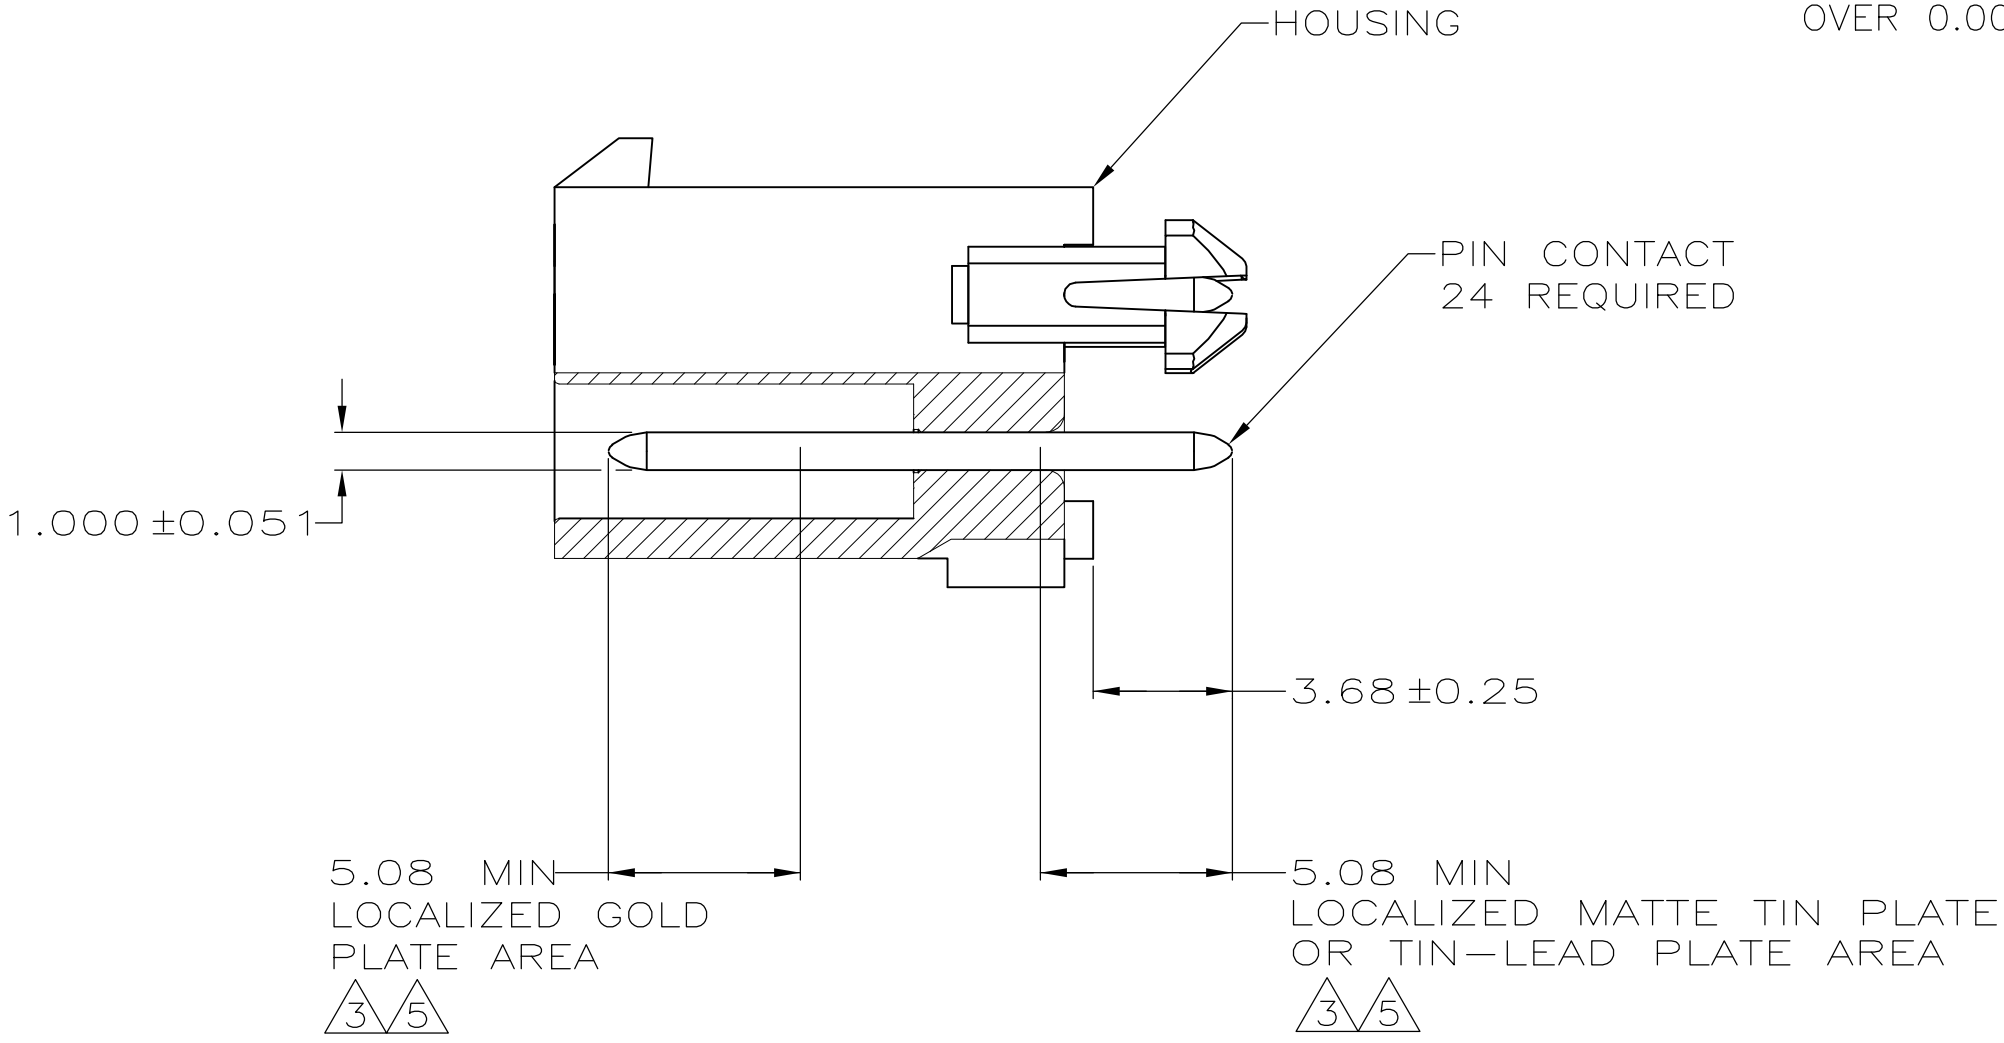


LOC	DIST	REVISIONS					
		F	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0	F		REVISED PER ECR-15-010337	24JUL2015	RK	SC

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
2. 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
3. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
4. 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
5. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

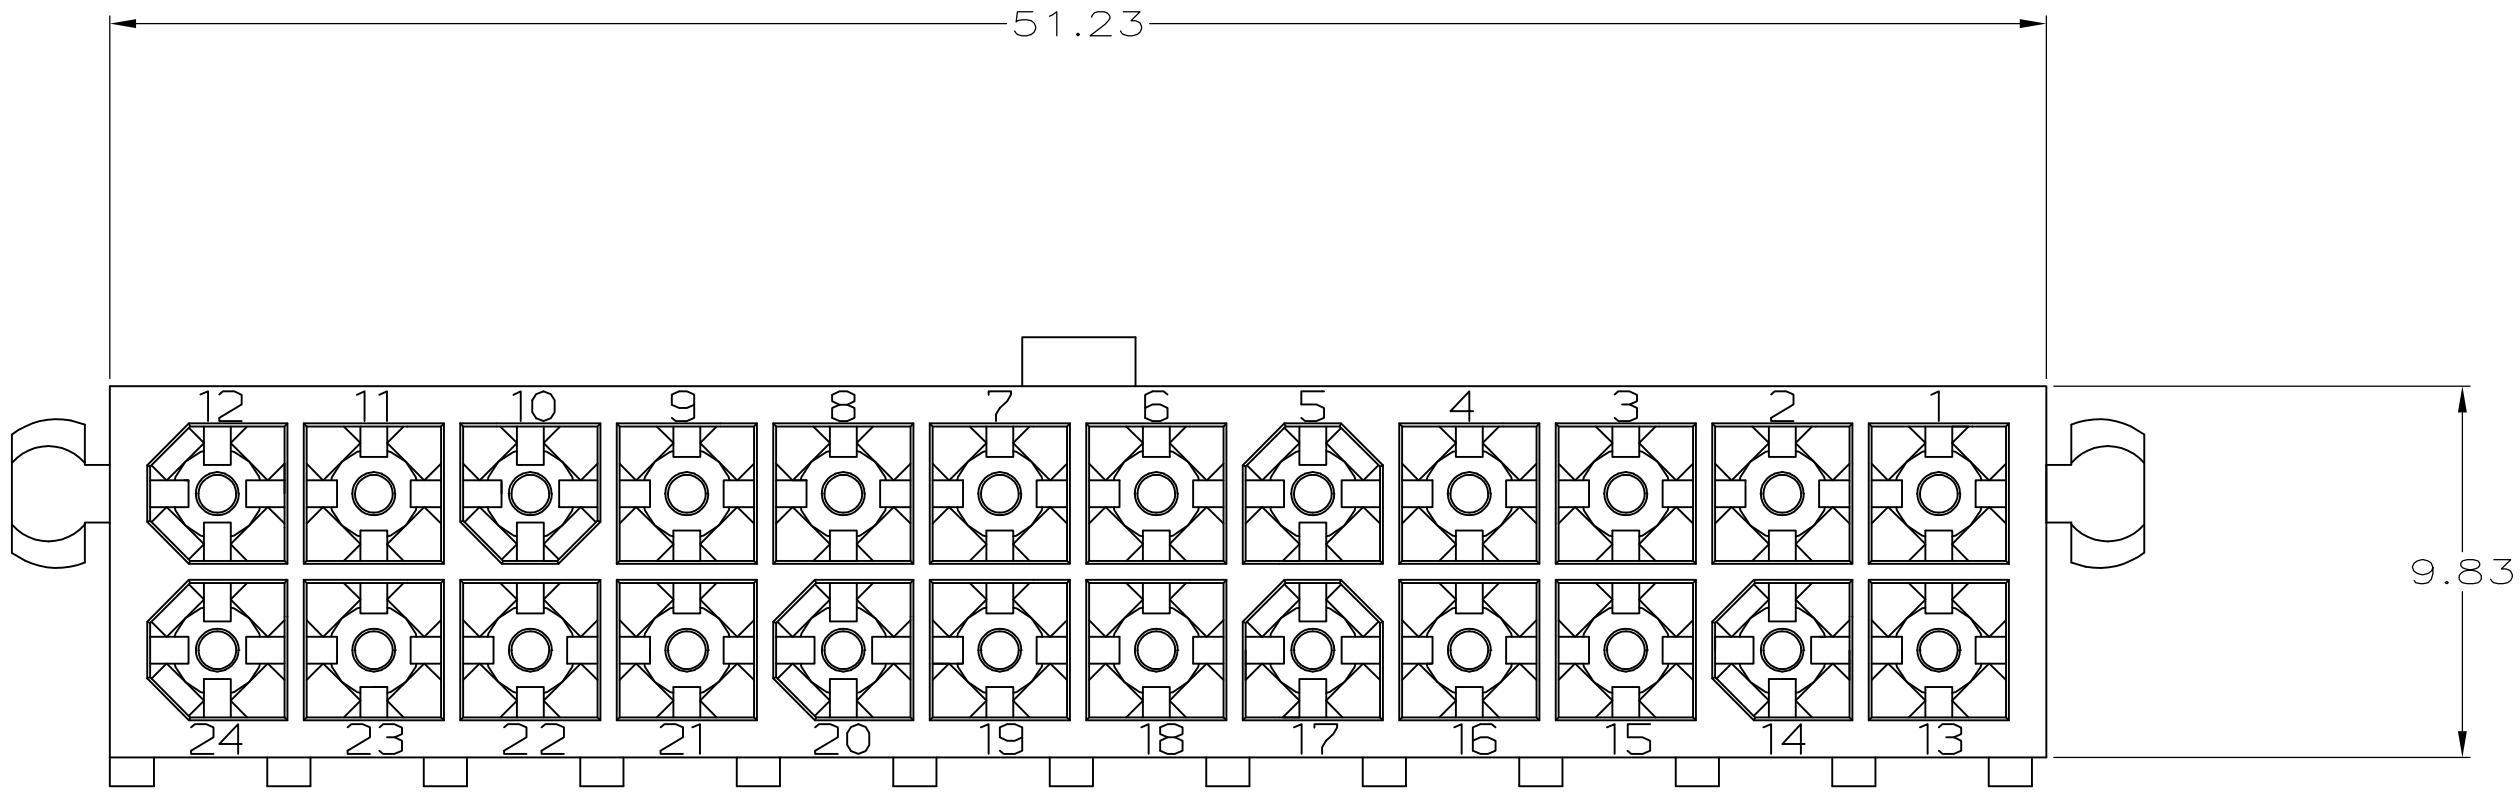

BRASS, GOLD 5	NYLON, 94V-0, WHITE	1-794072-1
BRASS, TIN 4	NYLON, 94V-0, WHITE	1-794072-0
BRASS, GOLD 3	NYLON, 94V-0, WHITE	794072-2
BRASS, TIN LEAD 2	NYLON, 94V-0, WHITE	794072-1
PIN CONTACT MATERIAL AND FINISH		PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -		1 PLC ± -
2 PLC ± 0.13		3 PLC ± -
4 PLC ± -		ANGLES ± -
MATERIAL -		FINISH -
WEIGHT -		SIZE
CUSTOMER DRAWING		SCALE 5:1
SHEET 1 OF 1		REV F