

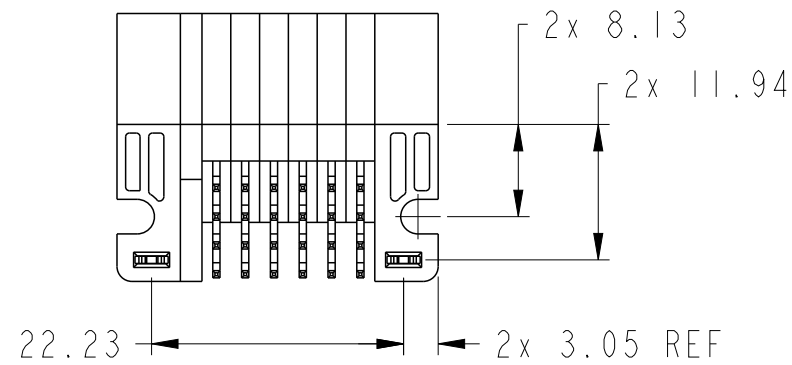
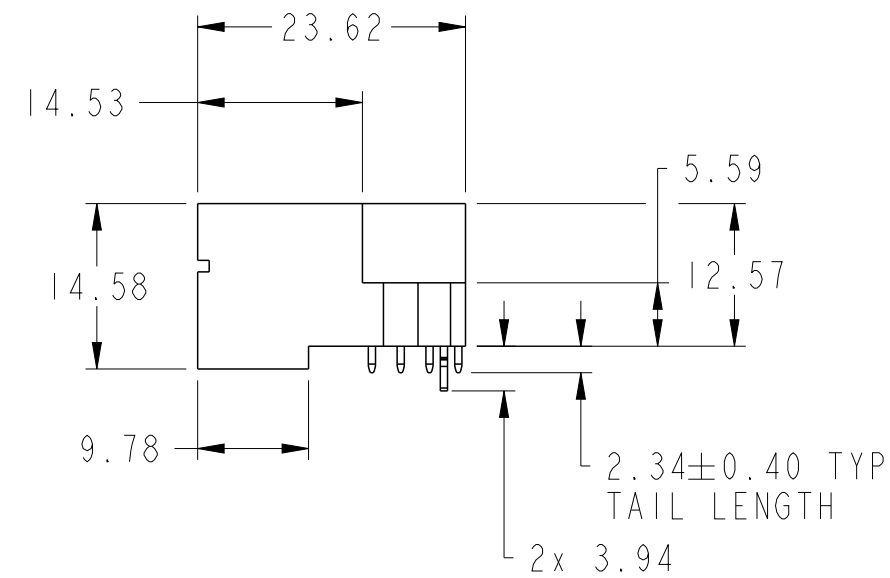


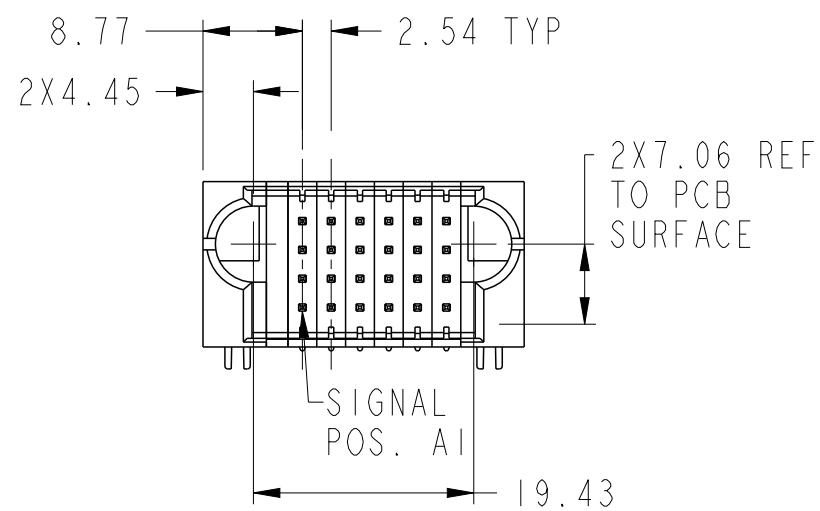


spec ref *				dr		Rainbow Zhan	2014/10/08		projection		MM		size		A3	scale		3:2			
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED					eng		Rainbow Zhan	2014/11/07						ecn no		-	
ASME Y14.5									chr		Li-He	2014/11/06						rel level		Released	
ASME Y14.5									appr		Pei-Ming Zheng	2014/11/07						product family		PwrBlade+	rel level
surface			linear		0.X		±0.5				title		24S		dwg no		10106262-0006002		rev		A
			0.XX		±0.25		RA STB HEADER														
			0.XXX		±0.10																
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3							

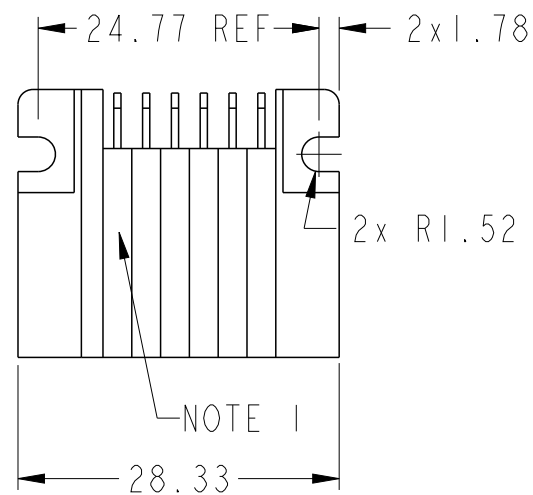


Copyright FCI.

PRODUCT NO.	ROWS	SIGNAL							
		E1	1	2	3	4	5	6	E2
10106262-0006002LF	DCBA		V	V	V	D	D	D	
			Q	Q	Q	Q	C	C	
			P	P	P	P	B	B	
			N	N	N	N	A	A	

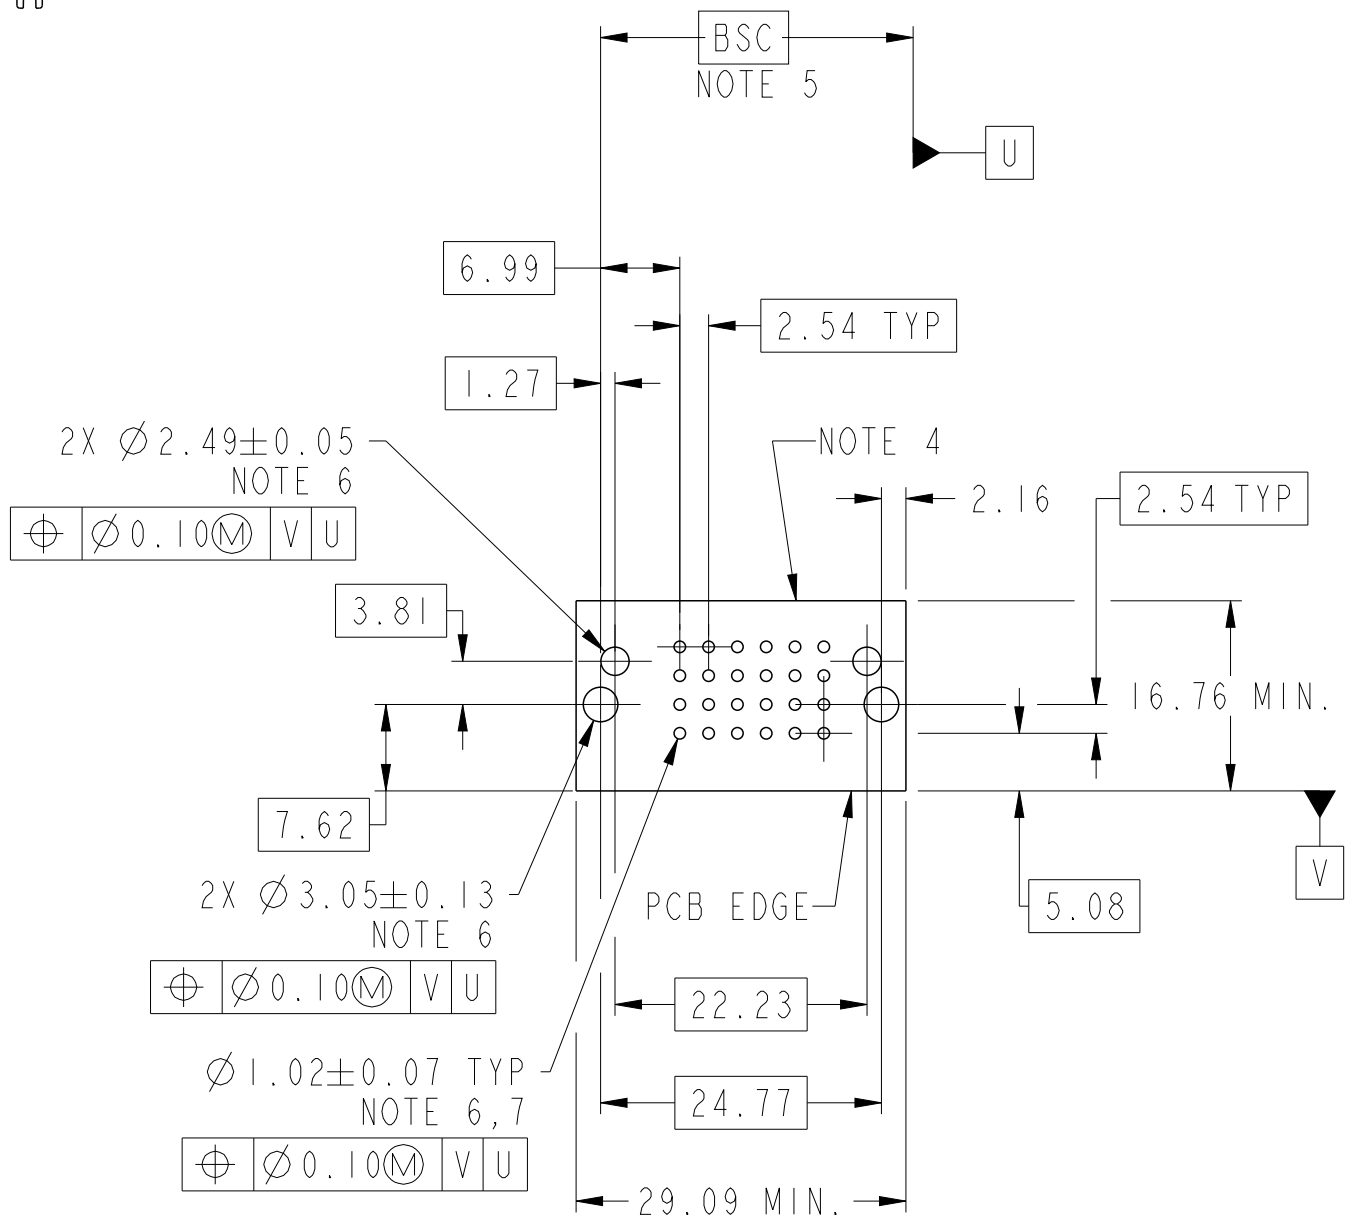

CODE	DESCRIPTION
A	MLBF SIGNAL CONTACT, ROW A (2.34)
B	MLBF SIGNAL CONTACT, ROW B (2.34)
C	MLBF SIGNAL CONTACT, ROW C (2.34)
D	MLBF SIGNAL CONTACT, ROW D (2.34)
HA	METAL HOLD DOWN
N	STD SIGNAL CONTACT, ROW A (2.34)
P	STD SIGNAL CONTACT, ROW B (2.34)
Q	STD SIGNAL CONTACT, ROW C (2.34)
V	STD SIGNAL CONTACT, ROW D (2.34)

dr	Rainbow Zhan	2014/10/08	projection 	MM 	size	A3	scale	3:2
eng	Rainbow Zhan	2014/11/07			ecn no	-		
chr	Li-He	2014/11/06			rel level		Released	
appr	Pei-Ming Zheng	2014/11/07	product family		PwrBlade+			
			title			24S		rev
			RA STB HEADER			dwg no		10106262-0006002
								A
www.fci.com		cat. no.		Product - Customer Drw			sheet 2 of 3	

A

B

C

D

A

B

C


D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Rainbow Zhan	2014/10/08	projection 	MM 	size	A3	scale	3:2			
eng	Rainbow Zhan	2014/11/07			ecn no			-			
chr	Li- He	2014/11/06			rel level			Released			
appr	Pei-Ming Zheng	2014/11/07			product family			PwrBlade+			
			title		24S	dwg no		10106262-0006002	rev	A	
RA STB HEADER			cat. no.		Product - Customer Drw			sheet 3 of 3			
www.fci.com											