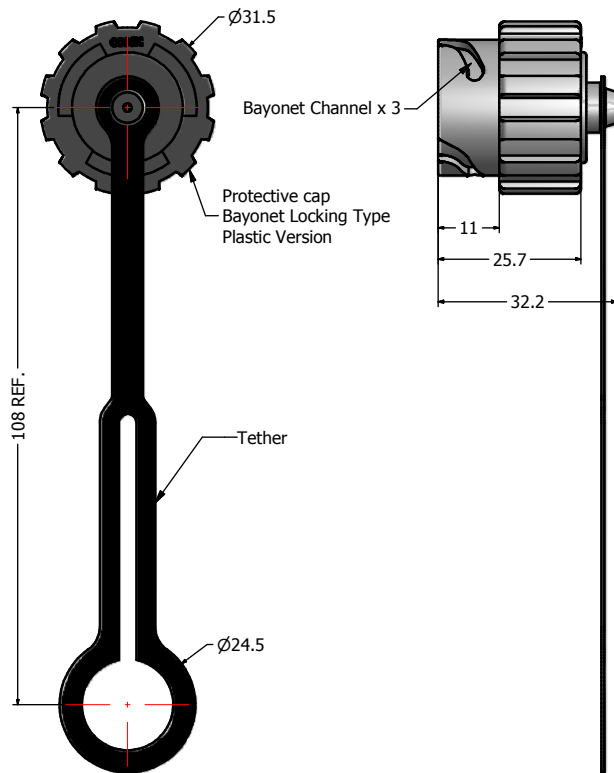


- Notes:**
- Material and Finish:
 - Coupler Ring: Polyester (Black); UL94 V-0
 - Plug Housing: Polyester (Black); UL94 V-0
 - Cable Gland: PA (Black), UL94 V-0
 - Cable Gland Rubber Ring: NBR, Color: Black
 - Cable Fitting: PA (Black), UL94 V-0
 - Interfacial Seal: Silicon, Color: White
 - Protective Cap: Polyester (Black); UL94 V-0
 - Tether: Polycarbonate (Black)
 - Duplex LC Connector
 - Housing: PEI, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
 - Inner Sub Assembly: Zirconia, Metal and PTFE
 - Crimp Barrel: Brass, Nickel Plated
 - Ferrule: Brass, Nickel Plated
 - Dust Cap: PC, Color: White
 - Duplex LC Clip: PC, Color: Black
 - Operating Temperature: -40°C to +85°C
 - IP67 rated when covered or fully mated with the appropriate mating connector
 - Accept 4.5mm to 8.0mm outside diameter fiber optic cable

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Plastic Duplex LC Single Mode Plug Kit + Plug Cover Assembly	17-300200
Plastic Duplex LC Multi Mode Plug Kit + Plug Cover Assembly	17-300210
Plastic Duplex LC APC Single Mode Plug Kit + Plug Cover Assembly	17-300220

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. CONECS CORPORATION OWNSHIP AND COPYRIGHT OF CONECS CORPORATION	DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: NTS		Dim. in mm	
		Name		Title	Approval Date	0 PLC ±0.30		1 PLC ±0.20	Material: See Notes		
						2 PLC ±0.10	3 PLC ±0.05				
						ANGLES ±1°	Autodesk Inventor		Title: IP67 Industrial Duplex LC Plug + Protective Cover Assembly Kit Plastic Version		
						2011 Date Name					
						Draw. Mar. 04 Vincent Ke	Drawing No.: 17K1A216		DIN A3		
						Appd. Mar. 04 J. Chaudry					
						Norm	Part No.: SEE P/N ABOVE		Sheet 1/1		
						D-old					
		b		Jul/12/2011	Vincent ke						
		a		original							
		Rev.	Changes	Date	Name						

CONEC

DIN
A3
Sheet
1/1