




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECR-16-011494	20JUN2017	NK	CX

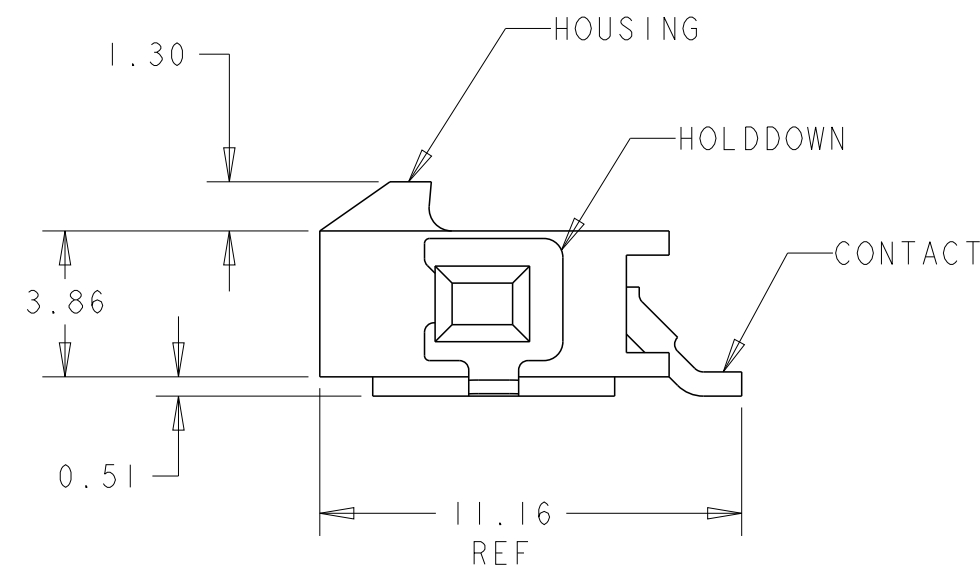

- ① MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.
- ② PLATING: CONTACTS - 0.38 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM TIN-LEAD OVER 1.27 μ m MINIMUM
NICKEL.
- ④ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ⑤ PLATING: CONTACTS - 0.38 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

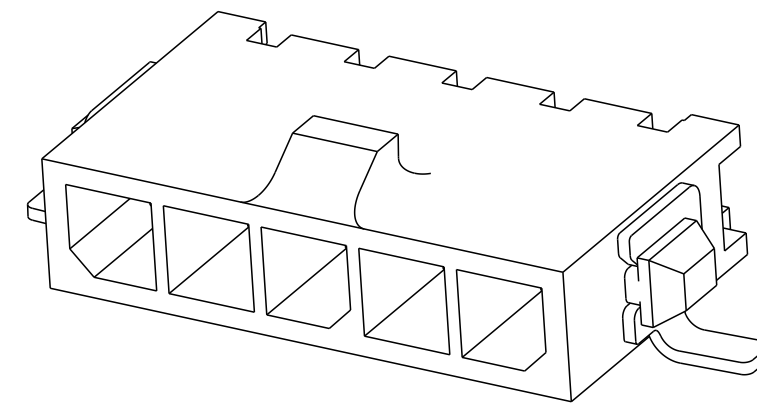

SUPERSEDED BY 3-1445091-2		33.00	40.41	40.00	12	1-1445091-2
SUPERSEDED BY 3-1445091-1		30.00	37.41	37.00	11	1-1445091-1
SUPERSEDED BY 3-1445091-0		27.00	34.41	34.00	10	1-1445091-0
SUPERSEDED BY 2-1445091-9		24.00	31.41	31.00	9	1-1445091-9
SUPERSEDED BY 2-1445091-8		21.00	28.41	28.00	8	1-1445091-8
SUPERSEDED BY 2-1445091-7		18.00	25.41	25.00	7	1-1445091-7
SUPERSEDED BY 2-1445091-6		15.00	22.41	22.00	6	1-1445091-6
SUPERSEDED BY 2-1445091-5		12.00	19.41	19.00	5	1-1445091-5
SUPERSEDED BY 2-1445091-4		9.00	16.41	16.00	4	1-1445091-4
SUPERSEDED BY 2-1445091-3		6.00	13.41	13.00	3	1-1445091-3
SUPERSEDED BY 2-1445091-2		3.00	10.41	10.00	2	1-1445091-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09OCT2000		 TE Connectivity					
		CHK J ROOT 17-APR-2001							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE SURF MOUNT HEADER ASSY, 0.38 MIC GOLD CONTACTS, W/SURF MNT. HOLDDONWS, SGL ROW, MICRO MATE-N-LOK™					
mm		APVD K WHITAKER 17-APR-2001							
		C JONES							
		PRODUCT SPEC							
		APPLICATION SPEC							
		-							
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		SEE TABLE		A2	00779	C=1445091	-		
CUSTOMER DRAWING						SCALE	SHEET	OF	REV
						5:1	1	1	B2

