

NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}^{+.001}$)
PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FUNNEL FERRULE
- ③ NYLON INSULATION (COLOR CODED YELLOW)

STUD SIZES: ($\pm .005$)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390
209 = .209


"UL" LISTING #E32244

"CSA" LISTING #18689

WIRE SIZE: 12 - 10 AWG
4.0 - 6.0 MM²

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

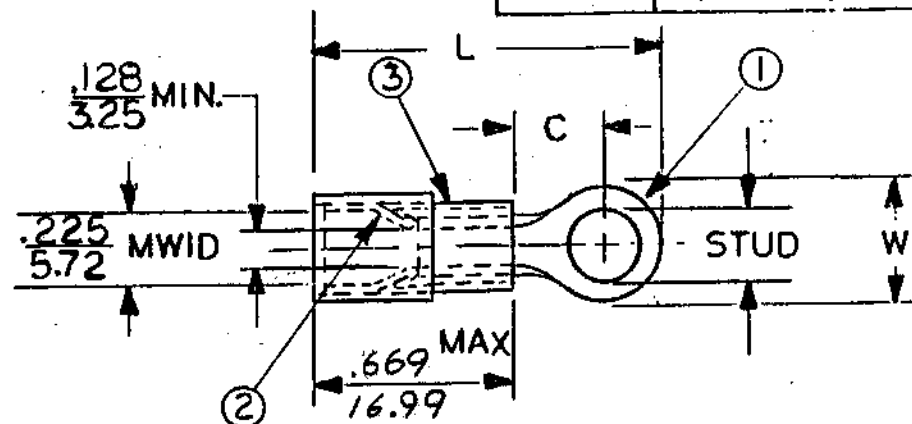

PART NUMBER	"W" $\pm .010$	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES	
C-501-	$\frac{.750}{19.05}$	$\frac{.611}{15.52}$	$\frac{1.700}{43.18}$				14, 56, 38, 76, 12	
C-528-	$\frac{.375}{9.53}$	$\frac{.303}{7.70}$	$\frac{1.205}{30.61}$				04, 06, 08, 10, 209	
C-530-	$\frac{.530}{13.46}$	$\frac{.393}{9.98}$	$\frac{1.372}{34.85}$				10, 14, 56, 38	
C-536-	$\frac{.282}{7.16}$	$\frac{.306}{7.77}$	$\frac{1.161}{29.49}$				04, 06, 08	
C-540-	$\frac{.592}{15.04}$	$\frac{.466}{11.84}$	$\frac{1.476}{37.49}$				10, 14, 56, 38, 209, 413	

DIMENSIONAL TOLERANCES
UNLESS OTHERWISE SPECIFIED

REFERENCE

SCALE: NTS

DATE

TITLE:

FRAC. DEC. ANG.

$\pm$ $\pm$ $\pm$

REV A DEN 1030
Rm 1/6/94

DRWN. BY: JJ

CHKD. BY: GZ

APPRD. BY:

11-15-84

11-26-84

RING TONGUE
TERMINAL
AVIKRIMP
500-SERIES

ETCmolex
INCORPORATED

DWG.
NO.

A

CUSTOMER
DWG