

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20





BY -

ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECO-17-005566	27APR17	B.J	S.Y

LOW HALOGEN

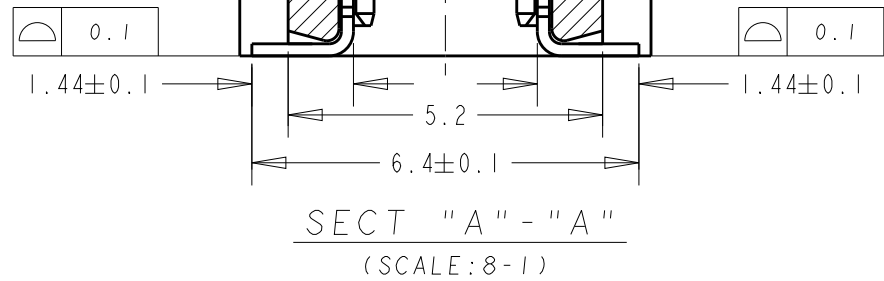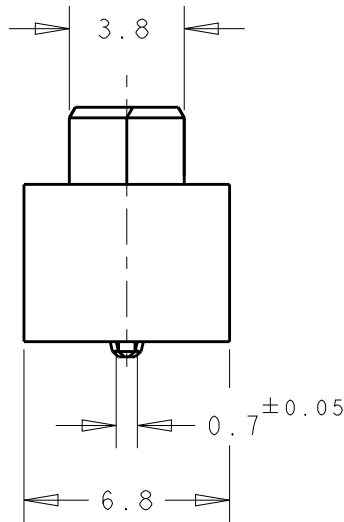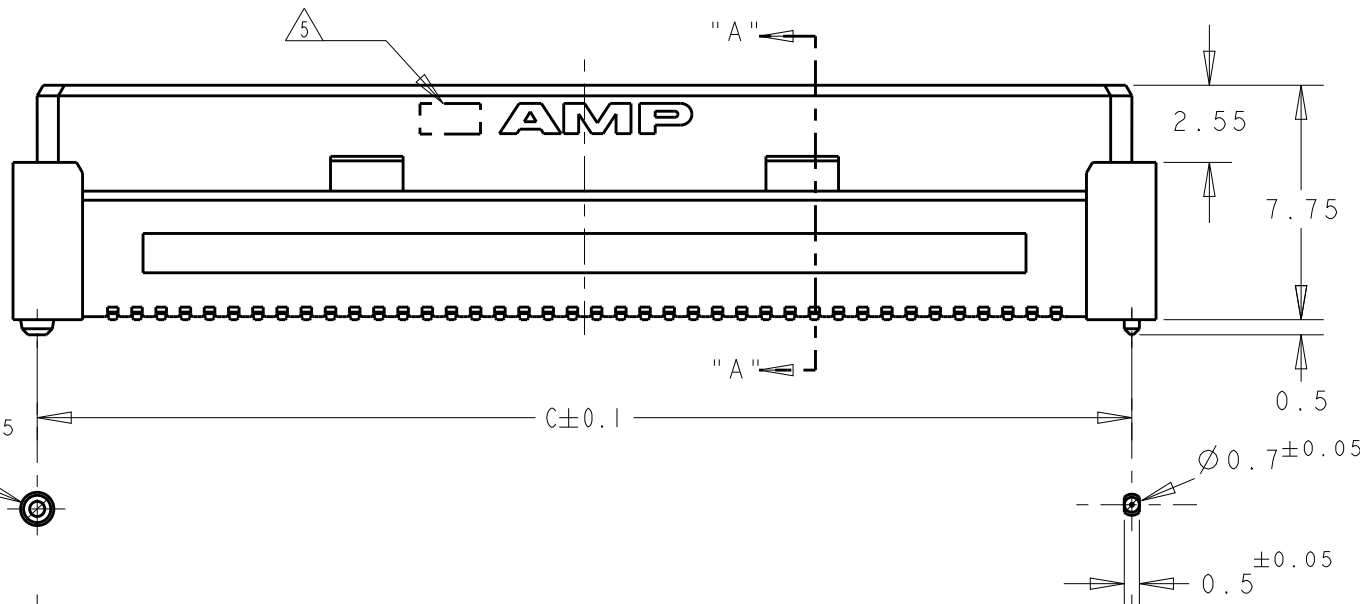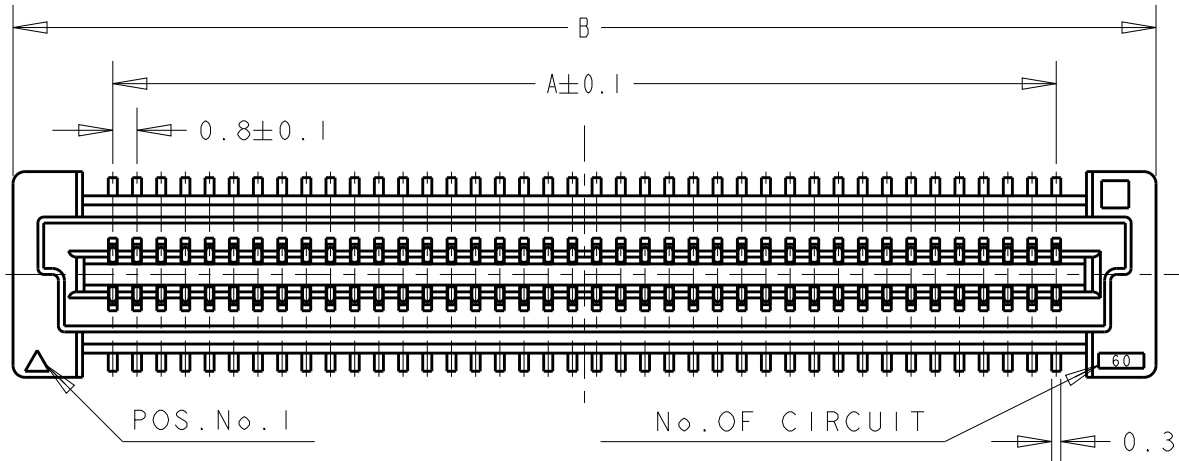

NOTES;

- MATERIAL: HOUSING: L.C.P. (HIGH TEMP. THERMOPLASTIC)
UL 94V-0, NATURAL.
CONTACT: BERYLIUM COPPER.
- FINISH: CONTACT AREA: 0.0002 MIN GOLD ON
0.0013 MIN ALL OVER NICKEL.
SOLDERING AREA: 0.002 MIN MATTE-TIN
- POSITION SERIES: SEE TABLE. (SHEET 2)
- CONN STACK HEIGHT COMBINE OF PLUG "Y" H VS REC "X" H.
STACK HEIGHT = Y + X - 5
- MANUFACTURE PLANT LOCATION MARK. QINGDAO:
- CONNECTOR WITH BLACK HOUSING AND POLYIMIDE COVER

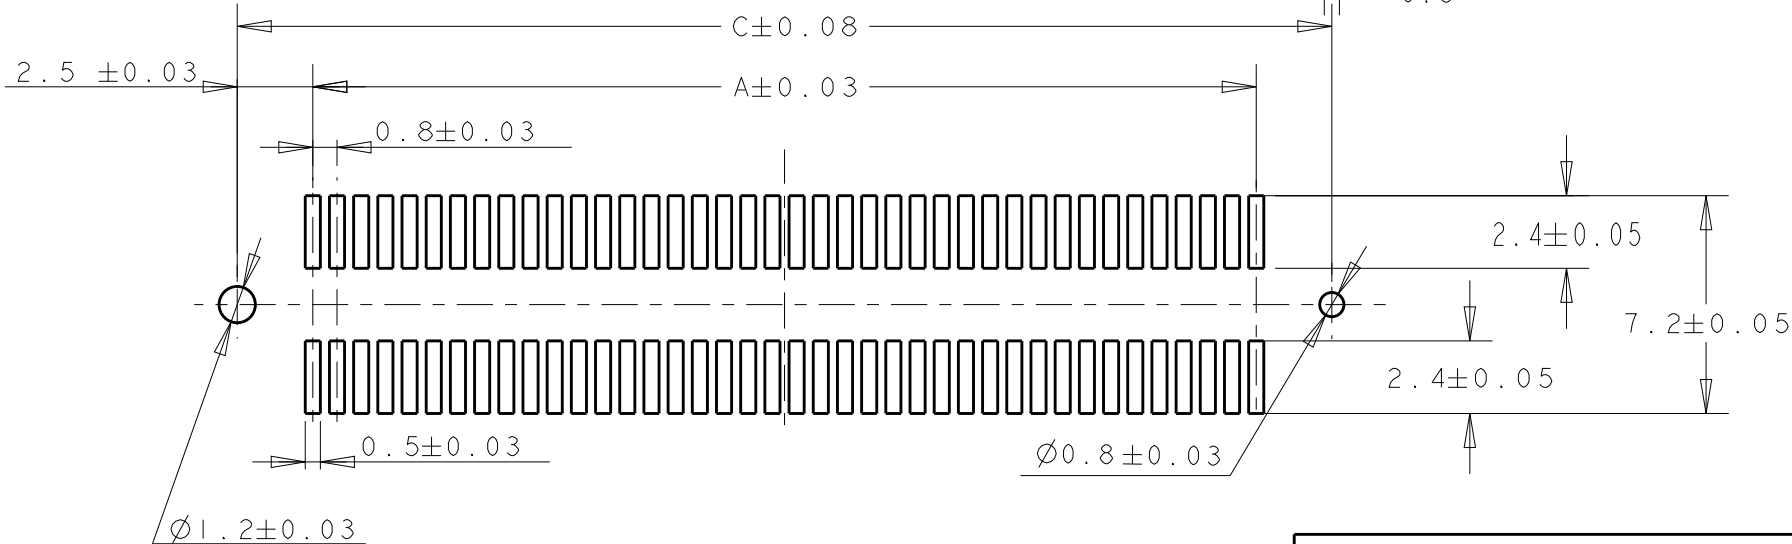

RECOMMENDED P.C. BOARD LAYOUT

CONNECTOR ONLY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.30
	1 PLC ±0.25
	2 PLC ±0.20
	3 PLC ±0.20
	4 PLC ±0.20
	ANGLES ±3°
MATERIAL	FINISH

DWN	FLORENCE TAN	14SEP04
CHK	ERIC TNG	-
APVD	SEIFONG	-
PRODUCT SPEC	108-5390	-
APPLICATION SPEC	114-5254	-
WEIGHT	-	-
CUSTOMER DRAWING		



TE Connectivity

NAME			
RCEPTACLE ASSEMBLY 9H TYPE FOR FH 0.8mm PITCH B-T-B CONNECTOR			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-5179009	-
SCALE		SHEET	REV
4:1		1 OF 3	R

SEE SHEET 1 OF 3
$$\begin{array}{r} -508 \\ +1 \\ -2.5 \\ \hline \end{array}$$

SECT "A" - "A"

REC ASS'Y (H=9mm, W/STEEL COVER), 0.8mm BTB STACKING CONN

SECT "B" - "B"

SEE
DETAIL "A"

WITH POLYIMIDE COVER

DETAIL "A"
(SCALE 5-1)

LOW HALOGEN



TE Connectivity

DWN	14SEP04
FLORENCE TAN	
CHK	-
ERIC TNG	
APVD	-
SF IFONG	
PRODUCT SPEC	
108-5390	
APPLICATION SPEC	
114-5254	
WEIGHT	-
CUSTOMER DRAWING	