

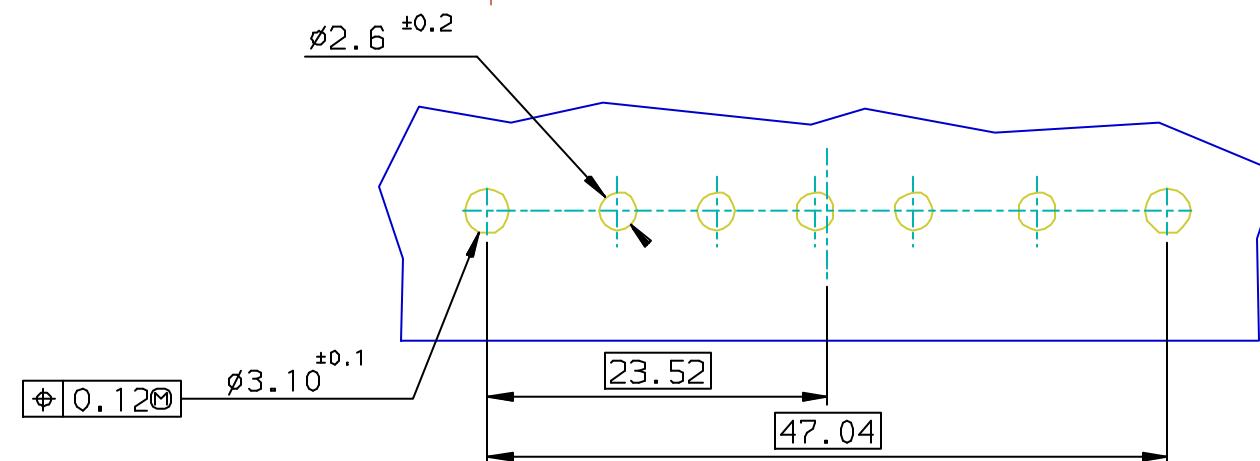
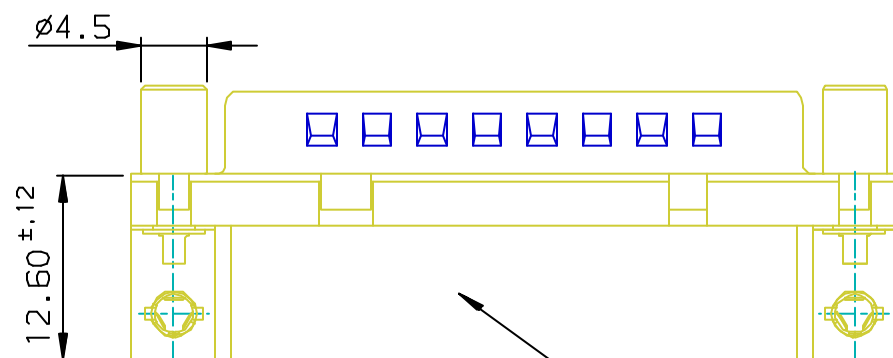
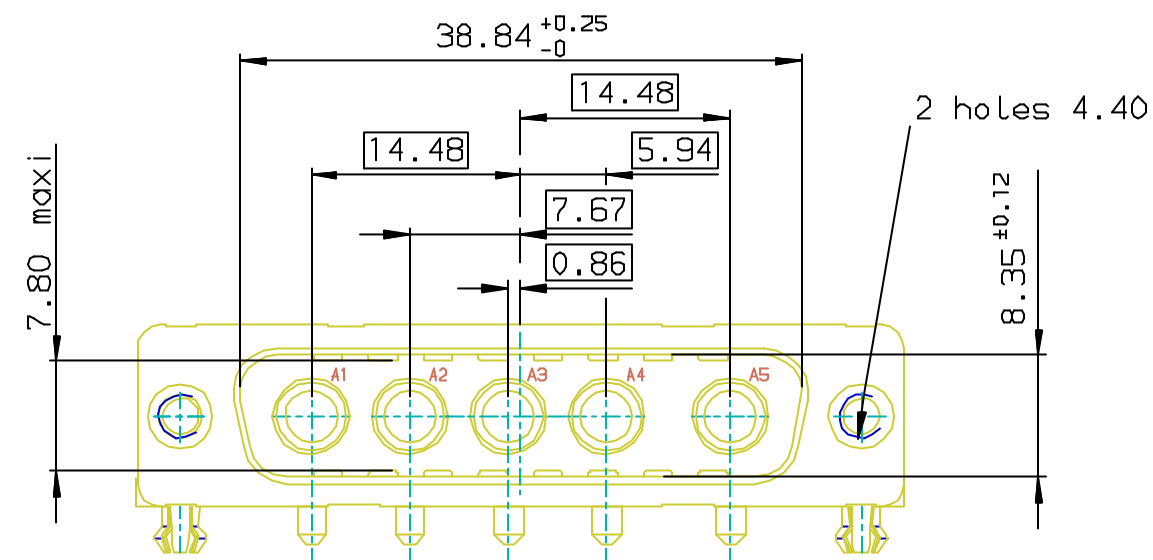


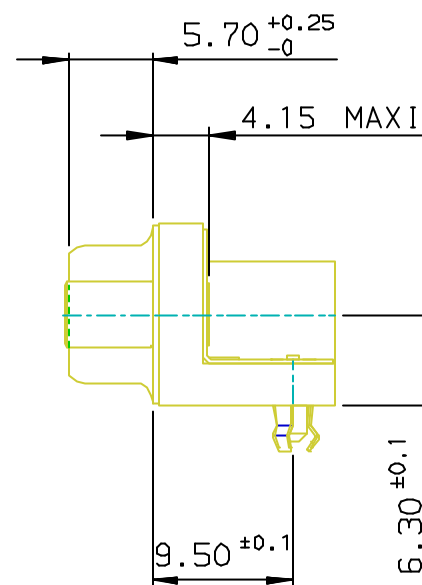

Copyright FCI.

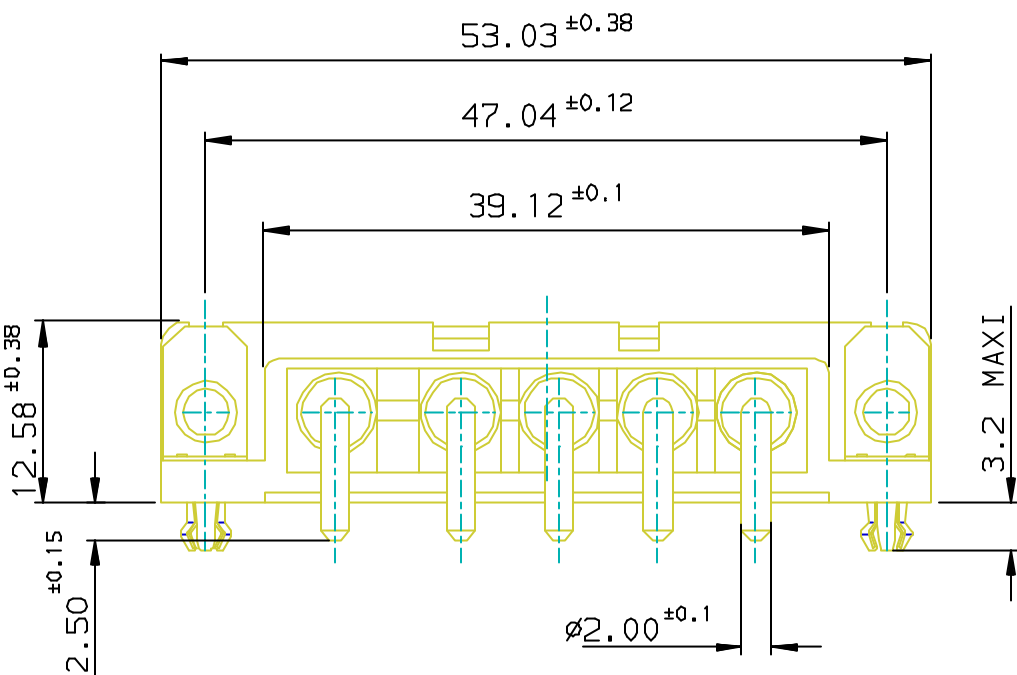

REQUIREMENTS

Technical characteristics:

- Material contacts - brass
- Finish on contact area - gold 0.76µ mini over nickel
- Finish on terminalson end - bright tin - lead over nickel

Shell: steel tin/Zinc Cr3 plated

Insulators: self-extinguishing thermoplastic, ULclass94V0

Grounding brackets: brass, tin/Zinc Cr3 plated

Female screwlock: brass, tin/Zinc Cr3 plated

Harpoon: brass, tin plated

Climatic characteristics:

Operating temperature range: -55°C +125°C

Dimensions:

in accordance with MIL-C-24308

Part Number & Date Code Printing

LF FOR LEAD FREE

Part number

DSWSP36A5GV08**

FOR ROHS DETAILS REFER DWG.N0:C01-8646-0000

European Views

rev	ecn no	dr	date
B	I05-0124	JS	2005/07/27
C	I06-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	JOHN SLEEBA	2001/02/06	ANGULAR		LINEAR	0.X	±0.1	size A3	Scale 1:1		
Eng	GEORGE VJ	2001/02/06				0.XX	±0.1				
Chr	GEORGE VJ	2005/07/27				0.XX' ±1°	0.XXX				±0.1
Appr	KVSD	2005/07/27	Product family					D-SUB	Spec ref -		
			title MALE CONNECT. 5W5 metal plate, harpoons,screwlock				dwg no C01-8646-0760			Rev. C	
			catalog no DELTA-D				CUSTOMER			sheet 1 of 1	

REV F - 2006-04-17