

COIL: 26.5 VDC NOMINAL	
WINDING #1	WINDING #2
1000 OHMS ± 10%	1000 OHMS ± 10%
8-13 VDC MUST OPERATE	8-13 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: _____


CUST. CII STD

CUST. NO. _____

TYPE "LS" RELAY

CUSTOMER DATA SHEET

CONTACTS WILL SWITCH FROM THE INDICATED POSITION WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN.

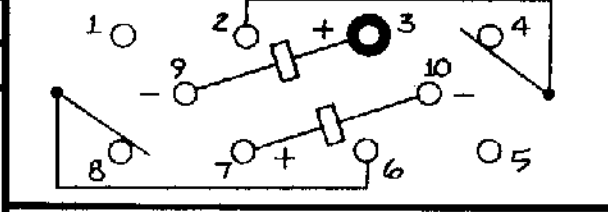

CONTACT RATING: 2 AMP / 28 VDC RESISTIVE

DR. R.B. 4-5-90 | CK. JAW 4-5-90



LSAW-ZC-24B