
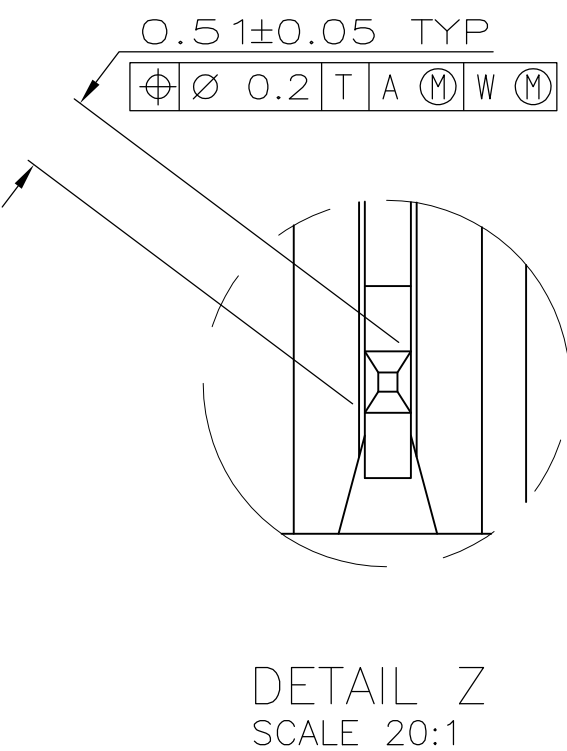
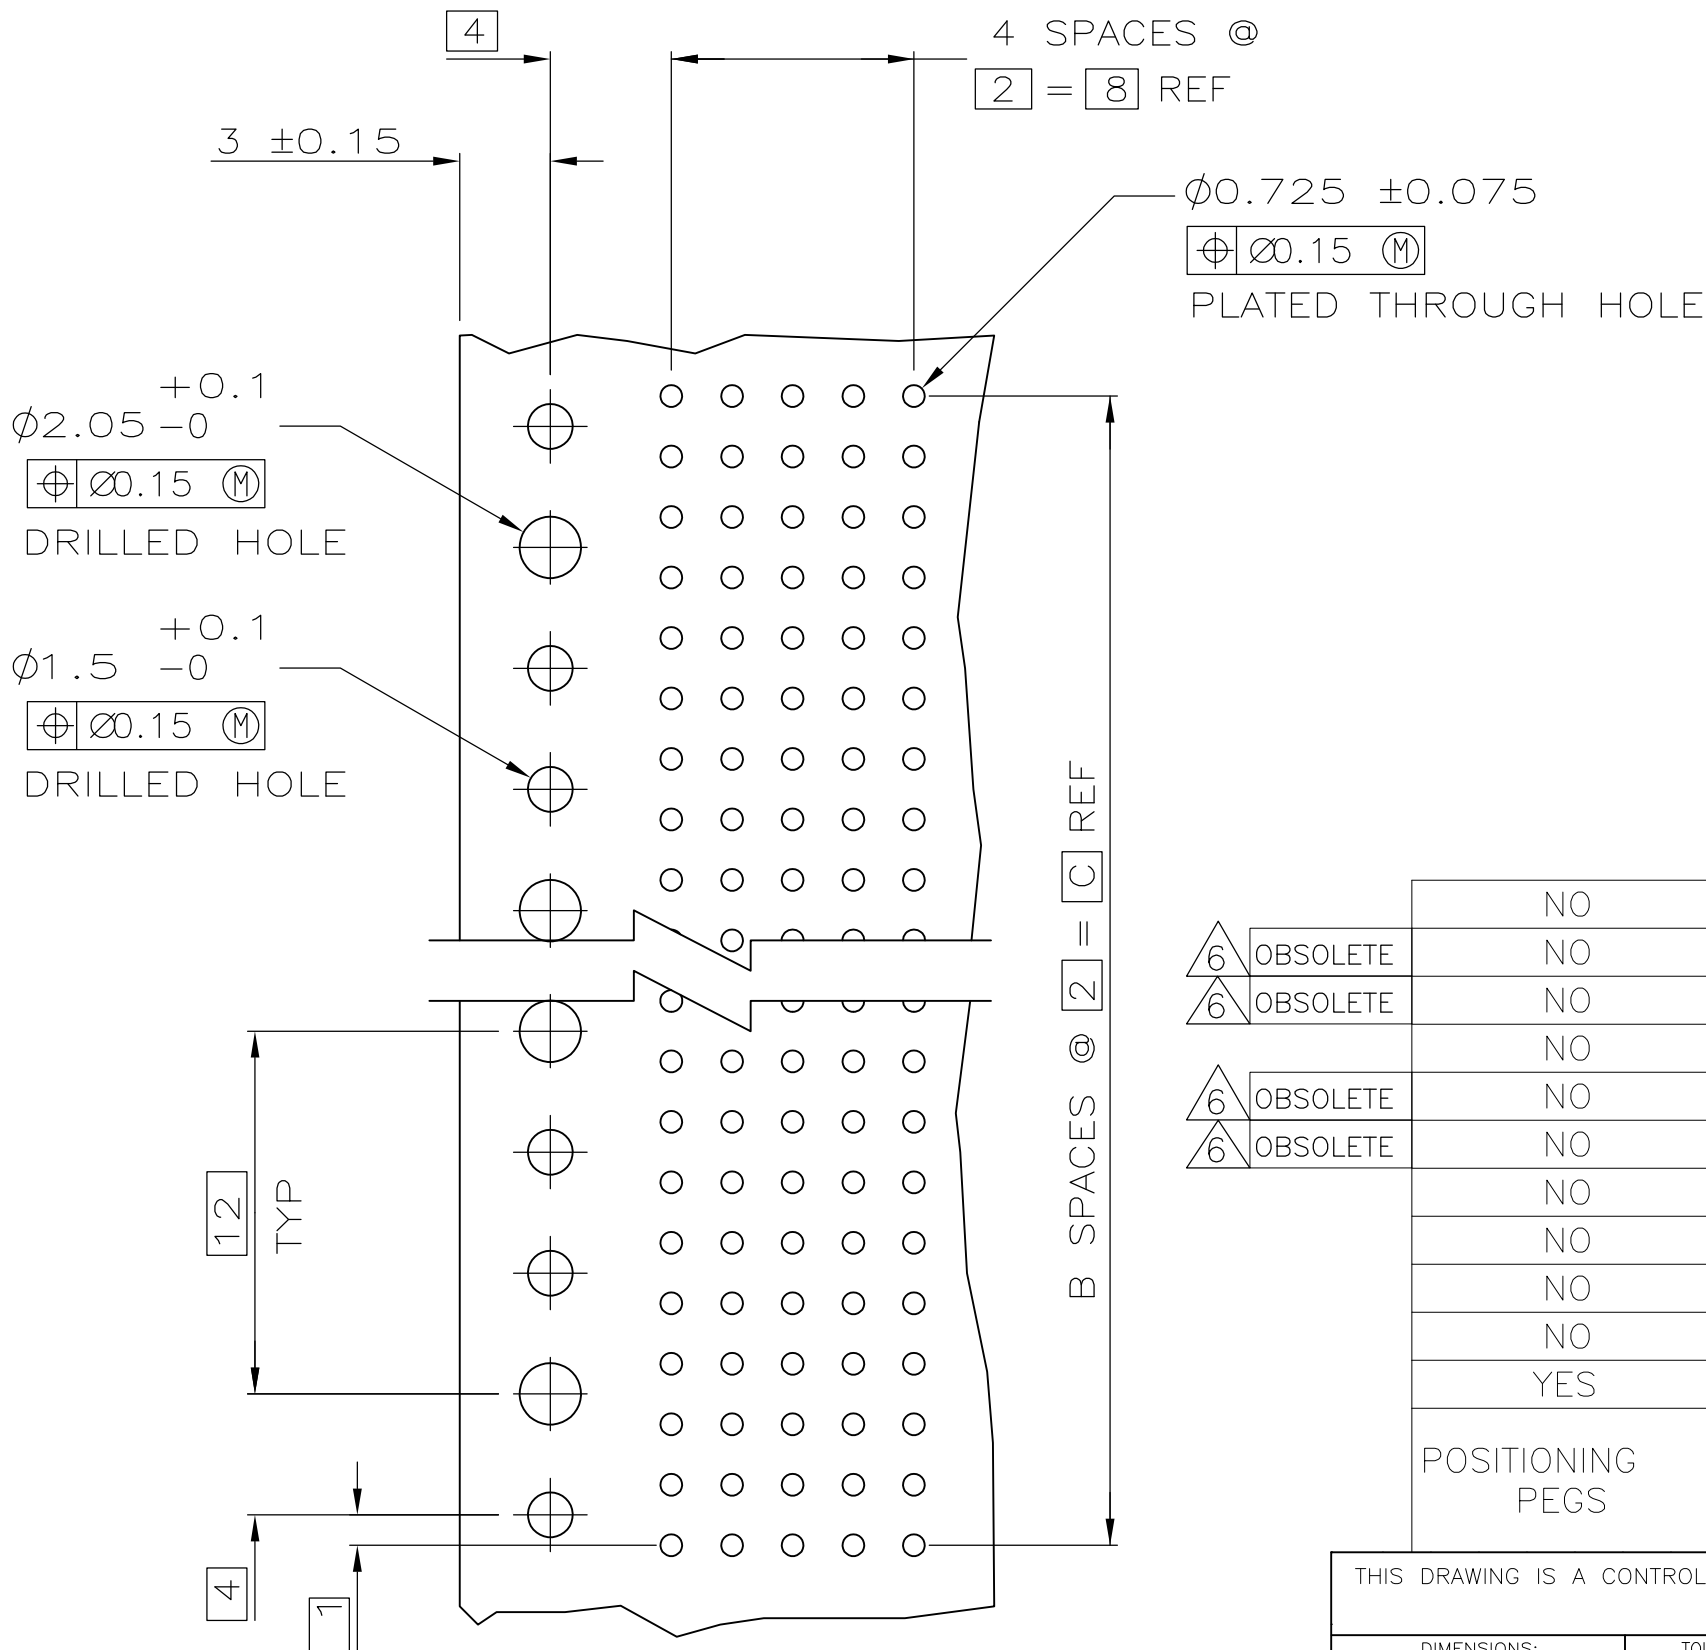
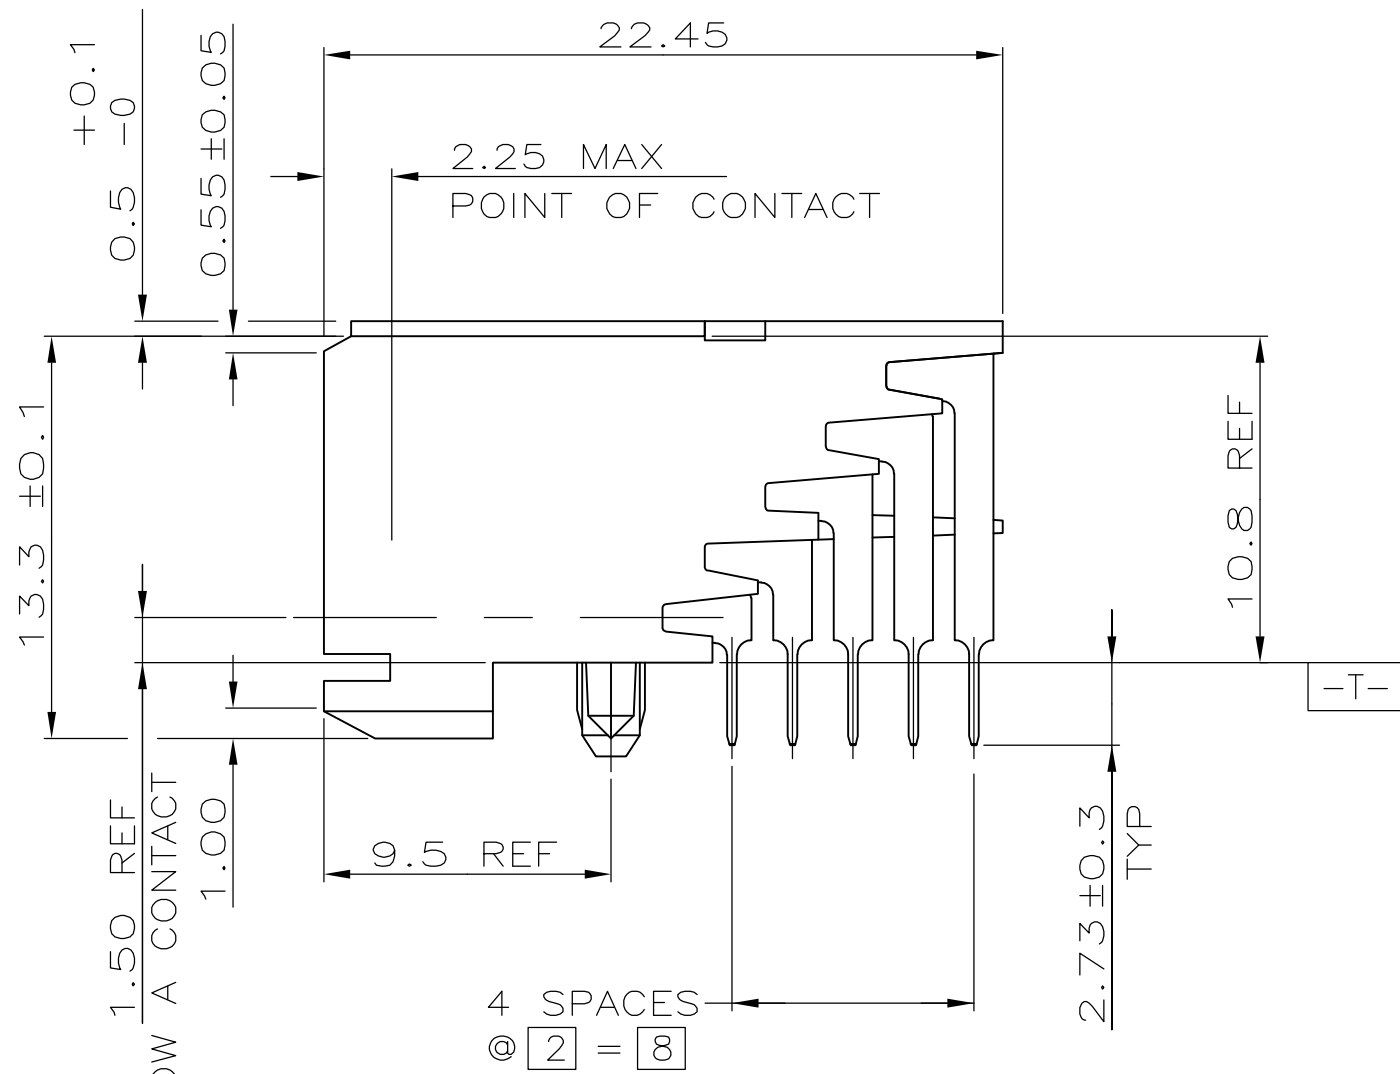
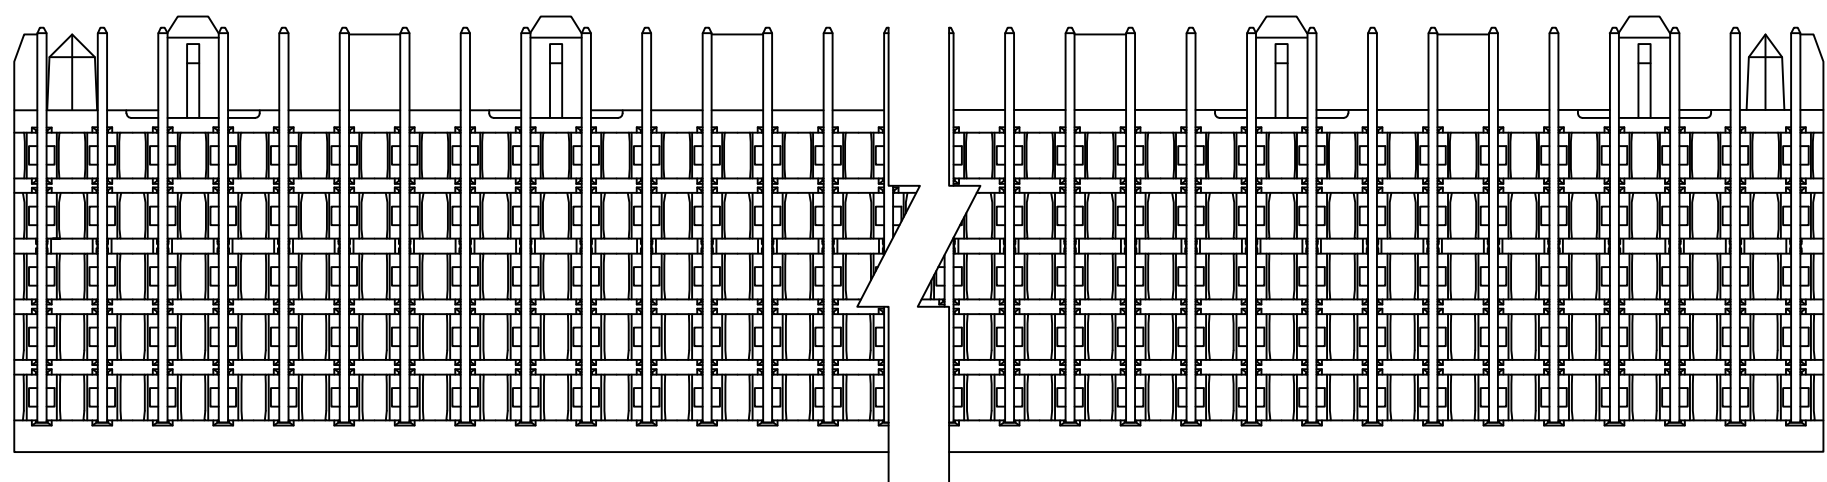
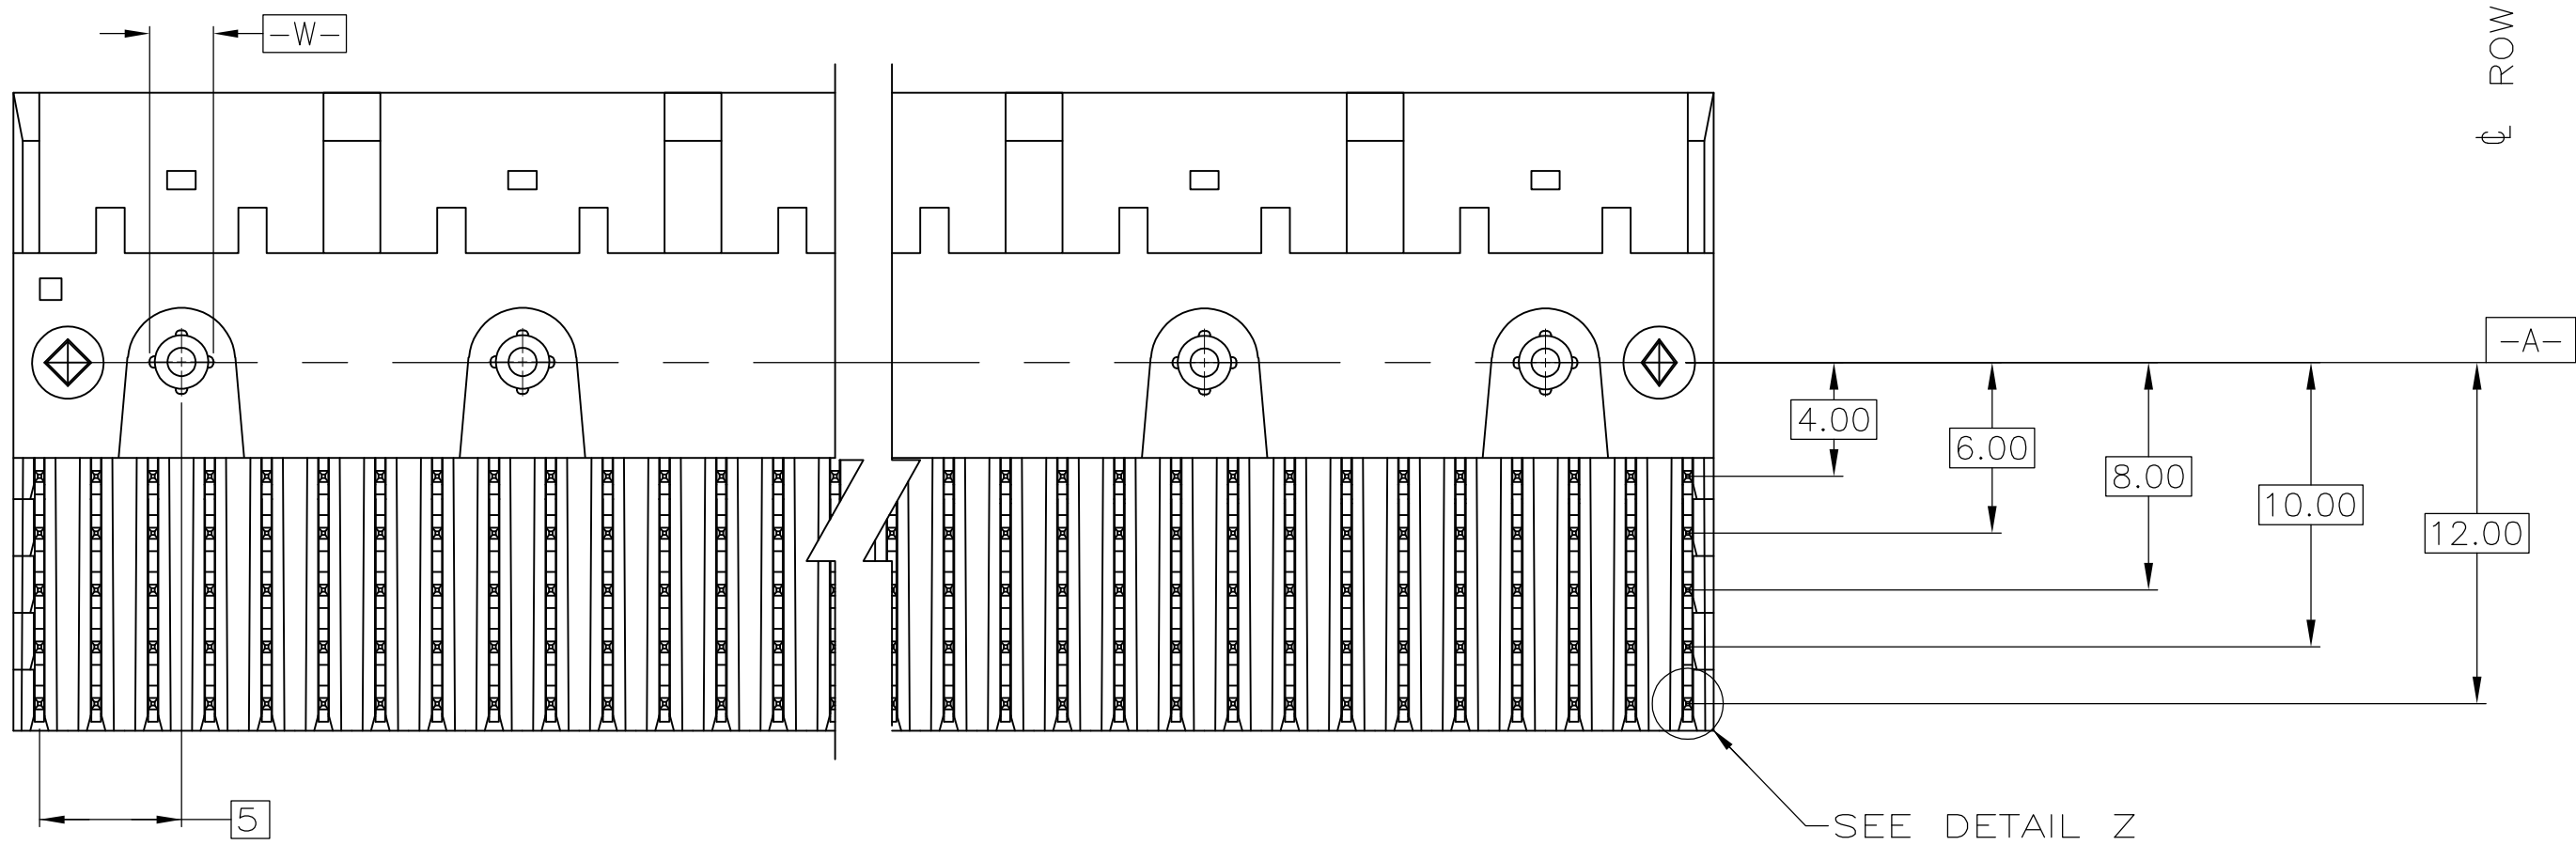
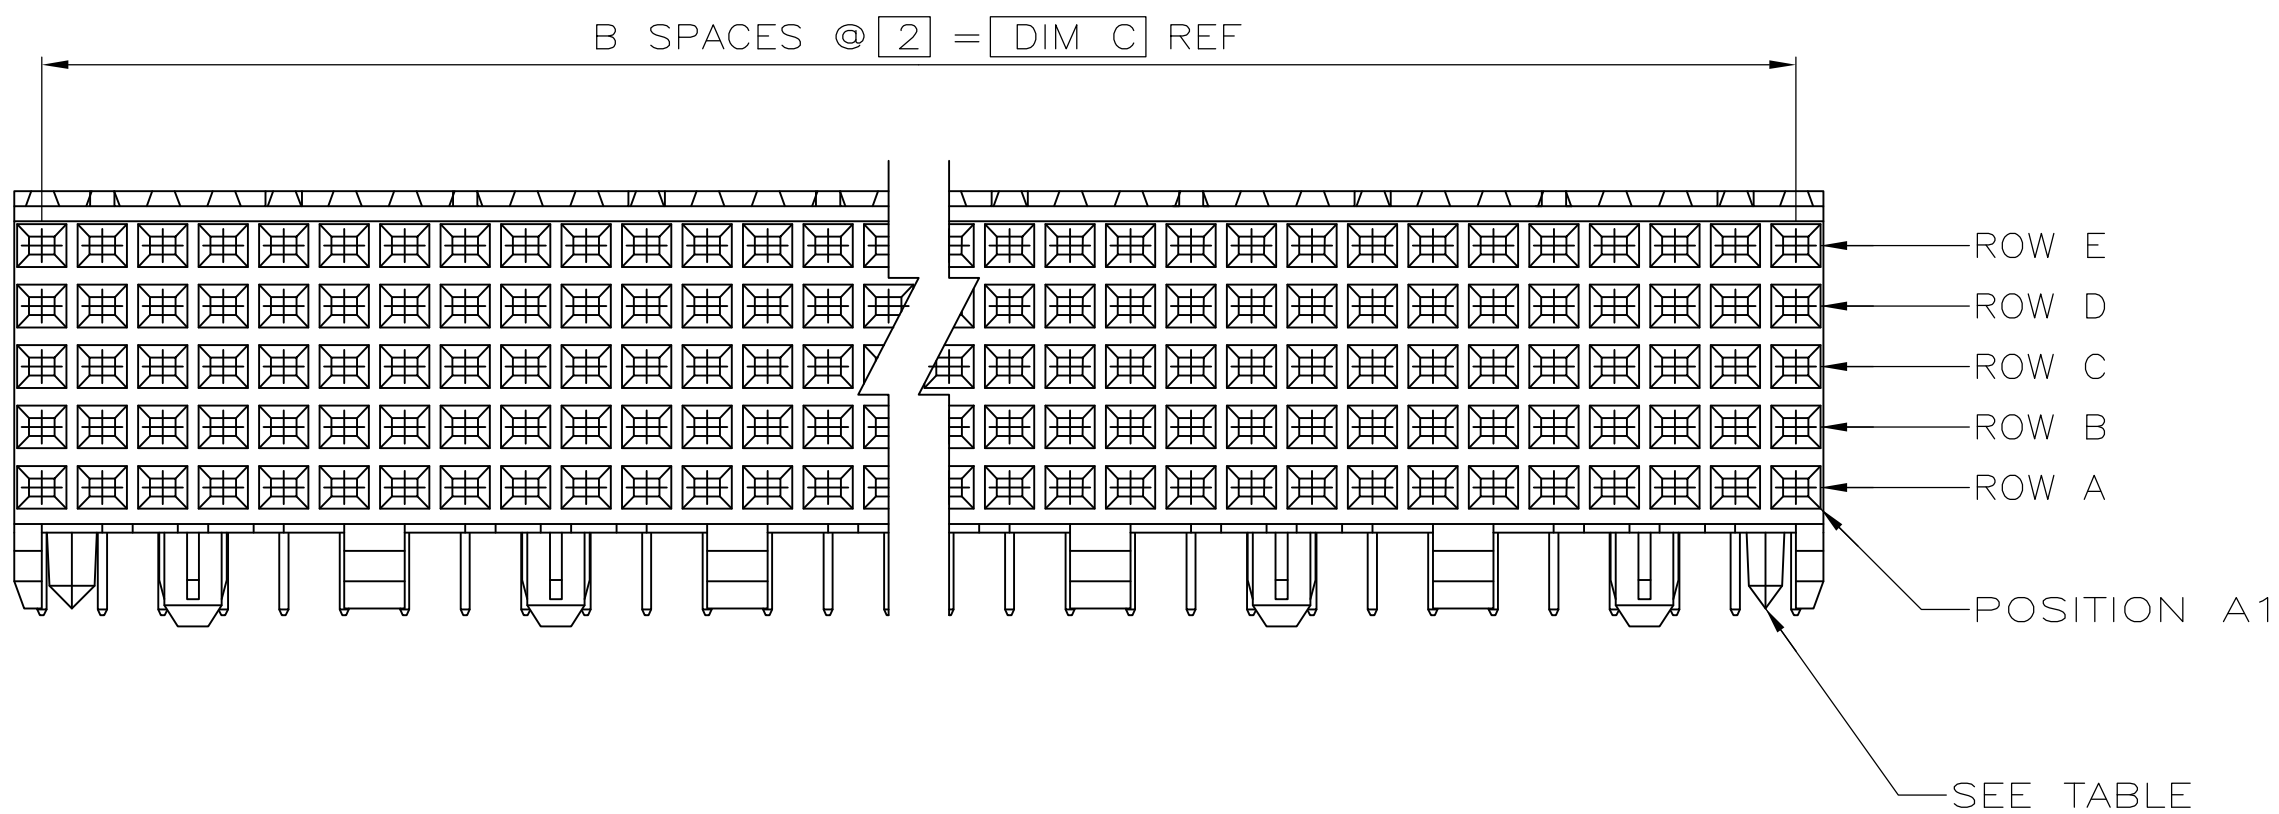



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AD	00	M1		REVISED PER ECO-08-009053	16APR08	DH AS
		M2		REVISED PER ECO-09-021826	07JAN10	KK AEG

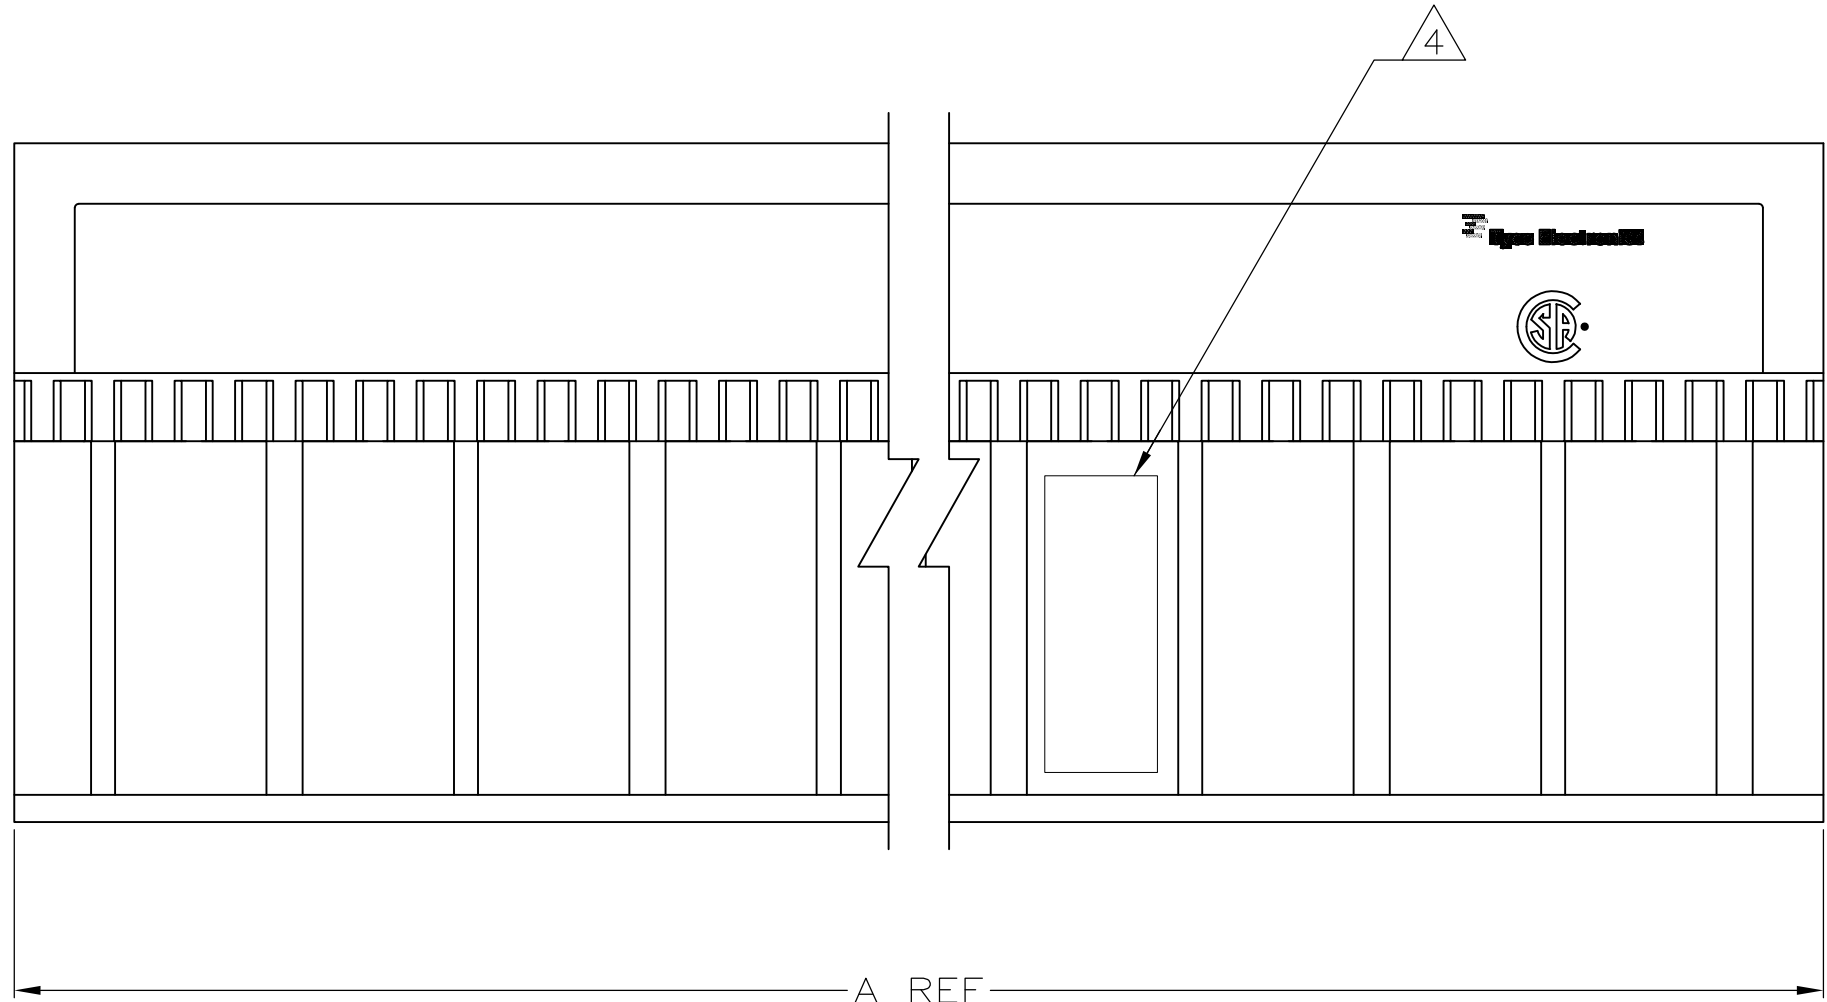

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR-BRONZE.
- 3 CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL.
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS
0.00381 MIN TIN-LEAD OVER UNDERPLATE.
LUBRICATION (ENTIRE CONTACT):
SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- 4 PART MARKING LOCATED APPROXIMATELY AS SHOWN.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

6	OBSOLETE	NO	130	65	131.88	3	330	1-223004-1	
	6	OBSOLETE	NO	118	59	119.88	3	300	1-223004-0
		NO	106	53	107.88	3	270	223004-9	
		NO	94	47	95.88	3	240	223004-8	
		NO	82	41	83.88	3	210	223004-7	
6	OBSOLETE	NO	70	35	71.88	3	180	223004-6	
6	OBSOLETE	NO	58	29	59.88	3	150	223004-5	
		NO	46	23	47.88	3	120	223004-4	
		NO	34	17	35.88	3	90	223004-3	
		NO	22	11	23.88	3	60	223004-2	
		YES	10	3	11.88	3	30	223004-1	
POSITIONING PEGS			C	B	A	FINISH	NO OF SIGNAL POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BUCHHEISTER 07/FEB/96	Tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		CHK D. BAECHTLE 08/FEB/96	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SINISI 08/FEB/96	ASSEMBLY, RECEPTACLE, SIGNAL, RIGHT ANGLE, Z-PACK 2mm FB, 5 ROW, SOLDER LEAD	
		PRODUCT SPEC		
		APPLICATION SPEC		
MATERIAL		WEIGHT	SIZE	
FINISH		—	CAGE CODE	
1 2		A1 00779		DRAWING NO
3 5		CUSTOMER DRAWING		RESTRICTED TO
		SCALE 4:1		SHEET 1 OF 1
				REV M2