

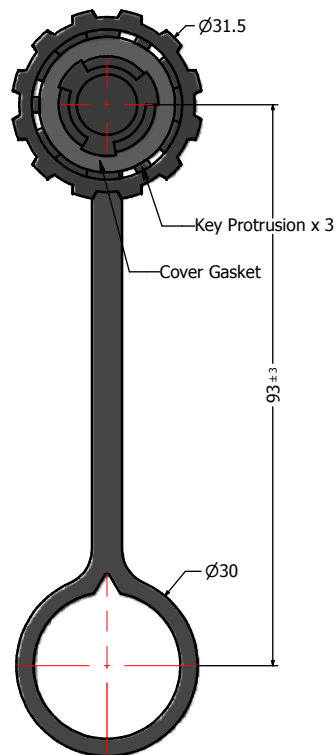
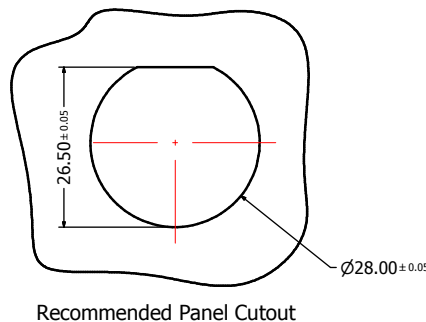





Protective Cover
Bayonet Locking Style
Plastic Version

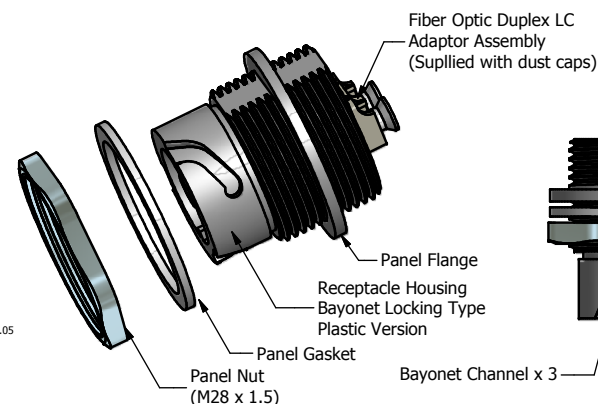

Recommended Panel Cutout



Notes:

- Material and Finish:
 - Receptacle Housing, Protective Cover: Polyester (Black); UL94 V-0
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Cover Gasket: Silicon, Color: White
 - Tether: Polycarbonate, Color: Black
- Duplex LC Adaptor Assembly:**
 - Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40~C to +85~C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Plastic Duplex LC Single Mode Receptacle Assembly + Cover Assembly	17-300230
Plastic Duplex LC Multi Mode Receptacle Assembly + Cover Assembly	17-300240
Plastic Duplex LC APC Single Mode Receptacle Assembly + Cover Assembly	17-300250

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. CONECSHIP OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1.5:1		Dim. in mm	
		Name		Title	Approval Date	0 PLC ± 0.30		1 PLC ± 0.20	Material: See Notes		
						2 PLC ± 0.10	3 PLC ± 0.05	Title: IP67 Industrial Duplex LC			
						ANGLES ± 1°		Receptacle Assembly + Cover Assembly			
						2011	Date	Name	Plastic version		
						Draw.	Mar. 04	Vincent Ke	Drawing No.: 17K1A217		
						Appd.	Mar. 04	J. Chaudry	DIN A3		
						Norm			Sheet 1/1		
						D-old			Part No.: SEE ABOVE TABLE		
											
		a	original								
		Rev.	Changes	Date	Name						