

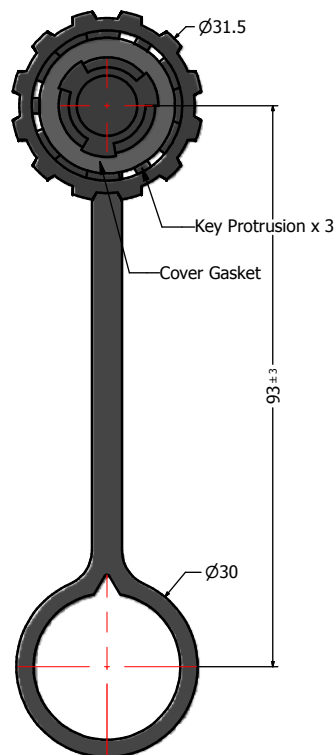
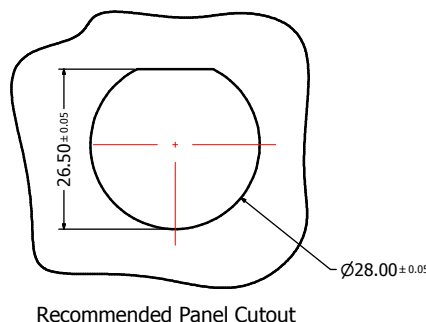




Protective Cover
Bayonet Locking Style
Plastic Version

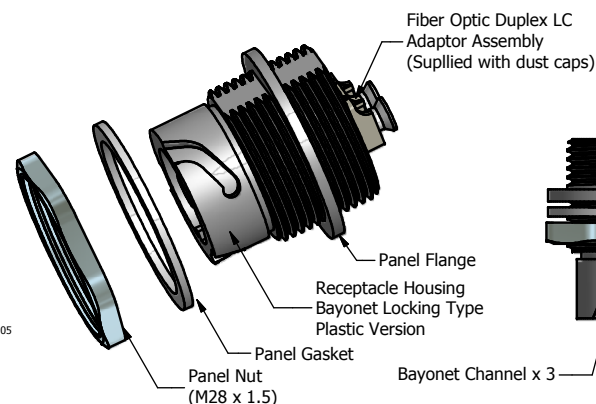

Recommended Panel Cutout



Notes:

1. Material and Finish:

- Receptacle Housing, Protective Cover: Polyester (Black); UL94 V-0
- Panel Nut: Brass, Finish: Nickel Plated
- Panel Gasket: Silicon, Color: White
- Cover Gasket: Silicon, Color: White
- Tether: Polycarbonate, Color: Black

Duplex LC Adaptor Assembly:

- Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
- Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
- Dust Cap: PP, Color: Neutral transparent
- Operating Temperature: -40~C to +85~C

2. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

3. IP67 rated when covered or fully mated with the appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Plastic Duplex LC Single Mode Receptacle Assembly + Cover Assembly	17-300230
Plastic Duplex LC Multi Mode Receptacle Assembly + Cover Assembly	17-300240
Plastic Duplex LC APC Single Mode Receptacle Assembly + Cover Assembly	17-300250

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	DO NOT ALTER CAD DRAWING BY HAND	Customer:				Tolerance Unless otherwise specified 0 PLC ± 0.30 1 PLC ± 0.20 2 PLC ± 0.10 3 PLC ± 0.05 ANGLES ± 1°			Scale: 1.5:1		Dim. in mm		
		Name		Title	Approval Date	Autodesk Inventor			Material: See Notes				
							2011	Date	Name	Title: IP67 Industrial Duplex LC			
							Draw.	Mar. 04	Vincent Ke	Receptacle Assembly + Cover Assembly			
							Appd.	Mar. 04	J. Chaudry	Plastic version			
							Norm			Drawing No.: 17K1A217			
							D-old			DIN A3			
									Part No.: SEE ABOVE TABLE				
										Sheet 1/1			
							Rev.	Changes	Date	Name			