


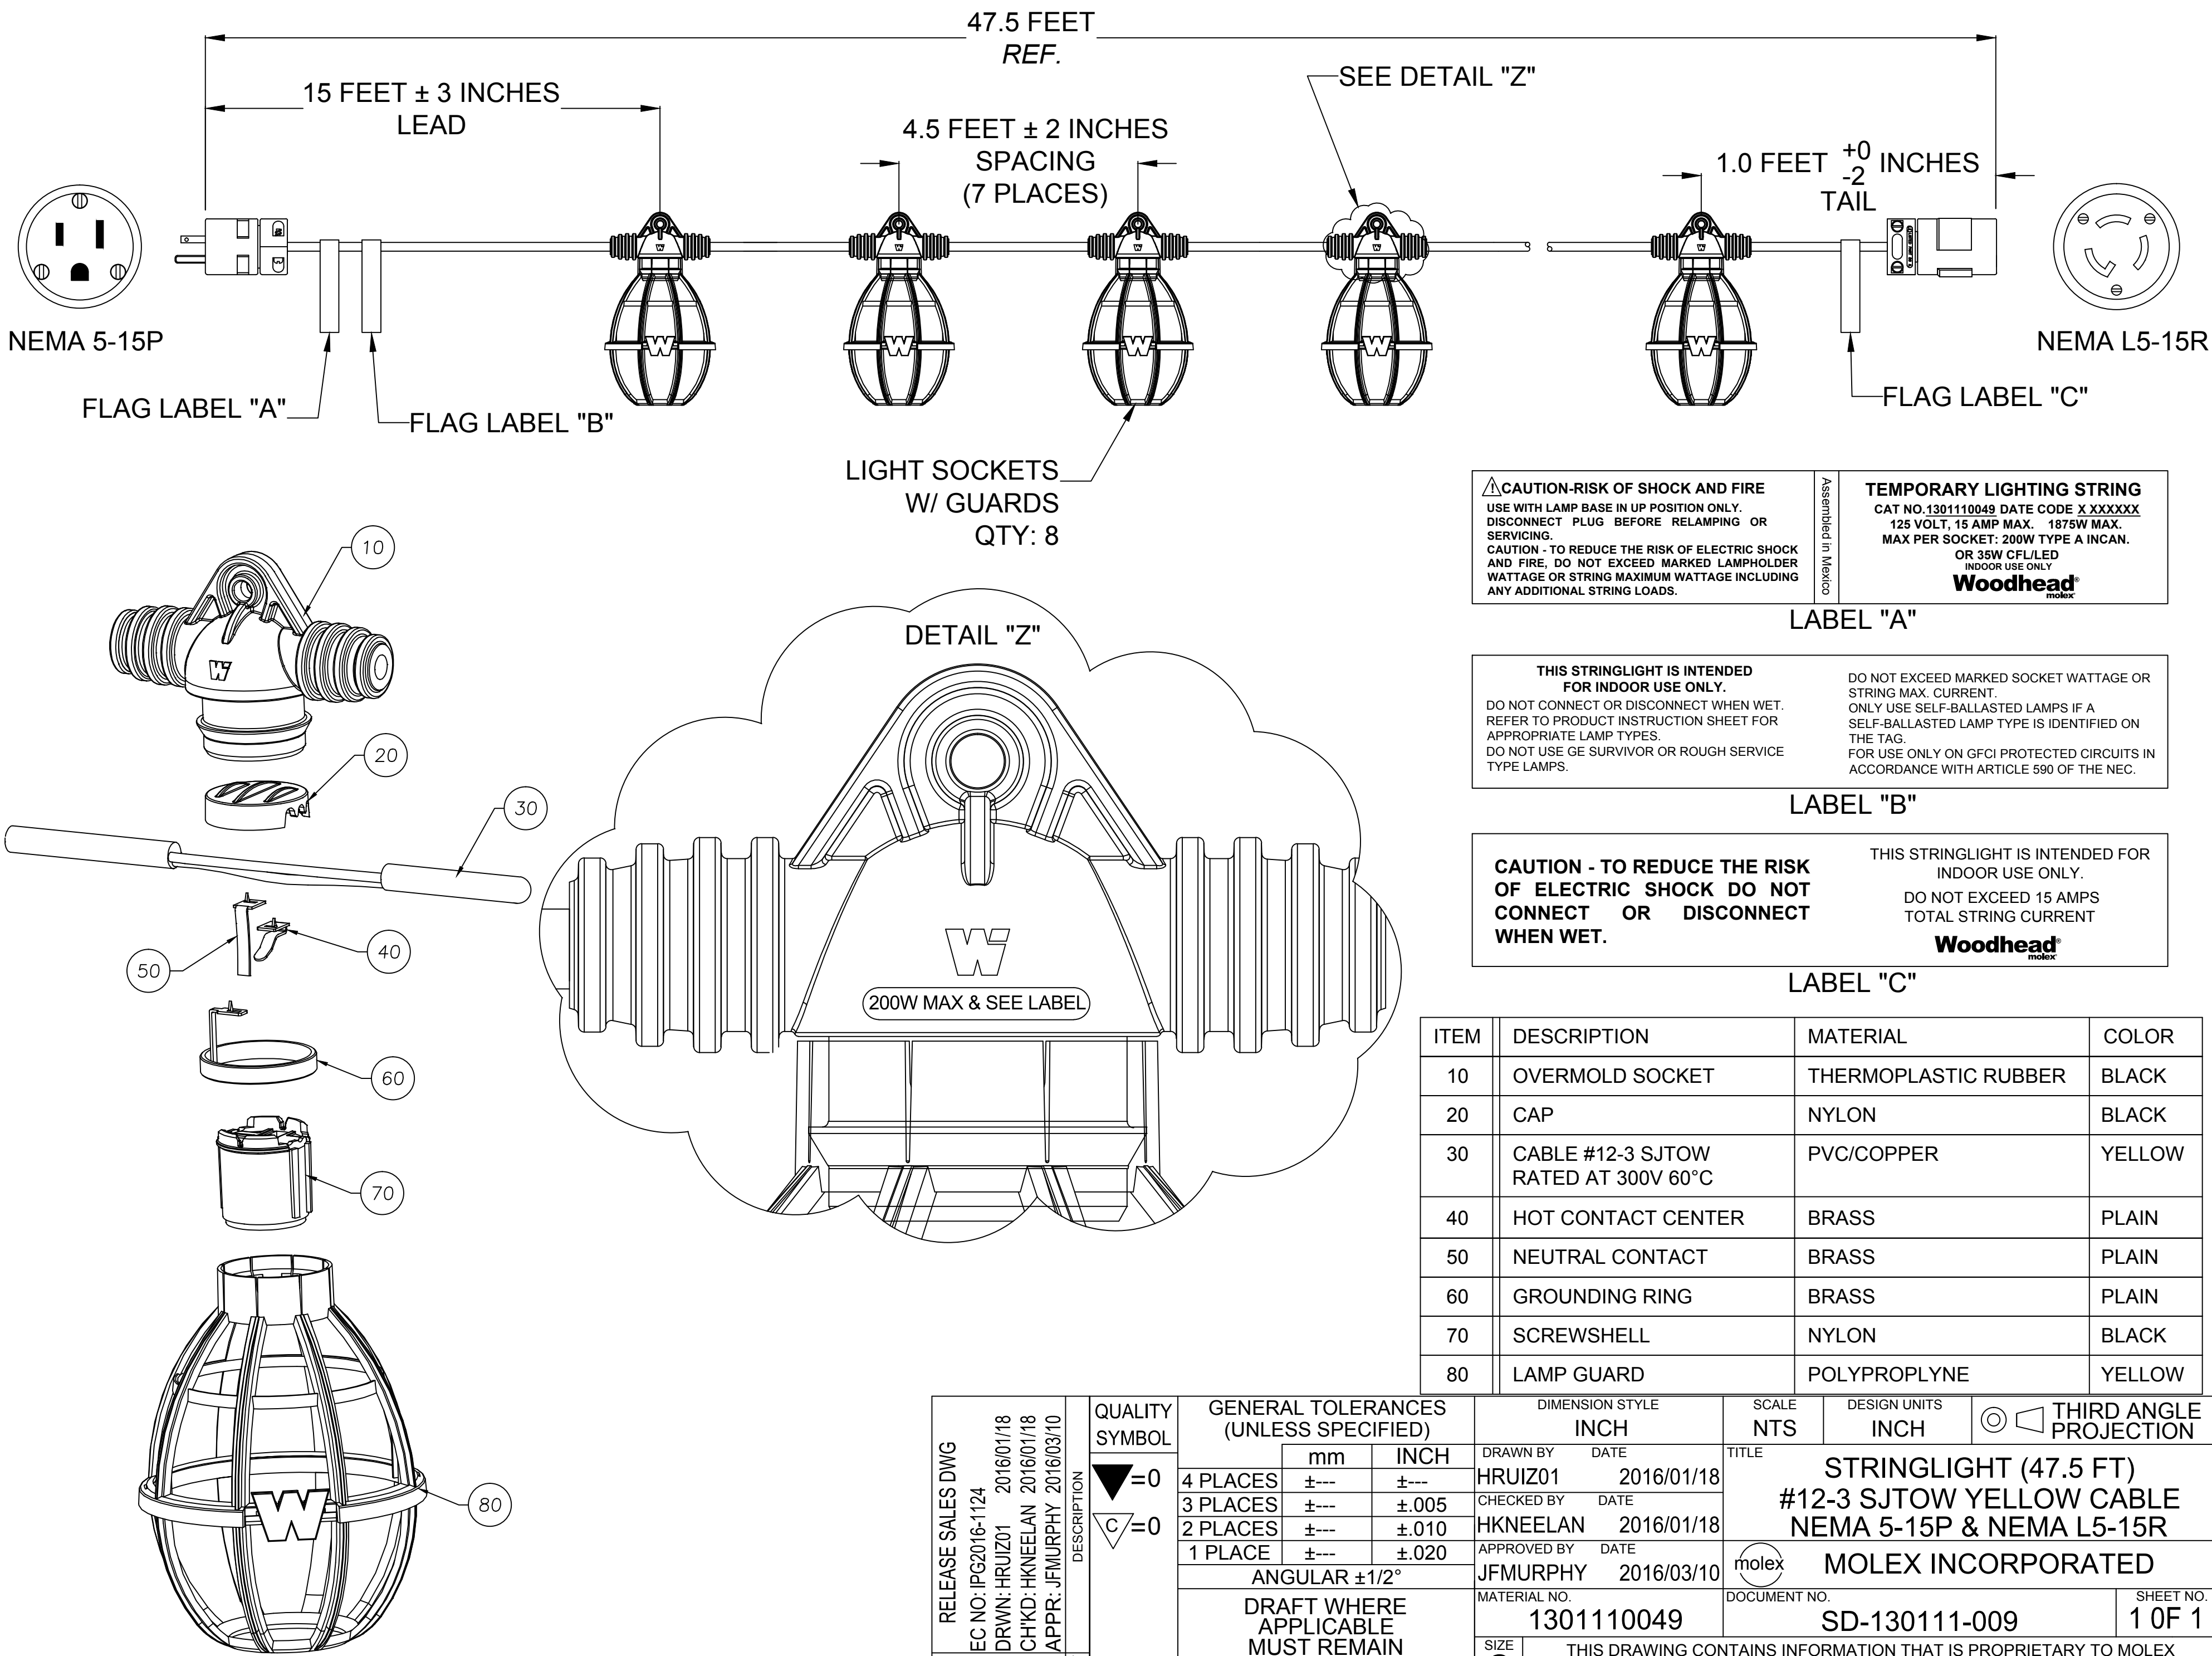

⚠ CAUTION-RISK OF SHOCK AND FIRE
USE WITH LAMP BASE IN UP POSITION ONLY.
DISCONNECT PLUG BEFORE RELAMPING OR SERVICING.
CAUTION - TO REDUCE THE RISK OF ELECTRIC SHOCK AND FIRE, DO NOT EXCEED MARKED LAMPHOLDER WATTAGE OR STRING MAXIMUM WATTAGE INCLUDING ANY ADDITIONAL STRING LOADS.

Assembled in Mexico

TEMPORARY LIGHTING STRING
CAT NO.1301110049 DATE CODE X XXXXXX
125 VOLT, 15 AMP MAX. 1875W MAX.
MAX PER SOCKET: 200W TYPE A INCAN.
OR 35W CFL/LED
INDOOR USE ONLY
Woodhead
molex

LABEL "A"

THIS STRINGLIGHT IS INTENDED FOR INDOOR USE ONLY.
DO NOT CONNECT OR DISCONNECT WHEN WET. REFER TO PRODUCT INSTRUCTION SHEET FOR APPROPRIATE LAMP TYPES.
DO NOT USE GE SURVIVOR OR ROUGH SERVICE TYPE LAMPS.

DO NOT EXCEED MARKED SOCKET WATTAGE OR STRING MAX. CURRENT.
ONLY USE SELF-BALLASTED LAMPS IF A SELF-BALLASTED LAMP TYPE IS IDENTIFIED ON THE TAG.
FOR USE ONLY ON GFCI PROTECTED CIRCUITS IN ACCORDANCE WITH ARTICLE 590 OF THE NEC.

LABEL "B"

CAUTION - TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT CONNECT OR DISCONNECT WHEN WET.

THIS STRINGLIGHT IS INTENDED FOR INDOOR USE ONLY.
DO NOT EXCEED 15 AMPS TOTAL STRING CURRENT
Woodhead
molex

LABEL "C"

ITEM	DESCRIPTION	MATERIAL	COLOR
10	OVERMOLD SOCKET	THERMOPLASTIC RUBBER	BLACK
20	CAP	NYLON	BLACK
30	CABLE #12-3 SJTOW RATED AT 300V 60°C	PVC/COPPER	YELLOW
40	HOT CONTACT CENTER	BRASS	PLAIN
50	NEUTRAL CONTACT	BRASS	PLAIN
60	GROUNDING RING	BRASS	PLAIN
70	SCREWSHELL	NYLON	BLACK
80	LAMP GUARD	POLYPROPYLENE	YELLOW

RELEASE SALES DWG EC NO: IPG2016-1124 DRWN: HRUIZ01 2016/01/18 CHKD: HKNEELAN 2016/01/18 APPR: JFMURPHY 2016/03/10 A		DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 		
					mm	INCH	DRAWN BY HRUIZ01		DATE 2016/01/18	TITLE STRINGLIGHT (47.5 FT) #12-3 SJTOW YELLOW CABLE NEMA 5-15P & NEMA L5-15R			
				4 PLACES	±---	±---	CHECKED BY HKNEELAN		DATE 2016/01/18				
				3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2016/03/10				
				2 PLACES	±---	±.010	MATERIAL NO. 1301110049		DOCUMENT NO. SD-130111-009				
				1 PLACE	±---	±.020							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ±1/2°			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
								SHEET NO. 1 OF 1					