

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0461142161**
Status: **Active**
Overview: EXTreme LPHPower™ Connectors
Description: 1.27mm, 12.00mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, 2 Power Contacts, 16 Signal Contacts, Select Gold (Au) Plating, without BMI Guides

Documents:

[3D Model](#) [Application Specification AS-46114-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-46114-001 \(PDF\)](#)

Agency Certification


CSA LR19880
 UL E29179

General

Product Family PCB Receptacles
 Series 46114
 Application Board-to-Board, Power
 Application Tooling Part Link 62100-6300
 Application Tooling Part Link 62201-8672
 Comments Press Fit Pin
 Overview EXTreme LPHPower™ Connectors
 Product Name EXTreme LPHPower™
 UPC 756054923047

Physical

(p)ower-(s)ignal Configuration 2p - 16s
 Circuits (Loaded) 18
 Circuits (maximum) 18
 Color - Resin Black
 Durability (mating cycles max) 250
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 3.894/g
 Number of Rows 2
 Orientation Vertical
 PCB Locator No
 PCB Retention None
 Packaging Type Tray
 Pitch - Mating Interface 1.27mm, 12.00mm
 Pitch - Termination Interface 1.27mm, 2.50mm
 Plating min - Mating 0.762µm
 Plating min - Termination 2.540µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Stackable No
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +105°C
 Termination Interface: Style Through Hole - Compliant Pin

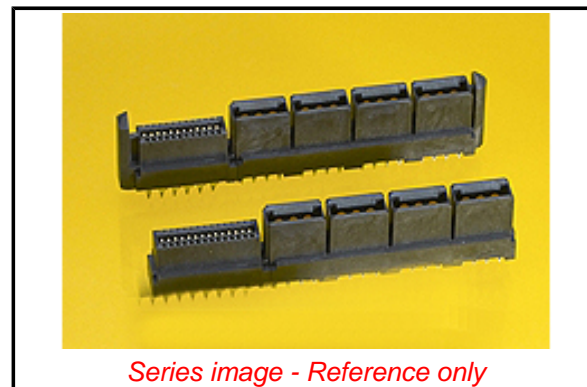

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

46114 Series

Mates With

45985 EXTreme LPHPower™ Header

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Vertical Receptacle	0622018672
Press-In Tool	
LPH Vertical Receptacle Power Terminal Removal Tool	0621006300

Electrical

Current - Maximum per Contact	30.0A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-46114-001
Product Specification	PS-46114-001
Sales Drawing	SD-46114-200

This document was generated on 07/02/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION