



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				DATE	APPD
				ZONE	LTR	DESCRIPTION			
CM	53				A2	CORRECTED DWG TITLE		12-2-92	K5 RS

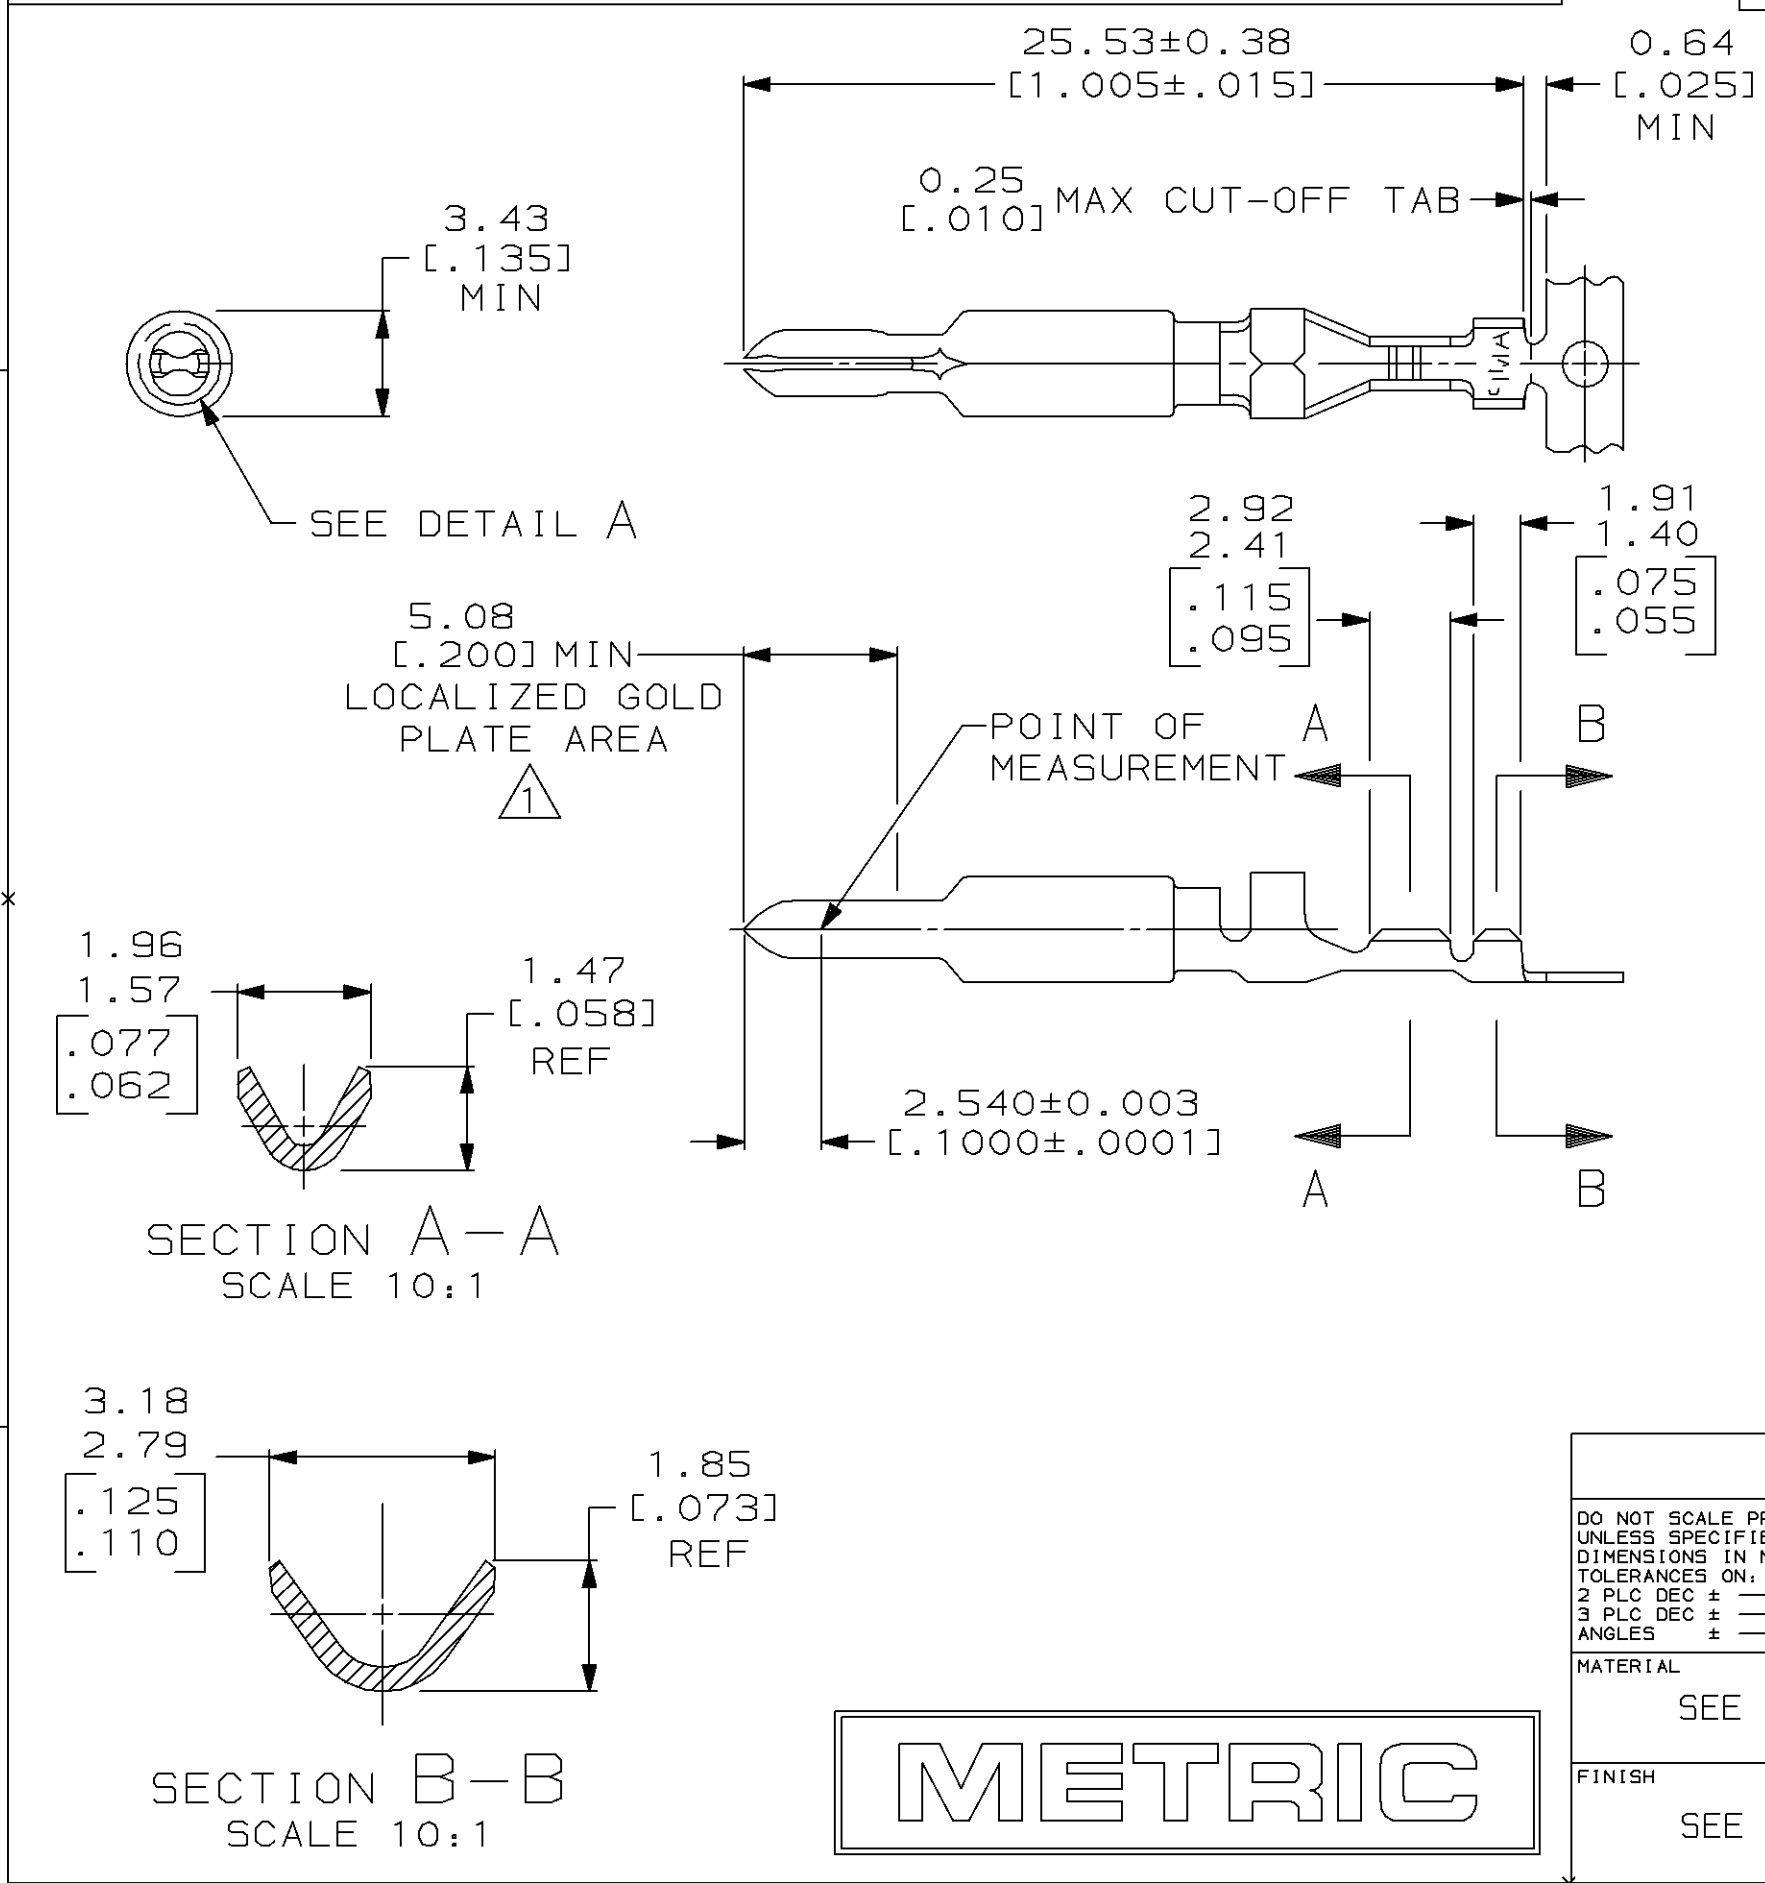

- 1. 0.00076 [.000030] MIN GOLD AT POINT OF MEASUREMENT IN THE LOCALIZED GOLD PLATE AREA, AND ON INSIDE OF WIRE BARREL, OVER 0.00127 [.000050] NICKEL ON ENTIRE CONTACT.
- 2. WIRE RANGE: 0.05-0.15mm² [30-26] AWG. INSULATION RANGE: 0.81-1.45 [.032-.057].
- 3. DIMENSIONS IN BRACKETS ARE IN INCHES.

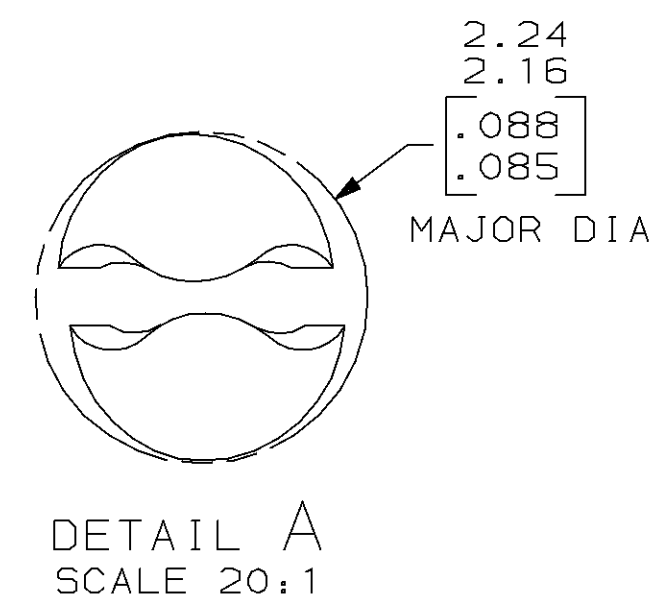

GOLD ¹		0.30 [.012] PH BRZ	770011-6
FINISH		MATERIAL	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MM [INCHES] TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± ANGLES ± MATERIAL SEE TABLE FINISH SEE TABLE		DR 2-24-89 K. WHITAKER	AMP AMP INCORPORATED Harrisburg, Pa. 17105
		CHK 2-24-89 R. SWING	
		APPD 2-24-89 D. KLEIN	
		APPD 2-24-89 D. KLEIN PRODUCT SPEC	
		NAME	PIN, UNIVERSAL MATE-N-LOK™ II
		SIZE	B
		FSCM NO	00779
		DRAWING NO	770011
		SCALE	4:1
		SHEET	1 OF 1